
	10	9	8	7		6		5	4		3
	FACE	FACE VIEW-FEMALE INSERT									
F	2	GREEN 1 RED/E	LK 1 RED/WHT								
E	2 BLUE 2	RED/BLK 2 RED/ RED/WHT 3 RED 4 GREE	3 GREEN		_ 2.25 [8 REI 38 [9.6 REF.	F	-	FIN	ISH LENGTH —		4.00 [1 RE
D								WRA	P LABEL		
С	SPECIFICATIC	DNS			POL			SXXXXX GTH	COUP	LING NUT	
	MATERIALS: COUPLING NU	JT: SEE CHART				2 3 4		M01 M10	0 - 1 METER 0 - 10 METER	1 - SS 2 - N-N 3 - NB	М
В	INSERT: PVC, OVERMOLD: F CABLE: 18AW(	VC, YELLOW	D PLATED	ENDENT ON POLE C	OUNT	5		F600	) - 6 FEET ) - 60 FEET	8 - SS BLANI	HEX K - ZINC STR
	ELECTRICAL: CURRENT RA VOLTAGE: 300	TING: 10A (2P & 3P), )V	7A (4P), 5.6A (5P)			4SE 04 2014/07/17 2014/07/18 2014/08/02	QUALITY SYMBOLS	(UNLES	L TOLERANCES SS SPECIFIED) mm INCH	DRAWN	
A	MECHANICAL: TEMPERATUR PROTECTION:			INITIAL RELE/ EC NO: IPG2015-01 DRWN: BARDEN CH'KD: BRUPERT APPR: JFMURPHY		3 PLACES 2 PLACES 1 PLACE ANG	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		EN 2014, DBY DATE ERT 2014, ED BY DATE RPHY 2014, L NO. EE CHAR THIS DRAWIN INCORPORATE		
	10	9	8	7		6		5	4		3

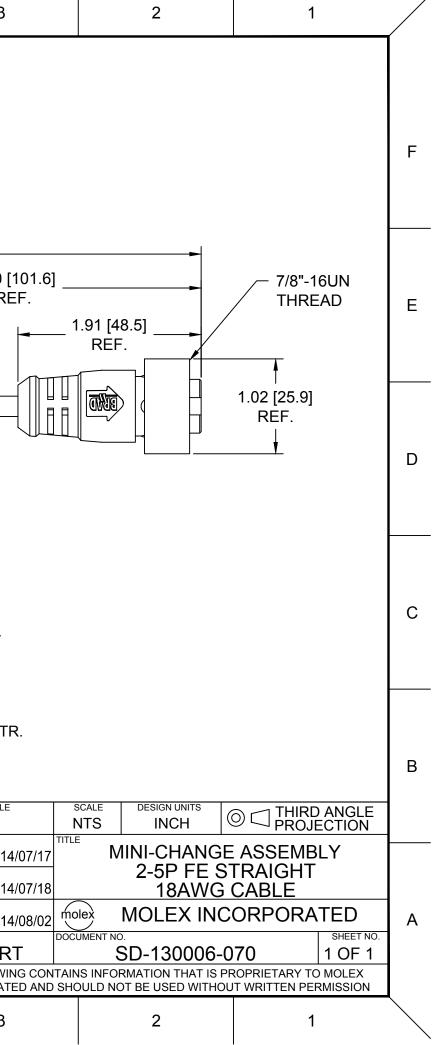

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex: 1300090807