

12

11

## TECHNICAL

19

18

17

16

15


14

LISTED: RATED SUPPLY VOLTAGE: RATED CURRENT: **RESET TYPE: OPERATING FREQUENCY:** TYPE: GROUND TRIP CURRENT: **OVERLOAD CURRENT: INSULATION VOLTAGE:** ENDURANCE OPERATIONS: ENCLOSURE:

UL & CSA 240VAC UP TO 30 AMPS AUTOMATIC OR MANUAL 60 Hz CLASS A 5mA +/- 1mA 180 AMPS, 0.45PF 1,500 VRMS - 1 MINUTE 3000 OPERATIONS NEMA 4X/6P

A	DOCUMENT STATUS P1		P1	RELEASE DATE		2021/08/17	7 20:36:52			
8	FORMAT: Eng-legs-master-tb-prod-D REVISION: E DATE: 2020/01/14	19		18		17	16	15	14	13



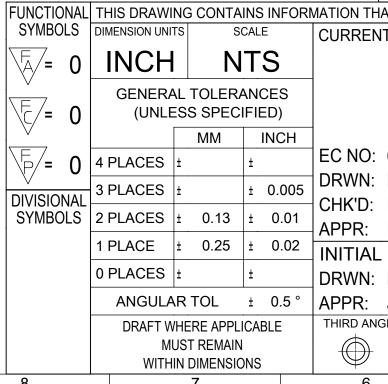

	—— (3.38)											L
	SPECIFIC/ XXXX-XXXXX D: XXXXXX XXXX PE: XXXXXX RE: NEMA 4X XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	LISTING: C	CLASS A									к
	EE DOES NOT PROTEX THE TO CONTACT WITH IN NEUTRAL CONDUTOR IG SUPPLYIG THIS DEV AL EXTENSION CORD TO DURCE. AS LINE SIDE( ED.	T AGAINST E PHASE TO PH S OR DUE TO /ICE. SO NOT O CONNECT POWER IN) IS	ASE OR A FAULT I USE GFCI TO NOT									J
	Woodł	nead										н
						- SPECIFICA	TIONS LA	BEL				G
												F
												E
[												
	RESET T	YPE	MATERIAL NO			ENGINEERING NO. 30051-2MF						D
	MANU	MANUAL		301530264 301530266		30053-2	SINGLE PHASE					
	AUTOMATIC		1301530263			30053-2MF 30051-2AF			SINGLE			
			1301530265			30053-2AF			SINGLE PHASE			
NT REV DESC: MIGRATION TO ECTR/NX : 666699 : PPURSUTANDEL 2021/07/09												С
						30A 240VAC FIXED GFCI SINGLE PHASE #10AWG WIRE LEADS						
	DNGUYEN62 2021/08/05 HKNEELAND 2021/08/17									REVISION	В	
L REVISION: : BARDEN 2014/04/25 JFMURPHY 2014/08/02						SD-130153-042			PSD	001	A1	
N		draw				TERIAL NUMBER	CUSTOMER GENERAL MAI				NUMBER	A
							•				l	

4

1

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex: 1301530266