

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2040586101](#)
Status: **Active**
Overview: QSFP-DD Interconnect System and Cable Assemblies
Description: QSFP-DD Assembly, Stacked 2x1, 4.50mm Fin Heat Sink

Documents:

3D Model	Test Summary 2040580002-000 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
3D Model (PDF)	

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	I/O Connectors
Series	204058
Application	Module-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	QSFP-DD Interconnect System and Cable Assemblies
Product Name	QSFP-DD
Type	N/A
UPC	191128419888

Physical

Circuits (Loaded)	152
Circuits (maximum)	152
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	52.478/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	1.70mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.53mm min.
Packaging Type	Tray
Panel Mount	N/A
Pitch - Mating Interface	0.80mm
Plating min - Mating	0.760µm
Plating min - Termination	0.760µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	2
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

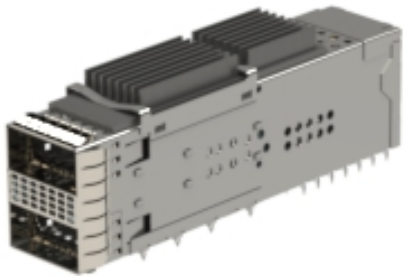

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)9139-DC (19
Jan 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[204058](#) Series

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Extraction Tool for 2-by-1 QSFP-DD Multi-Port Connector with Press-Fit Tails	2001991270
Insertion Tool for QSFP-DD Cage Assembly with Heat Sink, 2-by-1 Multi-Port Connector with Elastomeric Gasket for SAN Applications with Heatsink	2002141230

Electrical

Current - Maximum per Contact	0.5A
Grounding to Panel	Yes
Shielded	Yes

Material Info

Reference - Drawing Numbers

Sales Drawing	2040586103-ASY
Test Summary	2040580002-000

This document was generated on 03/31/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[204058-6101](#)