

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

2162701080

Status:


Active

Overview:

SL Modular Connectors

Description:

SL Female-to-SL Female Off-the-Shelf (OTS) Cable Assembly, Positive Lock, Single Row, 50.00mm Length, Tin (Sn) Plating, 8 Circuits, Black

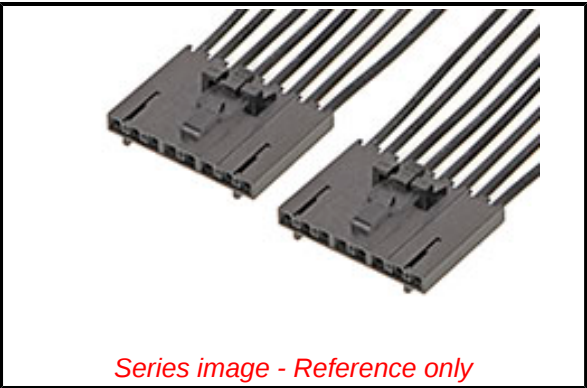

Documents:

3D Model

3D Model (PDF)

Drawing (PDF)

Datasheet (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Cable Assemblies
Series	216270
Application	Signal, Wire-to-Board, Wire-to-Wire
Assembly Configuration	Dual Ended Connectors
Connector to Connector	SL-to-SL
Overmolded	No
Overview	SL Modular Connectors
Product Name	SL
Type	Discrete Wire Assembly
UPC	193264730797
Physical	
Cable Length	50.00mm
Circuits (Loaded)	8
Color - Resin	Black
Gender	Female-Female
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Net Weight	4.809/g
Number of Rows	1
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Single Ended	No
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.63mm max.
Wire Size AWG	22
Wire/Cable Type	UL 11028
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	600V AC/DC
Material Info	
Reference - Drawing Numbers	
Sales Drawing	2162701080-000

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

Green Image

REACH SVHC

Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free

Not Low-Halogen

Status

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

216270 Series

Mates With

SL Housing [70018](#) , [70107](#) . SL Vertical Header [70543](#) , [70545](#) , [70541](#) , [74099](#) . SL Right-Angle Header [70553](#) , [70555](#) , [70551](#) , [70634](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[216270-1080](#)