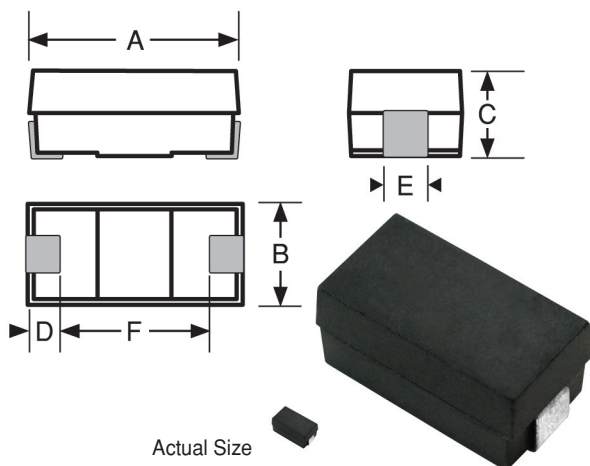


SERIES**P3519R**
P3519**Surface Mount Power Inductors****Physical Parameters**

	Inches	Millimeters
A	0.350 to 0.370	8.89 to 9.40
B	0.180 to 0.200	4.57 to 5.08
C	0.165 to 0.185	4.19 to 4.70
D	0.050 Min.	1.27 Min.
E	0.050 to 0.070	1.27 to 1.78
F	0.200 (Ref. Only)	5.08 (Ref. Only)

Dimensions "A" and "C" are over terminals


Operating Temperature Range -55°C to +130°C**Current Rating at 85° Ambient** 45°C Rise**Maximum Power Dissipation at 90°C** 0.414 W**Inductance** Measured at 1VAC with no DC Current**Incremental Current** The current at which the inductance will be decreased by a maximum of 10% from its initial DC value**Marking** DELEVAN, INDUCTANCE VALUE followed by a P, and DATE CODE/LOT SYMBOL (YYWWL). Note: An "R" before the date code/lot symbol indicates an RoHS Compliant choke

Example: P3519-104J

 DELEVAN
 100uH P
 1323A
Terminal Material and Final Finish

Series P3519: (Tin-Lead) Sn63Pb37 over (Copper) Cu

Series P3519R: (Tin-Silver-Copper) Sn96.5Ag3.0Cu0.5 over (Copper) Cu

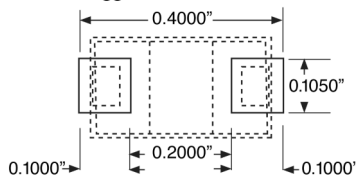Weight/Mass 0.490 Grams Maximum**Packaging** Tape & reel (24mm):
13" reel, 1500 pieces max.**Suggested Land Pattern**INDUCTANCE (μH) @ 10KHz
DASH NUMBER*

TOLERANCE

DC RESISTANCE
MAXIMUM (OHMS)CURRENT RATING
MAXIMUM (A)INCREMENTAL
CURRENT DC (A)**SERIES P3519 FERRITE CORE**

-101K	0.10	±10%	0.01	5.35	13.66
-121K	0.12	±10%	0.01	5.11	12.47
-151K	0.15	±10%	0.01	4.83	11.15
-181K	0.18	±10%	0.01	4.62	10.18
-221K	0.22	±10%	0.02	4.39	9.21
-271K	0.27	±10%	0.02	3.17	8.31
-331K	0.33	±10%	0.02	3.97	7.52
-391K	0.39	±10%	0.02	3.81	6.92
-471K	0.47	±10%	0.02	3.63	6.30
-561K	0.56	±10%	0.02	3.48	5.77
-681K	0.68	±10%	0.03	3.31	5.24
-821J	0.82	±5%	0.03	3.16	4.77
-102J	1.0	±5%	0.03	3.01	4.32
-122J	1.2	±5%	0.04	2.88	3.94
-152J	1.5	±5%	0.04	2.72	3.53
-182J	1.8	±5%	0.04	2.60	3.22
-222J	2.2	±5%	0.05	2.47	2.91
-272J	2.7	±5%	0.09	1.85	2.63
-332J	3.3	±5%	0.10	1.76	2.38
-392J	3.9	±5%	0.10	1.69	2.19
-472J	4.7	±5%	0.11	1.61	1.99
-562J	5.6	±5%	0.12	1.54	1.83
-682J	6.8	±5%	0.14	1.47	1.66
-822J	8.2	±5%	0.24	1.11	1.50
-103J	10	±5%	0.26	1.06	1.37
-123J	12	±5%	0.29	1.01	1.25
-153J	15	±5%	0.32	0.96	1.12
-183J	18	±5%	0.35	0.91	1.02
-223J	22	±5%	0.39	0.87	0.92
-273J	27	±5%	0.43	0.83	0.83
-333J	33	±5%	0.75	0.63	0.75
-393J	39	±5%	0.81	0.60	0.69
-473J	47	±5%	0.89	0.58	0.63
-563J	56	±5%	0.98	0.55	0.58
-683J	68	±5%	1.07	0.52	0.52
-823J	82	±5%	1.96	0.39	0.48
-104J	100	±5%	2.17	0.37	0.43
-124J	120	±5%	2.38	0.35	0.39
-154J	150	±5%	2.66	0.33	0.35
-184J	180	±5%	4.48	0.26	0.32
-224J	220	±5%	4.95	0.24	0.29
-274J	270	±5%	5.48	0.23	0.26
-334J	330	±5%	6.06	0.22	0.24
-394J	390	±5%	10.3	0.17	0.22
-474J	470	±5%	11.3	0.16	0.20
-564J	560	±5%	12.3	0.16	0.18
-684J	680	±5%	13.6	0.15	0.17
-824J	820	±5%	24.2	0.11	0.15
-105J	1000	±5%	26.7	0.11	0.14
-125J	1200	±5%	29.3	0.10	0.12
-155J	1500	±5%	32.8	0.10	0.11
-185J	1800	±5%	35.9	0.09	0.10
-225J	2200	±5%	39.7	0.09	0.09

Tolerances: J = ±5% K = ±10%

(±5% Tolerance is Standard for Values Above 0.68uH)

*Complete part # must include series # PLUS the dash #

All product specifications and data contained herein are subject to change without notice to improve reliability, function, performance, design or otherwise.

Made In the U.S.A.

SERIES







**P3519R
P3519**

RoHS
Compliant

Traditional
First Quality

Surface Mount Power Inductors

Inductance vs. Frequency

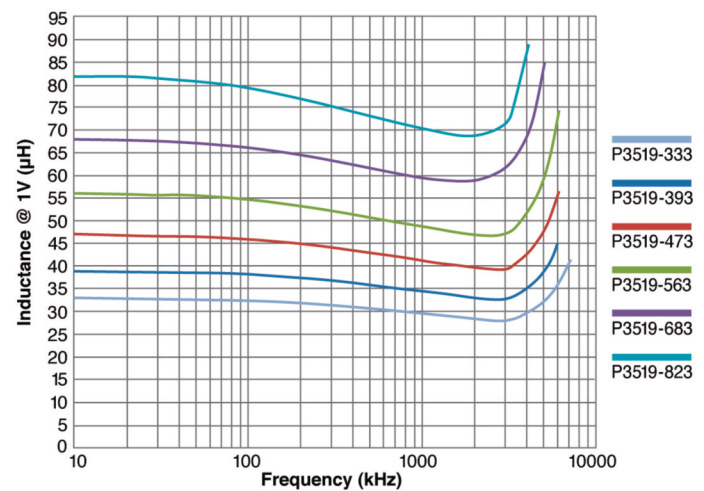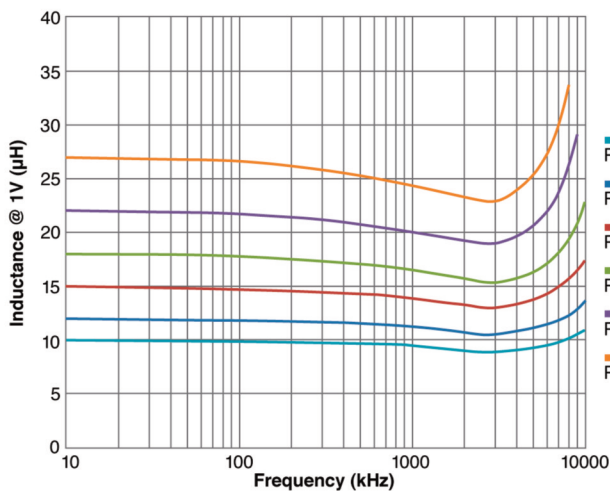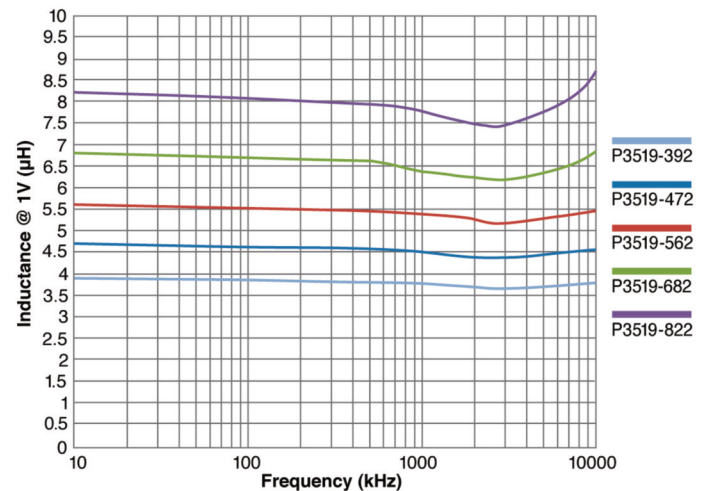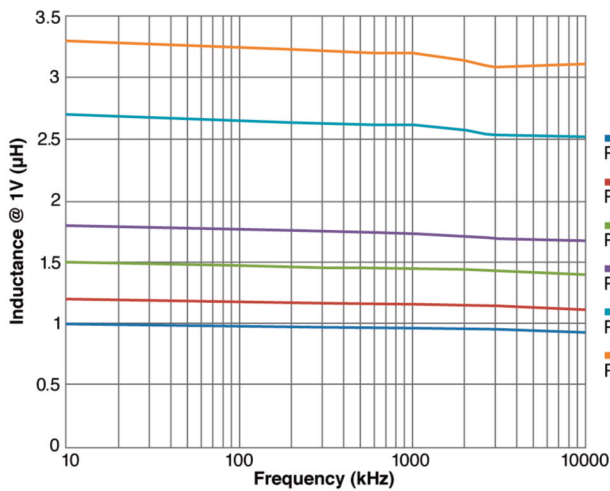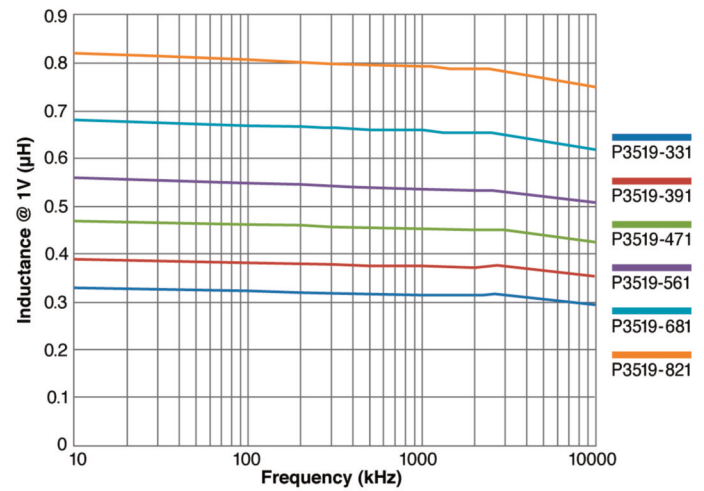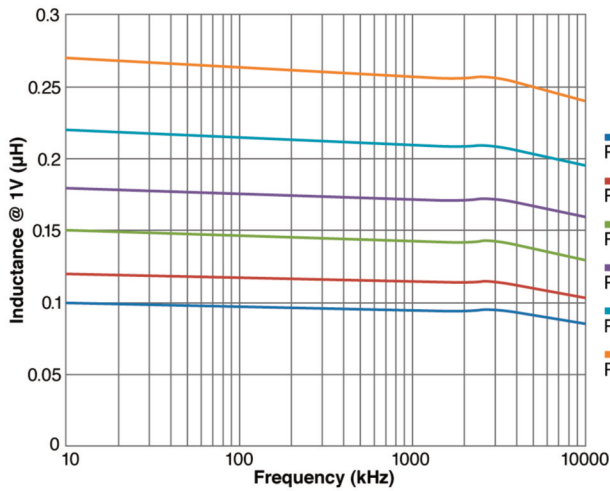

SERIES




P3519R
P3519

RoHS
Compliant

Traditional
First Quality

Surface Mount Power Inductors

Inductance vs. Frequency

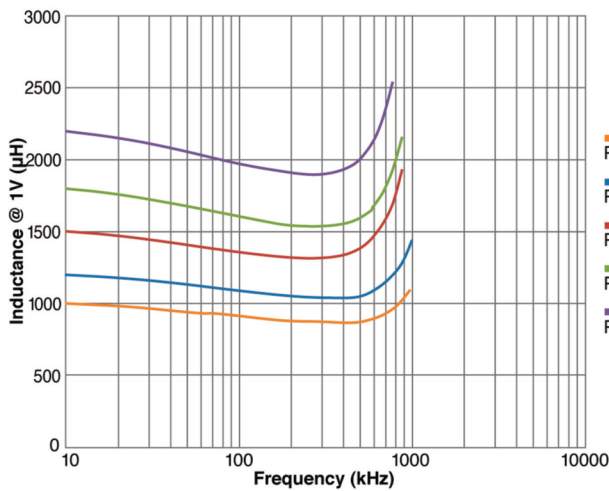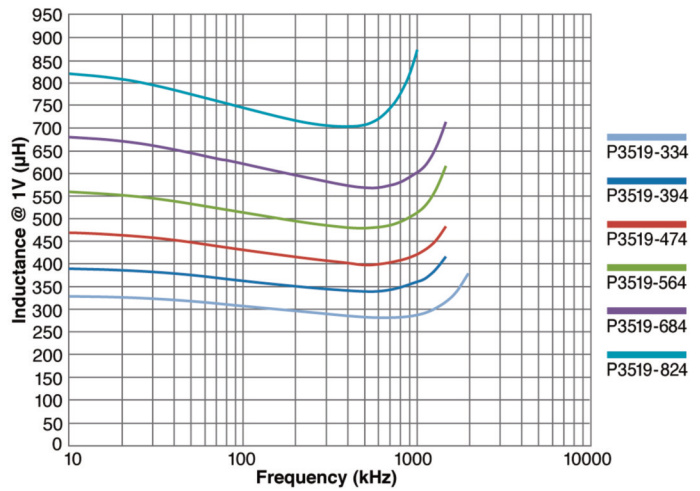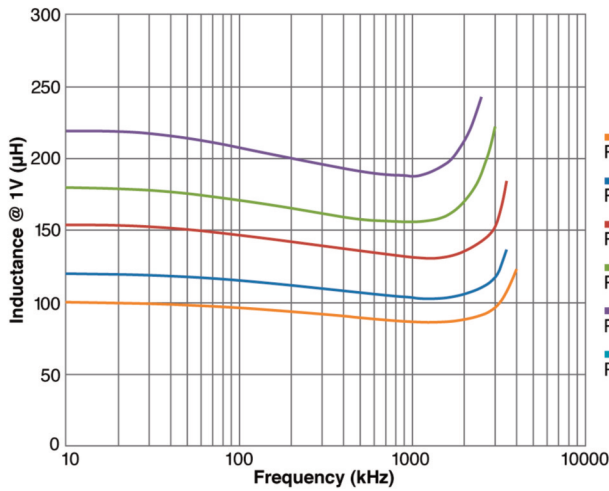

The above waveforms have been composed from data taken from a Wayne Kerr 3260B Precision Magnetics Analyzer and Hewlett Packard 4191A RF Impedance Analyzer.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[P3519R-562J](#) [P3519R-332J](#) [P3519R-821J](#) [P3519R-683J](#) [P3519R-274J](#) [P3519R-334J](#) [P3519R-151K](#) [P3519R-104J](#) [P3519R-471K](#) [P3519R-561K](#) [P3519R-391K](#) [P3519R-155J](#) [P3519R-394J](#) [P3519R-224J](#) [P3519R-393J](#) [P3519R-103J](#) [P3519R-473J](#) [P3519R-225J](#) [P3519R-182J](#) [P3519R-123J](#) [P3519R-154J](#) [P3519R-823J](#) [P3519R-185J](#) [P3519R-273J](#) [P3519R-474J](#) [P3519R-152J](#) [P3519R-121K](#) [P3519R-221K](#) [P3519R-682J](#) [P3519R-331K](#) [P3519R-223J](#) [P3519R-824J](#) [P3519R-271K](#) [P3519R-222J](#) [P3519R-124J](#) [P3519R-472J](#) [P3519R-564J](#) [P3519R-684J](#) [P3519R-181K](#) [P3519R-392J](#) [P3519R-125J](#) [P3519R-183J](#) [P3519R-333J](#) [P3519R-101K](#) [P3519R-102J](#) [P3519R-105J](#) [P3519R-153J](#) [P3519R-822J](#) [P3519R-122J](#) [P3519R-184J](#) [P3519R-272J](#) [P3519R-563J](#) [P3519R-681K](#)