


Series 4494R 4494

RoHS
CompliantTraditional
First Quality

Surface Mount Inductors

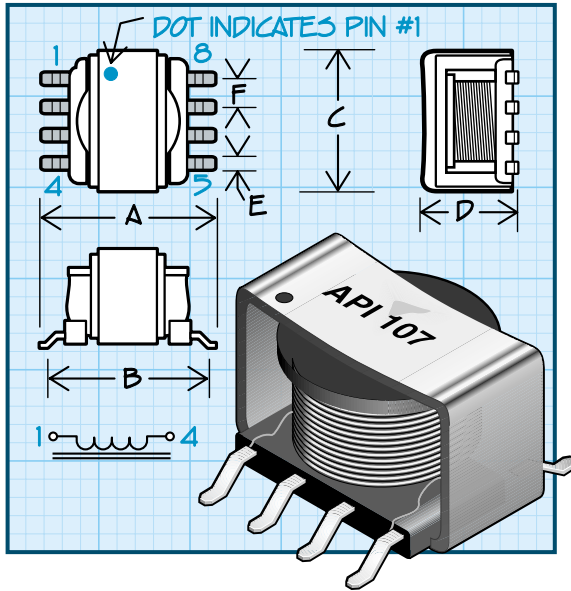

Physical Parameters

	Inches	Millimeters
A	0.435 to 0.465	11.05 to 11.81
B	0.385 to 0.405	9.78 to 10.29
C	0.375 to 0.405	9.53 to 10.29
D	0.205 to 0.235	5.21 to 5.97
E (8 places)	0.028 typ.	0.71 typ.
F (6 places)	0.079 typ.	2.00 typ.

Termination

Pin 1 = Finish; Pin 4 = Start; others, no connection

Operating Temperature Range -20°C to +80°C

Maximum Power Dissipation at 25°C 0.140 W

Incremental Current

Maximum DC Current which will cause less than a 25% decrease in inductance, from the zero DC current inductance.

Current Rating

Current which will cause less than a +35°C temperature rise maximum, from +25°C Ambient

Packaging Tape & reel (24mm): 13" reel, 600 pieces max.; 7" reel not available

Made In the U.S.A.

DASH NUMBER*

INDUCTANCE
(mH) $\pm 25\%$

Q Typical

TEST FREQUENCY (KHz)

SRF Typical (MHz)

DC RESISTANCE
MAXIMUM (OHMS)CURRENT RATING
MAXIMUM (AMPS)INCREMENTAL
CURRENT (AMPS)


SERIES 4494

-105	1.0	100	250	1.60	0.50	0.500	0.025
-125	1.2	100	250	1.50	0.57	0.480	0.024
-155	1.5	100	250	1.40	0.65	0.460	0.023
-185	1.8	100	250	1.30	0.70	0.420	0.022
-225	2.2	100	250	1.20	0.79	0.400	0.020
-275	2.7	100	250	1.00	1.25	0.330	0.018
-335	3.3	100	250	0.85	1.50	0.300	0.017
-395	3.9	100	250	0.75	1.70	0.280	0.016
-475	4.7	100	250	0.70	1.85	0.260	0.015
-565	5.6	100	250	0.65	2.60	0.220	0.013
-685	6.8	100	250	0.55	4.00	0.180	0.012
-825	8.2	100	250	0.50	4.50	0.170	0.011
-106	10.0	150	79	0.45	5.25	0.160	0.010
-126	12.0	150	79	0.40	5.75	0.150	0.009
-156	15.0	150	79	0.35	6.40	0.140	0.008
-186	18.0	150	79	0.30	9.25	0.120	0.007
-226	22.0	150	79	0.28	13.0	0.100	0.006
-276	27.0	150	79	0.26	14.5	0.095	0.006
-336	33.0	140	79	0.25	16.0	0.090	0.005
-396	39.0	140	79	0.22	18.0	0.085	0.005
-476	47.0	130	79	0.20	19.0	0.080	0.004
-566	56.0	130	79	0.19	27.0	0.070	0.003
-686	68.0	120	79	0.18	35.0	0.060	0.003
-826	82.0	120	79	0.16	43.0	0.055	0.002
-107	100.0	150	25	0.15	50.0	0.050	0.002

*Complete part # must include series # PLUS the dash #

For further surface finish information,
refer to TECHNICAL section of this catalog.

PAD DIMENSIONS

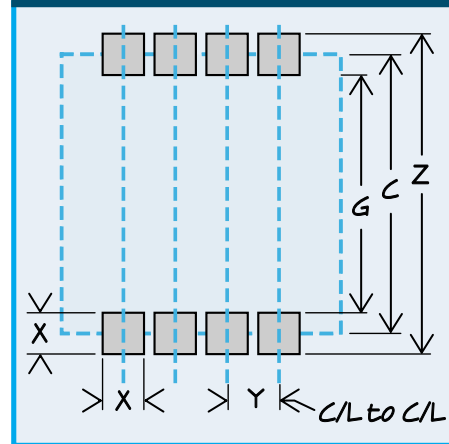

Pad Dimensions

	Inches	Millimeters
C	0.430	10.92
G	0.368	9.35
X	0.062	1.57
Y	0.079	2.01
Z	0.492	12.50

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[4494R-565](#) [4494-186](#) [4494-276](#) [4494-336](#) [4494R-395](#) [4494-106](#) [4494-105](#) [4494-226](#) [4494-396](#) [4494-335](#)
[4494R-825](#) [4494-565](#) [4494R-396](#) [4494-185](#) [4494-275](#) [4494-395](#) [4494-475](#) [4494-685](#) [4494R-155](#) [4494R-276](#)
[4494R-336](#) [4494-566](#) [4494-826](#) [4494R-826](#) [4494-476](#) [4494-686](#) [4494R-126](#) [4494R-186](#) [4494R-476](#) [4494-107](#)
[4494R-105](#) [4494R-125](#) [4494R-226](#) [4494-156](#) [4494R-185](#) [4494R-275](#) [4494R-106](#) [4494R-156](#) [4494-125](#) [4494-155](#)
[4494-225](#) [4494-825](#) [4494-126](#) [4494R-225](#) [4494R-335](#) [4494R-686](#) [4494R-566](#) [4494R-475](#) [4494R-685](#) [4494R-107](#)