
INNOVATOR IN ELECTRONICS

Product Search Data Sheet

TZW4Z010A001R00

In Production NRND RoHS REAC

Appearance & Shape

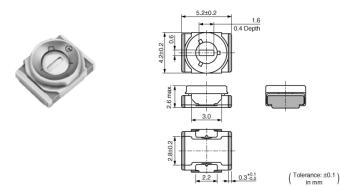

Features

Note: This datasheet may be out of date

Co., Ltd.

1. To meet high power application due to withstanding voltage $550\,\mathrm{Vdc}.$

Please download the latest datasheet of TZW4Z010A001R00 from the official website of Murata Manufacturing

https://www.murata.com/en-global/products/productdetail?partno=TZW4Z010A001R00

- 2. Extremely high self-resonant frequency. (More than 3GHz at rated C max.)
- 3. Typical application: Impedance matching for Cellular Base Station.
- 4. High Q value in more than VHF, UHF and Microwave bands. (More than 200 in 500MHz, C max.)
- 5. Available for pick and place machine. Possible thinner design due to 2.6mm low profile.
- 6. Non-electrical contact construction (rotor as middle electrode) provides high reliability.
- 7. Compact size: 4.2(W)x5.2(L)x2.6max.(H)mm.



Packaging Information

| Packaging | Specifications | Minimum Order Quantity |
|-----------|---------------------|---------------------------|
| R00 | 180mm Embossed Tape | 500 |

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Product Search Data Sheet

TZW4Z010A001R00

Specifications

| Shape | SMD | |
|-----------------------------|--------------------------|--|
| Operating Temperature Range | -55℃ to 125℃ | |
| Thickness | 2.6mm | |
| Thickness Tolerance | max. | |
| Rated Voltage | 250Vdc | |
| Cmin.(max.) | 0.4pF | |
| Cmax. | 1pF | |
| Cmax. Tolerance | +50/-0% | |
| Adjustment Direction | Тор | |
| тс | NP0±150ppm/°C | |
| Q | 200min. at 500MHz, Cmax. | |
| Withstanding Voltage | 550Vdc | |
| Insulation Resistance(min.) | 10000ΜΩ | |
| Torque | 1.5 to 10.0mNm | |
| Mass | 0.15g | |

Note: This datasheet may be out of date

Please download the latest datasheet of TZW4Z010A001R00 from the official website of Murata Manufacturing

Co., Ltd. https://www.murata.com/en-global/products/productdetail?partno=TZW4Z010A001R00

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

2 of 3

Product Search Data Sheet




TZW4Z010A001R00


Note: This datasheet may be out of date.

Please download the latest datasheet of TZW4Z010A001R00 from the official website of Murata Manufacturing Co. Ltd

<u>Co., Ltd.</u> https://www.murata.com/en-global/products/productdetail?partno=TZW4Z010A001R00



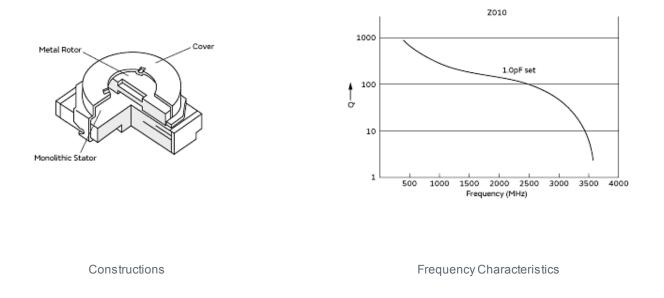

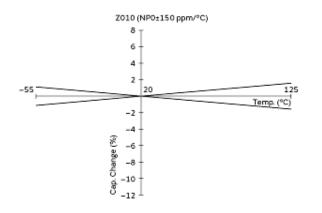

Temp. Coeff. Characteristics

3 of 3

Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata: TZW4Z010A001R00