



FEATURES

- Low Cost
- Multiple Package Styles
- Internal Input and Output
- Filtering
- Non-Conductive Case
- High Output Power Density: 10 Watts/Inch³
- Extended Temperature Range: -25°C to +85°C
- Efficiency to 79%
- RoHS Compliant

The HPR1XXWC Series uses advanced circuit design and packaging technology to deliver superior reliability and performance. A 170kHz push-pull oscillator is used in the input stage. Beat-frequency oscillation problems are reduced when using the HPR1XXWC Series with high frequency isolation amplifiers.

Reduced parts count and high efficiency add to the reliability of the HPR1XXWC Series. The high efficiency of the HPR1XXWC Series means less internal power dissipation, as low as 190mW.

With reduced heat dissipation the HPR1XXWC Series can operate at higher temperatures with no degradation. In addition, the high efficiency of the HPR1XXWC Series means the series is able to offer greater than 10 W/Inch³ of output power density. Operation down to no load will not impact the reliability of the series, although a >1mA minimum load is needed to realize published specifications.

The HPR1XXWC Series provides the user a low cost converter without sacrificing reliability. The use of surface mounted devices and advanced manufacturing technologies make it possible to offer premium performance and low cost.

All specifications are typical at TA = +25°C nominal input voltage unless otherwise specified.

PRODUCT SELECTION CHART

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED RIPPLE CURRENT (mAp-p)	EFFICIENCY (%)
				NO LOAD (mA)	RATED LOAD (mA)		
HPR100WC	5	5	150	20	216	10	69
-HPR101WC	5	12	62	20	212	5	70
-HPR102WC	5	15	50	20	212	5	71
-HPR103WC	5	±5	±75	20	218	5	68
-HPR104WC	5	±12	±30	20	212	5	68
HPR105WC	5	±15	±25	20	200	5	75
-HPR106WC	12	5	150	10	90	5	69
-HPR107WC	12	12	62	10	81	5	77
-HPR108WC	12	15	50	10	81	5	77
HPR109WC	12	±5	±75	10	88	5	71
-HPR110WC	12	±12	±30	10	81	5	74
-HPR111WC	12	±15	±25	10	81	5	77
-HPR112WC	15	5	150	8	72	5	69
-HPR113WC	15	12	62	8	72	5	69
-HPR114WC	15	15	50	8	72	5	69
-HPR115WC	15	±5	±75	8	72	5	69
-HPR116WC	15	±12	±30	8	63	5	76
-HPR117WC	15	±15	±25	8	63	5	79
-HPR118WC	24	5	150	8	48	15	65
-HPR119WC	24	12	62	8	48	15	65
-HPR120WC	24	15	50	8	45	15	76
-HPR121WC	24	±5	±75	8	45	15	69
-HPR122WC	24	±12	±30	8	45	15	67
-HPR123WC	24	±15	±25	8	45	15	69

Note: Other input to output voltages may be available. Please contact Murata Power Solutions.



For full details go to
www.murata-ps.com/rohs

SPECIFICATIONS, ALL MODELS

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage unless otherwise specified.









	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
OUTPUT	INPUT					
	Voltage Range		4.5	5	5.5	VDC
			10.8	12	13.2	VDC
			13.5	15	16.5	VDC
			21.6	24	26.4	VDC
	Voltage Rise Time See Typical Performance Curves & Application Notes: "Capacitive Loading Effects on Start-Up of DC/DC Converters"					
	OUTPUT					
	Rated Power				750	mW
	Voltage Setpoint Accuracy	Rated Load, Nominal V_{IN}			± 5	%
	Ripple & Noise	BW = DC to 10MHz		150	200	mVp-p
GENERAL		BW = 10Hz to 2MHz		30	40	mVrms
	Voltage (Over Input Voltage Range)	1mA to Rated Current, $V_{OUT} = 5\text{V}$	4.75		7	VDC
		1mA to Rated Current, $V_{OUT} = 12\text{V}$	11.40		15	VDC
		1mA to Rated Current, $V_{OUT} = 15\text{V}$	14.25		18	VDC
	Temperature Coefficient			.01	.05	%/°C
	REGULATION					
	Load Regulation (All other modes)	Rated Load to 1mA Load		3		%
	GENERAL					
	ISOLATION					
	Rated Voltage		750			VDC
	Test Voltage	60 Hz, 10 Seconds	750			Vrms
	Resistance		10			GΩ
	Capacitance			25	100	pF
	Leakage Current	$V_{ISO} = 240\text{VAC}$, 60Hz		2	8.5	μArms
	Switching Frequency			170		kHz
	Frequency Change	Over Line and Load		24		%
	Package Weight				3	g
	MTTF per MIL-HDBK-217, Rev. F*	Circuit Stress Method				
	Ground Benign	$T_A = +25^\circ\text{C}$	7.9			MHr
	Fixed Ground	$T_A = +35^\circ\text{C}$	1.9			MHr
	Naval Sheltered	$T_A = +35^\circ\text{C}$	1.2			MHr
	Airborne Uninhabited Fighter	$T_A = +35^\circ\text{C}$	300			kHr
	Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-20		2		
	TEMPERATURE					
	Specification		-25	+25	+85	°C
	Operation		-40		+100	°C
	Storage		-40		+110	°C

SOLDERING INFORMATION




The surface mount versions of the HPR1XXWC series are designed for SMT reflow soldering. During this standard process devices should be heated at a rate not to exceed 3 degrees C per second. The peak reflow temperature is 260 degrees C. The device should not be exposed to the peak temperature ± 10 degrees C for more than 12 seconds. The cool down rate for this device should not exceed 3 degrees C per second.

TYPICAL PERFORMANCE CURVES

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage and nominal load.

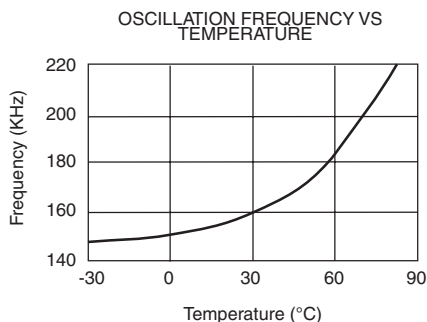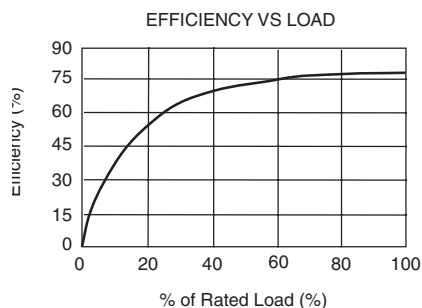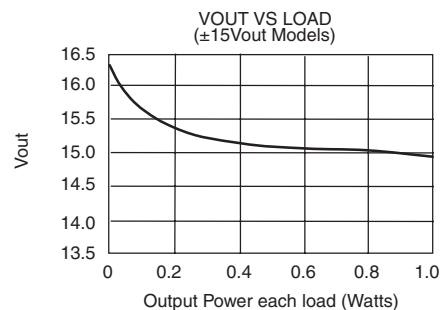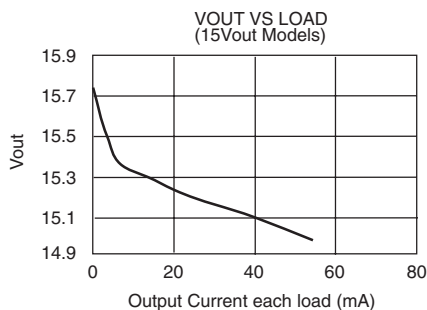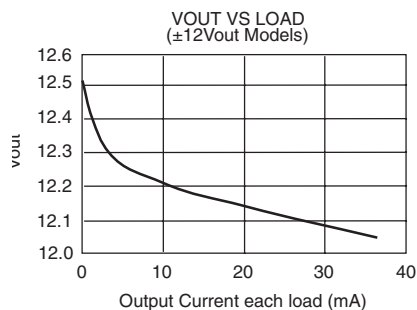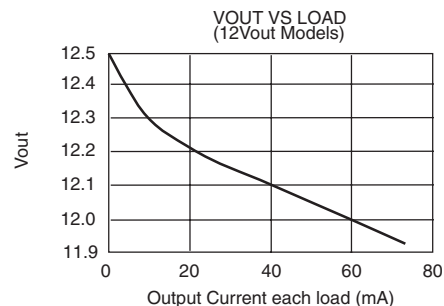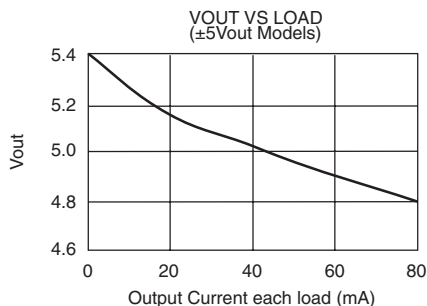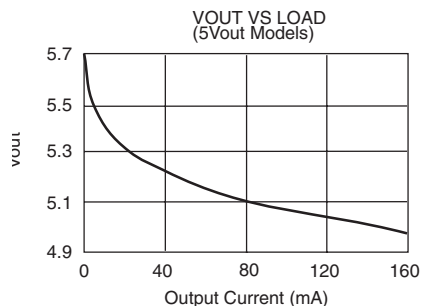

SAFE OPERATING AREA

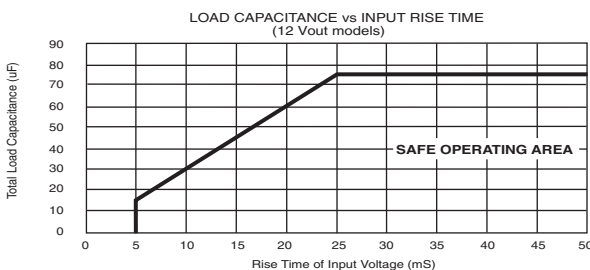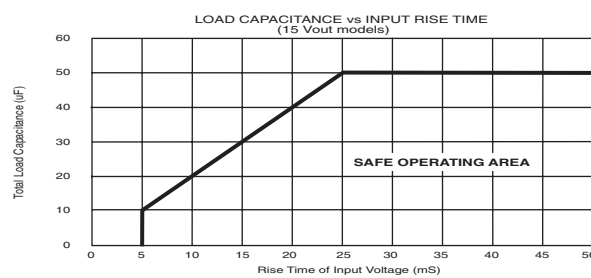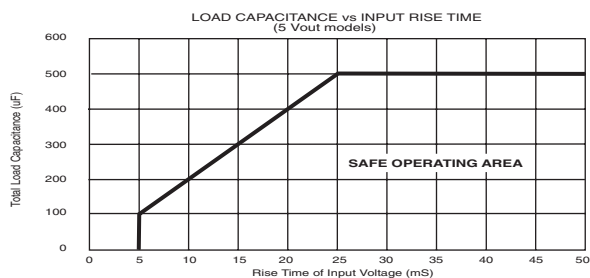


NOTES:

- 1.) When operated within the SAFE OPERATING AREA as defined by the above curves, the output voltage of HPR1XXC devices is guaranteed to be within 95% of its steady-state value within 100 milliseconds after the input voltage has reached 95% of its steady-state value.
- 2.) For dual output models, total load capacitance is the sum of the capacitances on the plus and minus outputs.

MECHANICAL

PACKAGE/PINOUT "W"

SMD PACKAGE

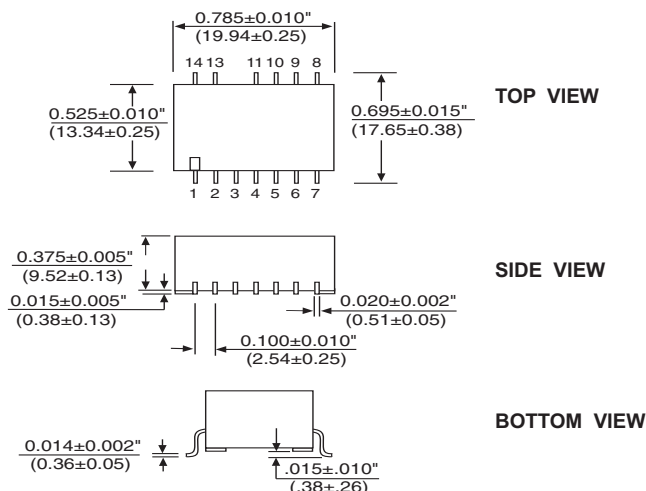

PIN CONNECTIONS

PIN#	SINGLES	DUALS	PIN#	SINGLES	DUALS
1	+VIN	+VIN	7	+VOUT	+VOUT
2	-VIN	-VIN	8	NC	NC
3	NC	NC	9	NC	NC
4	NC	NC	10	NC	NC
5	-VOUT	-VOUT	11	NC	NC
6	NC	Common	13	NC	NC
			14	NC	NC

NOTES:

NC = Do Not Connect.

Duplicate pin functions are internally connected.

All dimensions are in inches (millimeters).

GRID: 0.100 inches (2.54 millimeters)

MATERIAL: Lead material is phosphor bronze; lead finish is 100-300 microinches of matte tin over a nickel barrier layer of 5-40 microinches.

ABSOLUTE MAXIMUM RATINGS

Internal Power Dissipation 450mW
Short Circuit Duration..... Momentary

ORDERING INFORMATION

Device Family **HPR** **1XX** **W** **C**
 HPR Indicates DC/DC Converter
 Model Number
 Selected from Table of Electrical Characteristics
 Package Option
 W = SMD Package
 RoHS Compliant Version

Murata Power Solutions, Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: **sales@murata-ps.com** ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2008 Murata Power Solutions, Inc.

05/09/08

USA: Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com

Canada: Toronto, Tel: (866) 740-1232, email: toronto@murata-ps.com

UK: Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com

France: Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com

Germany: München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com

Japan: Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com

Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com

Website: **www.murata-ps.jp**

China: Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com

Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

[HPR100](#) [HPR101](#) [HPR102](#) [HPR106](#) [HPR107](#) [HPR108](#) [HPR112](#) [HPR113](#) [HPR114](#) [HPR118](#) [HPR119](#) [HPR120](#)
[HPR103](#) [HPR104](#) [HPR105](#) [HPR109](#) [HPR110](#) [HPR111](#) [HPR115](#) [HPR116](#) [HPR117](#) [HPR121](#) [HPR122](#) [HPR123](#)
[HPR100W](#) [HPR101W](#) [HPR102W](#) [HPR106W](#) [HPR107W](#) [HPR108W](#) [HPR112W](#) [HPR113W](#) [HPR114W](#) [HPR118W](#)
[HPR119W](#) [HPR120W](#) [HPR103W](#) [HPR104W](#) [HPR105W](#) [HPR109W](#) [HPR110W](#) [HPR111W](#) [HPR115W](#) [HPR116W](#)
[HPR117W](#) [HPR121W](#) [HPR122W](#) [HPR123W](#) [HPR106WC](#) [HPR110WC](#) [HPR118WC](#) [HPR102WC](#) [HPR114WC](#)
[HPR108WC](#) [HPR112WC](#) [HPR100WC](#) [HPR104WC](#) [HPR116WC](#) [HPR103WC](#) [HPR115WC](#) [HPR119WC](#)
[HPR111WC](#) [HPR107WC](#) [HPR105WC](#) [HPR117WC](#) [HPR113WC](#) [HPR101WC](#) [HPR109WC](#) [HPR122WC](#)
[HPR120WC](#) [HPR123WC](#) [HPR121WC](#)