



## NBNC75BUU11X

The rearTWIST UHD BNC connectors are specifically designed for high resolution video signal transmissions. Due to the unique insulator and contact pin design, the connectors feature low return loss values for 4K and 8K signals.

## Features & Benefits

- ✓ Optimized contact pin and insulator design for UHD-data transmissions
- ✓ Proven rearTWIST technology
- ✓ Swiss antraloy plating
- ✓ Fully compatible with conventional BNC chassis connectors
- ✓ Improved return loss values at high frequencies




- ① Screen and cable jacket crimp instead of screen crimp only. Grooved inner surface holds the cable jacket to prevent tearing braids.
- ② High frequency optimized insulator design for UHD-transmissions.
- ③ Reduced pin diameter for performance improvement (return loss values).
- ④ Swiss antraloy plating
- ⑤ rearTWIST boot for easy access in high density applications.

## Optimized Return Loss

Due to optimized insulator design and reduced crimp diameter from center pin the Neutrik rearTWIST UHD BNC connector achieves increased headroom compared to conventional

BNC connectors and offers additional return loss reserve for potential impedance deviations resulting from cable bending, incorrect connector assembly or faulty connection interfaces without signal interruption. For more details see Neutrik UHD BNC White Paper.

### Neutrik's UHD BNC chassis connector

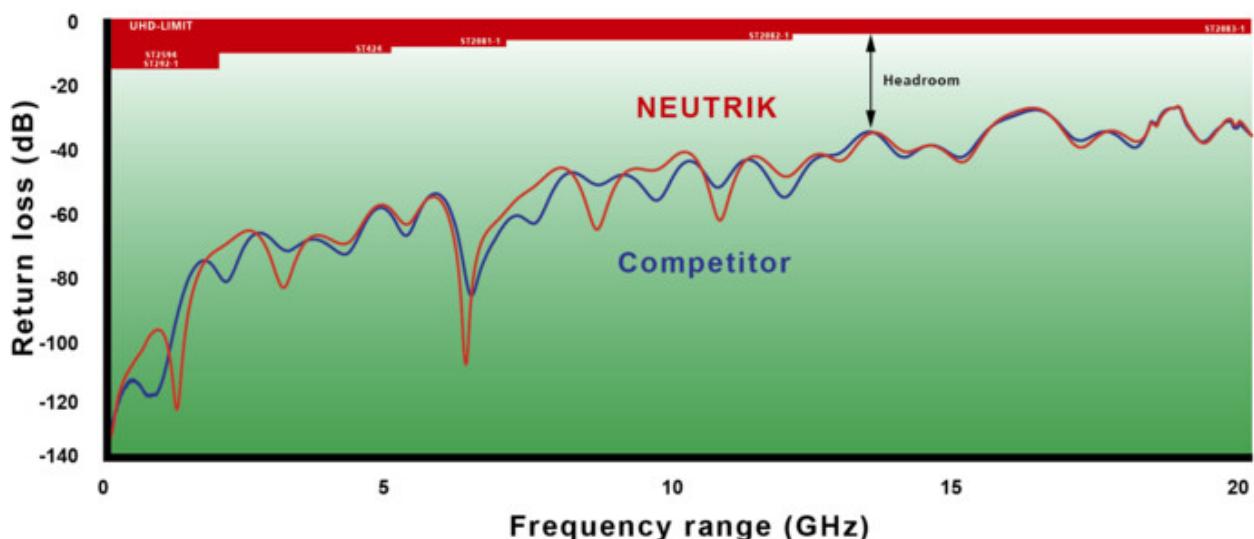

### Crimp Dimensions

In order to achieve optimum return loss values at high frequencies the crimp dimension of the contact pin has been reduced.

Pin:	1.07 mm
Shield:	7.36 mm
Crimp die:	DIE-R-BNCX-PU

### Approved Cables

To guarantee high performance for each cable-connector combination at high frequencies Neutrik measured common COAX cables which are specifically designed for ultra high definition transmission (UHD). Find all approved cables listed below.

#### Suitable cables:

Cordial CVI 10-48 HD, Draka 1.0/4.8 AF, Draka 755-901/5, Percon VK7

UHD optimized cables:

Argosy Image 1000, Klotz V10/48, Klotz V10/48H, TMB-ProPlex RG6

## Technical Information

Product	
Title	NBNC75BUU11X
Connection Type	BNC 75 Ω
Gender	male
Electrical	
Contact resistance	≤ 3 mΩ (inner)
Contact resistance	≤ 2 mΩ (outer)
Dielectric strength	1.5 kVdc
Impedance	75 Ω
Insulation resistance	> 5 GΩ
Rated voltage	< 50 V
VSWR	≤1.06 / >30 dB up to 6 GHz ≤1.13 / >24 dB up to 12 GHz ≤1.22 / >20 dB up to 18 Ghz

<b>Mechanical</b>	
<b>Cable O.D.</b>	7.3 mm
<b>Cable retention</b>	> 30 N (center)
<b>Crimp size</b>	7.36 Hex crimp (shield)
<b>Crimp size (pin)</b>	1.6
<b>Insertion force</b>	< 25 N
<b>Lifetime</b>	> 1000 mating cycles
<b>Wiresize</b>	
<b>Locking device</b>	Bayonett
<b>Cable anchoring</b>	Jacket crimping
<b>Material</b>	
<b>Contacts</b>	Brass (CuZn35Pb2), 0.2 µm AuCo
<b>Shell</b>	Brass (CuZn39Pb3)
<b>Shell plating</b>	Antraloy
<b>Insert</b>	PP
<b>Environmental</b>	
<b>Temperature range</b>	- 30 °C to +85 °C
<b>Contact crimpability</b>	Complies with IEC 60803 and IEC 60352-2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Neutrik](#):

[NBNC75BUU11X-D](#)