




Chip Type, Higher Capacitance Range



- Chip Type, higher capacitance in larger case sizes ( $\phi 12.5$ ,  $\phi 16$ ,  $\phi 18$ )
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.




## Specifications

| Item                                                                                       | Performance Characteristics                                                                                                                                                                                                                                                                                                                                                                                    |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|------|------|--------------------|------|---------------------------------------------------|-----|----|----|----|----|----|-----|--------------|------------------------|---------------------|------|------|------|------|------|---------------------------------------|---|---------------------|----|---|---|---|---|---|---|------------------------------|
| Category Temperature Range                                                                 | -40 to +85°C                                                                                                                                                                                                                                                                                                                                                                                                   |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Rated Voltage Range                                                                        | 10 to 100V                                                                                                                                                                                                                                                                                                                                                                                                     |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Rated Capacitance Range                                                                    | 68 to 10000μF                                                                                                                                                                                                                                                                                                                                                                                                  |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Capacitance Tolerance                                                                      | ±20% at 120Hz, 20°C                                                                                                                                                                                                                                                                                                                                                                                            |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Leakage Current ※                                                                          | After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV(μA).                                                                                                                                                                                                                                                                                                            |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Tangent of loss angle (tan δ)                                                              | <table><tr><td>Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>tan δ (max.)</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.08</td></tr></table>                                                                                                                                                      |                     |      |      |      |                    |      | Rated voltage (V)                                 | 10  | 16 | 25 | 35 | 50 | 63 | 100 | tan δ (max.) | 0.24                   | 0.20                | 0.16 | 0.14 | 0.12 | 0.10 | 0.08 | Measurement frequency : 120Hz at 20°C |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            | Rated voltage (V)                                                                                                                                                                                                                                                                                                                                                                                              | 10                  | 16   | 25   | 35   | 50                 | 63   | 100                                               |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            | tan δ (max.)                                                                                                                                                                                                                                                                                                                                                                                                   | 0.24                | 0.20 | 0.16 | 0.14 | 0.12               | 0.10 | 0.08                                              |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. (φ12.5 to φ18) |                                                                                                                                                                                                                                                                                                                                                                                                                |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Stability at Low Temperature                                                               | <table><tr><td colspan="2">Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td rowspan="2">Impedance ratio (max.)</td><td>Z(-25°C) / Z(+20°C)</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40°C) / Z(+20°C)</td><td>10</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td></tr></table> |                     |      |      |      |                    |      | Rated voltage (V)                                 |     | 10 | 16 | 25 | 35 | 50 | 63  | 100          | Impedance ratio (max.) | Z(-25°C) / Z(+20°C) | 4    | 3    | 2    | 2    | 2    | 2                                     | 2 | Z(-40°C) / Z(+20°C) | 10 | 8 | 5 | 4 | 3 | 3 | 3 | Measurement frequency: 120Hz |
|                                                                                            | Rated voltage (V)                                                                                                                                                                                                                                                                                                                                                                                              |                     | 10   | 16   | 25   | 35                 | 50   | 63                                                | 100 |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            | Impedance ratio (max.)                                                                                                                                                                                                                                                                                                                                                                                         | Z(-25°C) / Z(+20°C) | 4    | 3    | 2    | 2                  | 2    | 2                                                 | 2   |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Z(-40°C) / Z(+20°C)                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                | 10                  | 8    | 5    | 4    | 3                  | 3    | 3                                                 |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Endurance                                                                                  | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.                                                                                                                                                                                                                                                            |                     |      |      |      | Capacitance change |      | Within ±20% of the initial capacitance value      |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                |                     |      |      |      | tan δ              |      | 200% or less than the initial specified value     |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
|                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                |                     |      |      |      | Leakage current    |      | Less than or equal to the initial specified value |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Shelf Life                                                                                 | After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.                                                                                                                                                                         |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |
| Marking                                                                                    | Black print on the case top.                                                                                                                                                                                                                                                                                                                                                                                   |                     |      |      |      |                    |      |                                                   |     |    |    |    |    |    |     |              |                        |                     |      |      |      |      |      |                                       |   |                     |    |   |   |   |   |   |   |                              |

※ I : Leakage Current ( $\mu$ A), C : Rated Capacitance ( $\mu$ F), V : Rated Voltage (V)

## Chip Type

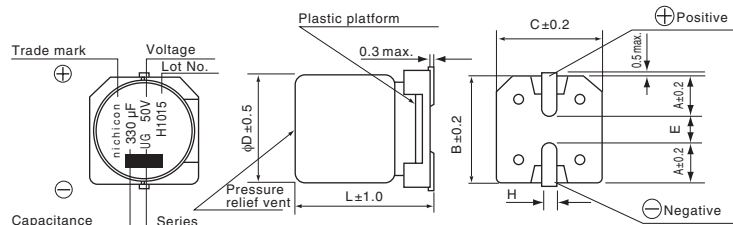


(mm)

| $\phi D$ | 12.5×13.5  | 12.5×16    | 12.5×21    | 16×16.5    | 16×21.5    | 18×16.5    | 18×21.5    |
|----------|------------|------------|------------|------------|------------|------------|------------|
| A        | 5.15       | 5.15       | 5.15       | 5.65       | 5.65       | 6.65       | 6.65       |
| B        | 13.6       | 13.6       | 13.6       | 17.1       | 17.1       | 19.1       | 19.1       |
| C        | 13.6       | 13.6       | 13.6       | 17.1       | 17.1       | 19.1       | 19.1       |
| E        | (3.3)      | (3.3)      | (3.3)      | (5.8)      | (5.8)      | (5.8)      | (5.8)      |
| L        | 13.5       | 16.0       | 21.0       | 16.5       | 21.5       | 16.5       | 21.5       |
| H        | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 |

Please contact us for the dimensions for NQ.

Type numbering system (Example : 50V 330 $\mu$ F)

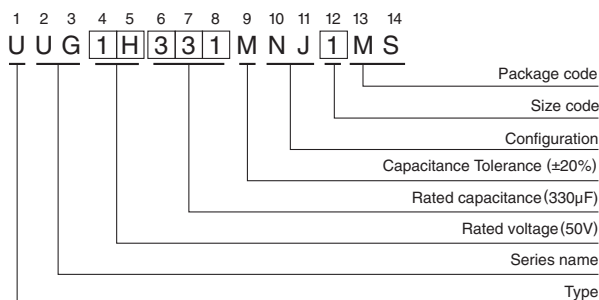

※ There are also some products that can be manufactured as vibration resistant products.

## Frequency coefficient of rated ripple current

| Cap. ( $\mu$ F) | Frequency | 50Hz | 120Hz | 300Hz | 1kHz | 10kHz or more |
|-----------------|-----------|------|-------|-------|------|---------------|
| 68              |           | 0.75 | 1.00  | 1.35  | 1.57 | 2.00          |
| 100 to 470      |           | 0.80 | 1.00  | 1.23  | 1.34 | 1.50          |
| 1000 to 10000   |           | 0.85 | 1.00  | 1.10  | 1.13 | 1.15          |

● Dimension table in next page.

UUG

## ■ Dimensions

| Rated Voltage<br>(V)<br>(code) | Rated Capacitance<br>( $\mu$ F) | Case Size<br>$\phi$ D $\times$ L (mm) | $\tan \delta$ | Leakage Current<br>( $\mu$ A)<br>(at 20°C after<br>1 minute) | Rated Ripple<br>(mArms)<br>(85°C/120Hz) | Part Number     |
|--------------------------------|---------------------------------|---------------------------------------|---------------|--------------------------------------------------------------|-----------------------------------------|-----------------|
| 10<br>(1A)                     | 1000                            | 12.5 $\times$ 13.5                    | 0.24          | 300                                                          | 620                                     | UUG1A102M NJ1MS |
|                                | 2200                            | 12.5 $\times$ 16                      | 0.26          | 660                                                          | 960                                     | UUG1A222M NJ1MS |
|                                | 3300                            | 16 $\times$ 16.5                      | 0.28          | 990                                                          | 1300                                    | UUG1A332M NJ1MS |
|                                | 4700                            | 18 $\times$ 16.5                      | 0.30          | 1410                                                         | 1500                                    | UUG1A472M NJ1MS |
|                                | 4700                            | 16 $\times$ 21.5                      | 0.30          | 1410                                                         | 1500                                    | UUG1A472M NJ6MS |
|                                | 6800                            | 18 $\times$ 21.5                      | 0.34          | 2040                                                         | 1850                                    | UUG1A682M NJ1MS |
|                                | 10000                           | 18 $\times$ 21.5                      | 0.42          | 3000                                                         | 2200                                    | UUG1A103M NJ6MS |
| 16<br>(1C)                     | 1000                            | 12.5 $\times$ 13.5                    | 0.20          | 480                                                          | 710                                     | UUG1C102M NJ1MS |
|                                | 2200                            | 16 $\times$ 16.5                      | 0.22          | 1056                                                         | 1150                                    | UUG1C222M NJ1MS |
|                                | 2200                            | 12.5 $\times$ 21                      | 0.22          | 1056                                                         | 1150                                    | UUG1C222M NJ6MS |
|                                | 3300                            | 18 $\times$ 16.5                      | 0.24          | 1584                                                         | 1450                                    | UUG1C332M NJ1MS |
|                                | 3300                            | 16 $\times$ 21.5                      | 0.24          | 1584                                                         | 1450                                    | UUG1C332M NJ6MS |
|                                | 4700                            | 18 $\times$ 21.5                      | 0.26          | 2256                                                         | 1750                                    | UUG1C472M NJ1MS |
|                                | 4700                            | 16 $\times$ 21.5                      | 0.26          | 2256                                                         | 1750                                    | UUG1C472M NJ6MS |
| 25<br>(1E)                     | 470                             | 12.5 $\times$ 13.5                    | 0.16          | 352.5                                                        | 550                                     | UUG1E471M NJ1MS |
|                                | 1000                            | 12.5 $\times$ 16                      | 0.16          | 750                                                          | 820                                     | UUG1E102M NJ1MS |
|                                | 2200                            | 18 $\times$ 16.5                      | 0.18          | 1650                                                         | 1350                                    | UUG1E222M NJ1MS |
|                                | 2200                            | 16 $\times$ 21.5                      | 0.18          | 1650                                                         | 1350                                    | UUG1E222M NJ6MS |
|                                | 3300                            | 18 $\times$ 21.5                      | 0.20          | 2475                                                         | 1700                                    | UUG1E332M NJ1MS |
| 35<br>(1V)                     | 470                             | 12.5 $\times$ 13.5                    | 0.14          | 493.5                                                        | 580                                     | UUG1V471M NJ1MS |
|                                | 1000                            | 16 $\times$ 16.5                      | 0.14          | 1050                                                         | 1000                                    | UUG1V102M NJ1MS |
|                                | 1000                            | 12.5 $\times$ 21                      | 0.14          | 1050                                                         | 1000                                    | UUG1V102M NJ6MS |
|                                | 2200                            | 18 $\times$ 21.5                      | 0.16          | 2310                                                         | 1550                                    | UUG1V222M NJ1MS |
| 50<br>(1H)                     | 220                             | 12.5 $\times$ 13.5                    | 0.12          | 330                                                          | 450                                     | UUG1H221M NJ1MS |
|                                | 330                             | 12.5 $\times$ 13.5                    | 0.12          | 495                                                          | 520                                     | UUG1H331M NJ1MS |
|                                | 470                             | 16 $\times$ 16.5                      | 0.12          | 705                                                          | 740                                     | UUG1H471M NJ1MS |
|                                | 470                             | 12.5 $\times$ 21                      | 0.12          | 705                                                          | 740                                     | UUG1H471M NJ6MS |
|                                | 1000                            | 18 $\times$ 21.5                      | 0.12          | 1500                                                         | 1150                                    | UUG1H102M NJ1MS |
| 63<br>(1J)                     | 100                             | 12.5 $\times$ 13.5                    | 0.10          | 189                                                          | 370                                     | UUG1J101M NJ1MS |
|                                | 220                             | 12.5 $\times$ 16                      | 0.10          | 415.8                                                        | 580                                     | UUG1J221M NJ1MS |
|                                | 330                             | 16 $\times$ 16.5                      | 0.10          | 623.7                                                        | 680                                     | UUG1J331M NJ1MS |
|                                | 330                             | 12.5 $\times$ 21                      | 0.10          | 623.7                                                        | 680                                     | UUG1J331M NJ6MS |
|                                | 470                             | 18 $\times$ 16.5                      | 0.10          | 888.3                                                        | 850                                     | UUG1J471M NJ1MS |
|                                | 470                             | 16 $\times$ 21.5                      | 0.10          | 888.3                                                        | 850                                     | UUG1J471M NJ6MS |
| 100<br>(2A)                    | 68                              | 12.5 $\times$ 13.5                    | 0.08          | 204                                                          | 350                                     | UUG2A680M NJ1MS |
|                                | 100                             | 12.5 $\times$ 16                      | 0.08          | 300                                                          | 440                                     | UUG2A101M NJ1MS |
|                                | 220                             | 18 $\times$ 16.5                      | 0.08          | 660                                                          | 665                                     | UUG2A221M NJ1MS |
|                                | 220                             | 16 $\times$ 21.5                      | 0.08          | 660                                                          | 665                                     | UUG2A221M NJ6MS |
|                                | 330                             | 18 $\times$ 21.5                      | 0.08          | 990                                                          | 825                                     | UUG2A331M NJ1MS |

• For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nichicon:](#)

|                                        |                                        |                                        |                                        |                                        |
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| <a href="#"><u>UUG1J471M NJ6MS</u></a> | <a href="#"><u>UUG2A331M NJ1MS</u></a> | <a href="#"><u>UUG1V222M NJ1MS</u></a> | <a href="#"><u>UUG1J221M NJ1MS</u></a> | <a href="#"><u>UUG1J471M NJ1MS</u></a> |
| <a href="#"><u>UUG1A103M NJ6MS</u></a> | <a href="#"><u>UUG1H471M NJ6MS</u></a> | <a href="#"><u>UUG1C332M NJ1MS</u></a> | <a href="#"><u>UUG1C332M NJ6MS</u></a> | <a href="#"><u>UUG1V102M NJ6MS</u></a> |
| <a href="#"><u>UUG2E220M NJ1MS</u></a> | <a href="#"><u>UUG1V102M NJ1MS</u></a> | <a href="#"><u>UUG1H221M NJ1MS</u></a> | <a href="#"><u>UUG1C102M NJ1MS</u></a> | <a href="#"><u>UUG1H331M NJ1MS</u></a> |
| <a href="#"><u>UUG1A682M NJ1MS</u></a> | <a href="#"><u>UUG1E102M NJ1MS</u></a> | <a href="#"><u>UUG1E222M NJ6MS</u></a> | <a href="#"><u>UUG1C222M NJ6MS</u></a> | <a href="#"><u>UUG1V471M NJ1MS</u></a> |
| <a href="#"><u>UUG1J101M NJ1MS</u></a> | <a href="#"><u>UUG1A222M NJ1MS</u></a> | <a href="#"><u>UUG1A102M NJ1MS</u></a> | <a href="#"><u>UUG1A332M NJ1MS</u></a> | <a href="#"><u>UUG1H471M NJ1MS</u></a> |
| <a href="#"><u>UUG1J331M NJ1MS</u></a> | <a href="#"><u>UUG2A221M NJ1MS</u></a> | <a href="#"><u>UUG2A221M NJ6MS</u></a> | <a href="#"><u>UUG1E222M NJ1MS</u></a> | <a href="#"><u>UUG1C222M NJ1MS</u></a> |
| <a href="#"><u>UUG1J331M NJ6MS</u></a> | <a href="#"><u>UUG1H102M NJ1MS</u></a> | <a href="#"><u>UUG1E332M NJ1MS</u></a> | <a href="#"><u>UUG1C472M NJ1MS</u></a> | <a href="#"><u>UUG2A680M NJ1MS</u></a> |
| <a href="#"><u>UUG1E471M NJ1MS</u></a> | <a href="#"><u>UUG1A472M NJ6MS</u></a> | <a href="#"><u>UUG1A472M NJ1MS</u></a> | <a href="#"><u>UUG2A101M NJ1MS</u></a> |                                        |