
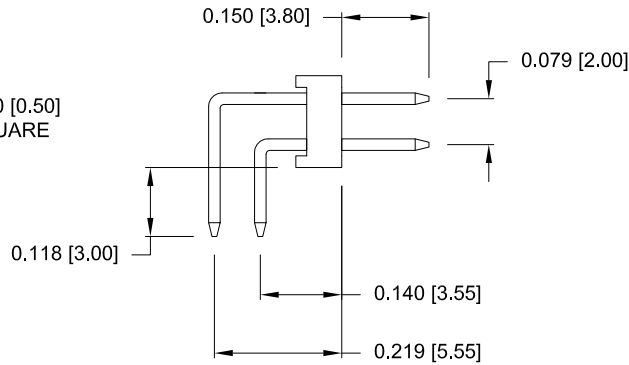


ELECTRICAL CHARACTERISTICS

VOLTAGE: 250 VAC (RMS) Max.
CURRENT RATING: 1 AMP
CONTACT RESISTANCE: 20 mΩ Max.
INSULATION RESISTANCE: 5000 MΩ Min.
DIELECTRIC WITHSTANDING: 500 VAC
OPERATING TEMPERATURE: -40°C TO +105°C
PROCESSING TEMPERATURE: 260°C FOR 10 SECONDS


MATERIAL CHARACTERISTICS

HOUSING: PA9T, UL94V-0, BLACK
CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH ENTIRE CONTACT

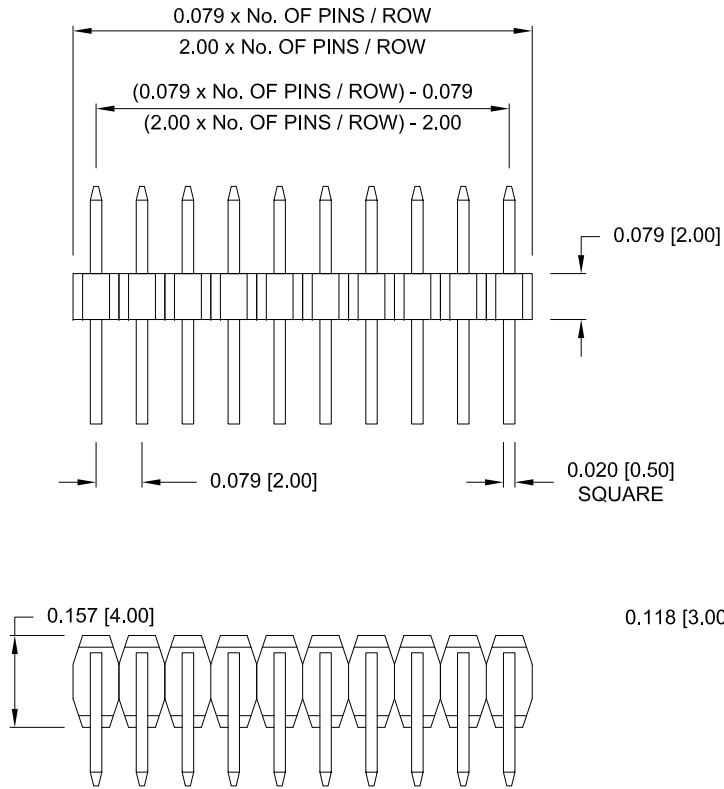

2764YY02RP2

SERIES _____
2764 = DUAL ROW
POSITIONS _____
DUAL-INCREMENTS OF 2
(02 TO 72)
TYPE _____
02 = RIGHT ANGLE
PLATING _____
P2 = GOLD FLASH

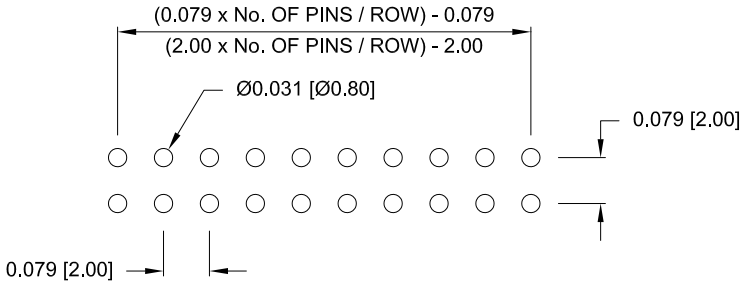

RECOMMENDED P.C. BOARD LAYOUT
(ALL TOLERANCES = ± 0.002)

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH
DATE:
07/16/2008

UNITS = inch [mm]

NorComp

DO NOT SCALE FROM DRAWING

SCALE: NTS
SHEET 1 OF 1
REV 4
DWG NO. 2764YY02RP2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[27641802RP2](#) [27646202RP2](#) [27647002RP2](#)