

No. OF PINS	DIMENSIONS <small>inch mm</small>				
	A	B	C	D MAX	E
9	0.780	1.350	0.395	0.228	0.338
	19.81	34.29	10.03	5.79	8.59
15	0.932	1.367	0.360	0.284	0.338
	23.67	34.72	9.14	7.21	8.59
25	1.195	1.373	0.390	0.331	0.390
	30.35	34.87	9.91	8.41	9.91

BACKSHELL KIT INCLUDES:

- 1 - BACKSHELL ⑤
- 1 - ALIGNMENT SLEEVE ①
- 1 - COVER ②
- 1 - INSULATOR (MATING END) ③
- 1 - INSULATOR (REAR END) ④
- 2 - 2-56 JACKSCREW ⑥

MATERIAL:

BACKSHELL: THERMOPLASTIC
 ALIGNMENT SLEEVE: STEEL, TIN PLATED
 COVER: STEEL, TIN PLATED
 INSULATOR (FRONT): THERMOPLASTIC
 INSULATOR (REAR): THERMOPLASTIC
 JACKSCREW: STEEL, NICKEL PLATED

MECHANICAL:

OPERATING TEMP: -10° C TO + 70° c
 MATING CYCLES: 300 CYCLES

MAXIMUM WIRE JACKET OD = 0.039"

960-YYY-010R01Y

1 = KIT
 2 = BULK

009 = 9 POSITION
 015 = 15 POSITION
 025 = 25 POSITION

NOTE:

****NOT DESIGNED TO MATE WITH NORCOMP 580-M // 581-M SERIES CONNECTORS. IF ANY QUESTIONS PLEASE CONTACT ENG@NORCOMP.NET**

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN:

M. SIGMON

DATE:

09-01-11

SCALE:

NTS

SHEET

OF

1

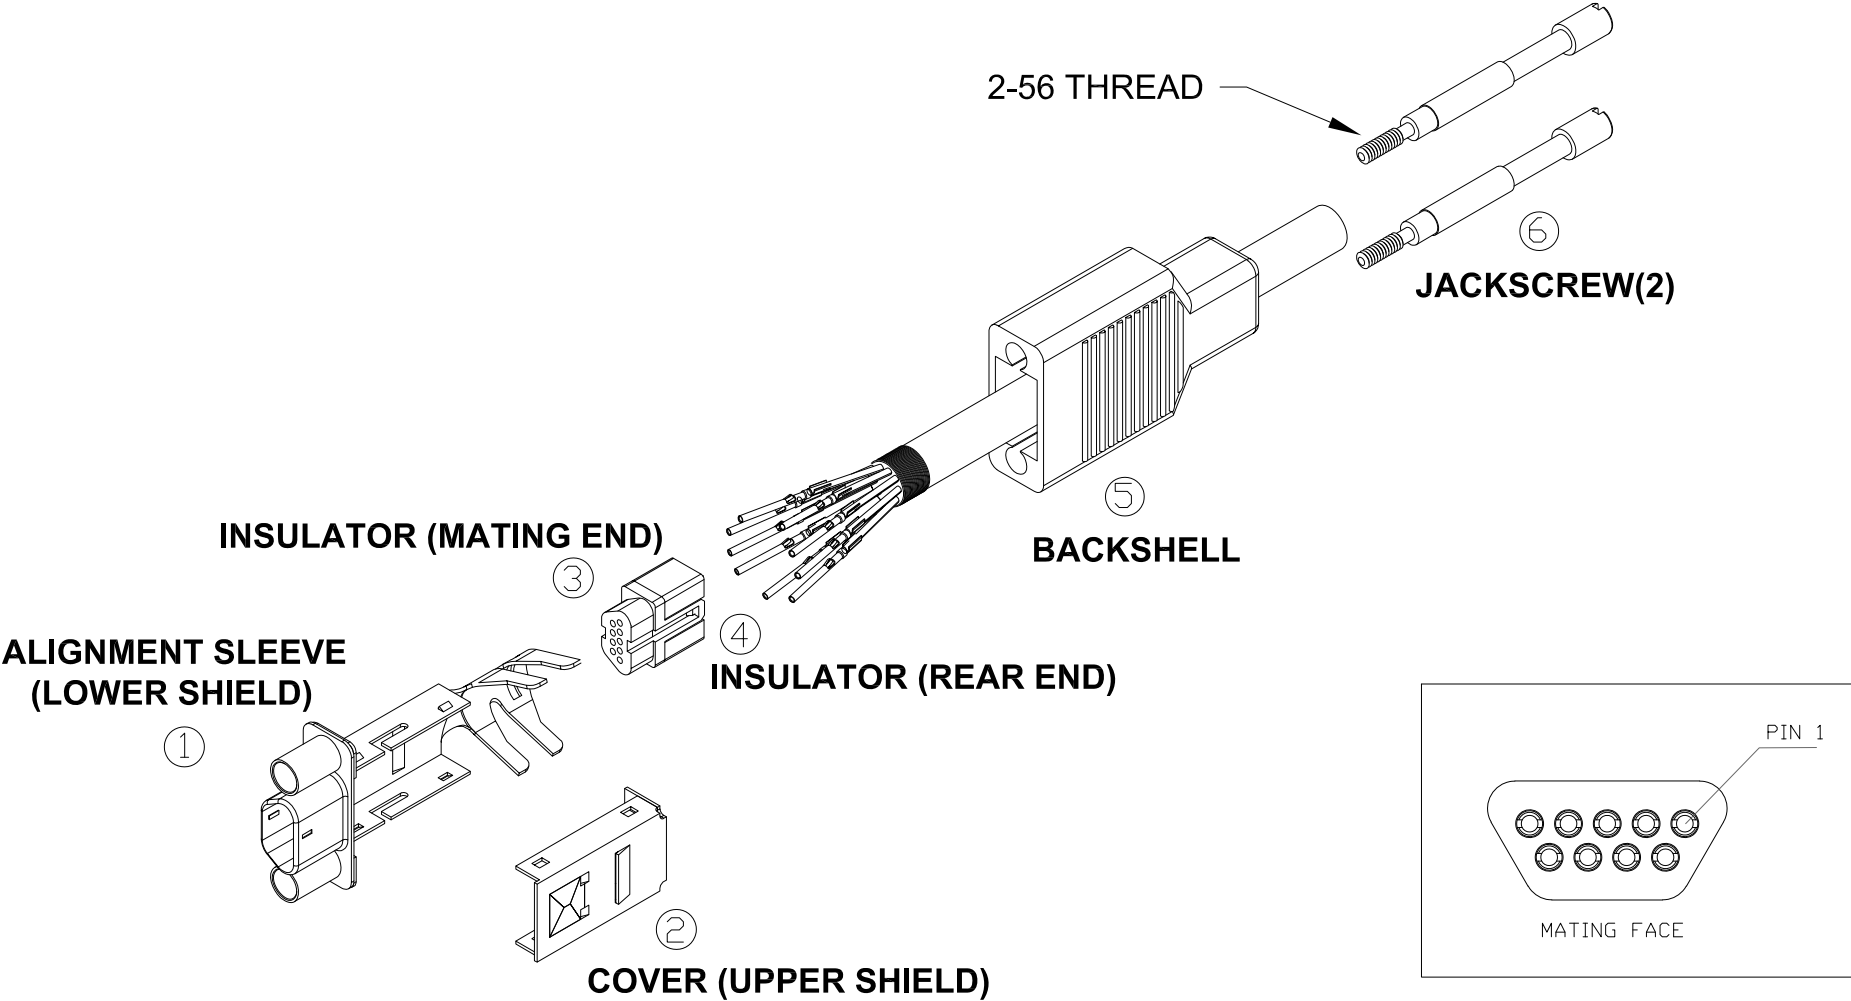
2

REV



6

DWG NO.

960-YYY-010R01Y



DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			DRAWN: M. SIGMON		DATE: 09-01-11	
				SCALE: NTS	SHEET 2	OF 2	REV 6
			DWG NO. 960-YYY-010R01Y				

RoHS COMPLIANT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

[960-009-010R011](#) [960-015-010R011](#) [960-025-010R011](#)