CRYSTAL OSCILLATOR TEST & BURN IN SOCKET




Precision test socket for 2.5X2mm, 4 pad crystal oscillator packages.




FEATURES:

- Accurate and reliable testing of frequency control devices
- Contact force ideal for avoiding measurement error
- Highest quality socket available
- Clam shell design for easy open and close
- Reliable gold plated POGO pins
- Suitable for high temperature burn-in test
- Operating Temperature: -30 ~ +150°C

SIDE VIEW (OPEN):

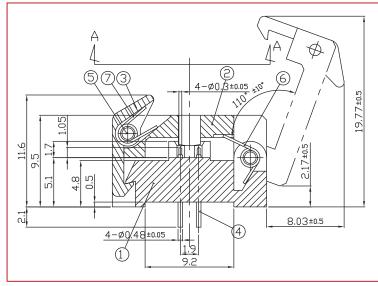

END VIEW:

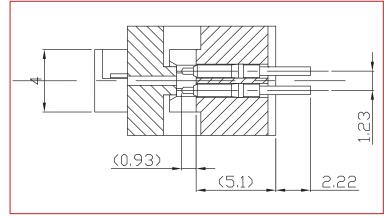

> ORDERING INFORMATION:

When ordering, please refer to part number

AXS-2520-04-07

RECOMMENED FOR USE WITH DEVICE PACKAGE DIMENSIONS:

2.5 x 2.0 x 0.82mm



ABRACON

APPLICATIONS:

Design stage component engineering evaluation


(Pb

RoHS


Compliant

- Supplier comparison tests
- High temperature burn-in board testing
- Prototyping


POCKET TOP VIEW:

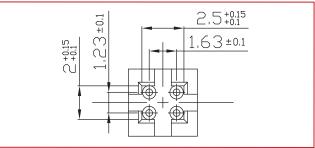

PIN DIMENSIONS:

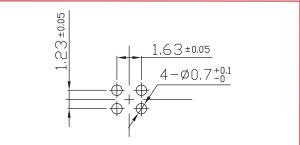

SUITABLE CRYSTAL OSCILLATOR PACKAGE DIMENSIONS:

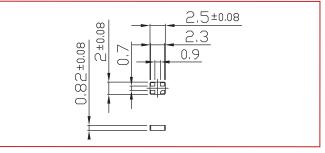

Dimensions: mm

COMPATIBLE ABRACON SURFACE MOUNT CRYSTAL OSCILLATOR:

ASDK, AP2S

(for a pdf download go to www.abracon.com/oscillators.htm)

* ABRACON test and burn in sockets are compatible with all industry standard frequency control packages.

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.10.09** 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON: AXS-2520-04-07