CRYSTAL TEST & BURN IN SOCKET

AXS-3225-04-12

Precision test socket for 3.2X2.5mm, 4 pad crystal packages.







> FEATURES:

- Accurate and reliable testing of frequency control devices
- Contact force ideal for avoiding measurement error
- Highest quality socket available
- Clam shell design for easy open and close
- Reliable gold plated POGO pins
- Suitable for high temperature burn-in test
- Operating Temperature: -30 ~ +150°C

SIDE VIEW (OPEN):

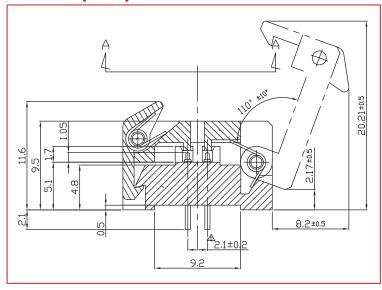

END VIEW:

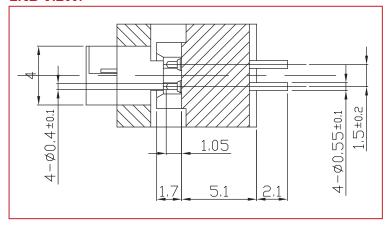

ORDERING INFORMATION:

When ordering, please refer to part number

AXS-3225-04-12

RECOMMENED FOR USE WITH DEVICE PACKAGE DIMENSIONS:


3.2 x 2.5 x 0.7mm

ABRACON


> APPLICATIONS:

- Design stage component engineering evaluation
- Supplier comparison tests
- High temperature burn-in board testing
- Prototyping


POCKET TOP VIEW:

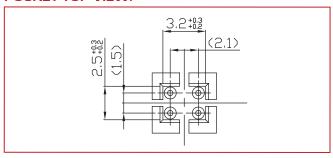

PIN DIMENSIONS:

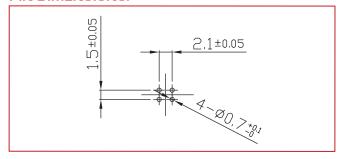

SUITABLE CRYSTAL PACKAGE DIMENSIONS:

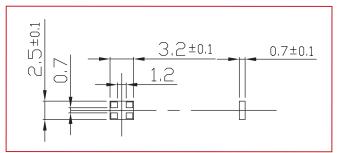

Dimensions: mm

COMPATIBLE ABRACON SURFACE MOUNT CRYSTAL:

ABM8

(for a pdf download go to www.abracon.com/oscillators.htm)

* ABRACON test and burn in sockets are compatible with all industry standard frequency control packages.

Visit www.abracon.com for Terms & Conditions of Sale Revised: 07.10.09
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

AXS-3225-04-12