

ACMS-Q4523F

Request Samples



Check Inventory (>)



4.5 x 3.2 x 2.3 mm **RoHS/RoHS II Compliant** MSL Level = 1

Features

- AEC-Q200 compliant, Grade 1
- PPAP ready and supported
- Manufactured in TS/IATF 16949 production lines
- Excellent impedance characteristics

Applications

- Differential signal line common mode noise suppression.
- Multimedia devices
- Automotive applications such as ADAS, Infotainment, Sensing, TCU
- Automotive CANFD

Electrical Specifications

Part Number	Inductance (μH) (+50%/-30%)	DCR (mΩ)	Rated Current (A)	Rated Voltage (Vdc)	Insulation Resistance $(M\Omega)$
		Max	Max	Max	Min
ACMS-Q4523F-101	100	2000	0.2	50	10

Rated Current is based on an Irms temperature rise of 20°C

Inductance Test Conditions: 0.1MHz/0.1V

ACMS-O4523F is AEC-O200 Automotive certified

ACMS-O4523F Series is RoHS Compliant and Pb free

Operating Temperature: -40°C to +150°C (Including self-heating)

Storage Temperature (on PCB): -40°C to +150°C Storage (in original packaging): <40°C, <70% RH





ACMS-Q4523F

Request Samples (>)




Check Inventory (>)



4.5 x 3.2 x 2.3 mm **RoHS/RoHS II Compliant** MSL Level = 1

Electrical Specifications

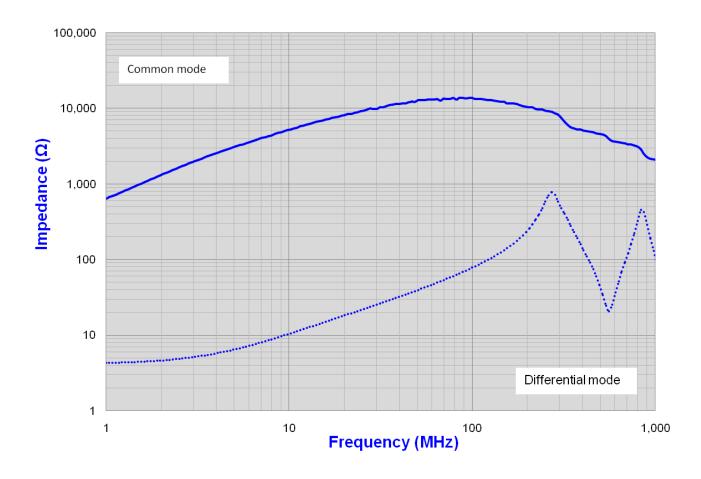





ACMS-Q4523F

Request Samples (>)





Check Inventory (>)




4.5 x 3.2 x 2.3 mm RoHS/RoHS II Compliant MSL Level = 1

Mechanical Specifications

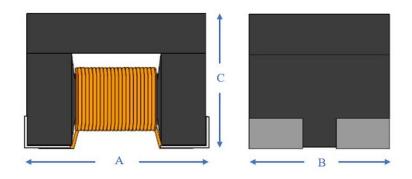

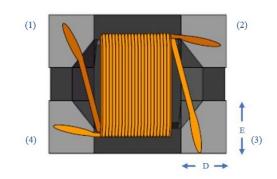

A	В	C	D	E
4.5 ± 0.2	3.2 ± 0.2	2.3 ± 0.2	1.0 ± 0.1	1.25 ± 0.1

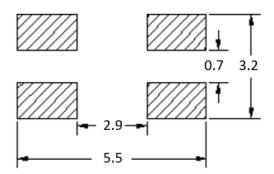

Recommended Layout

Dimensions: mm





ACMS-Q4523F

Request Samples (>)




Check Inventory (>)




4.5 x 3.2 x 2.3 mm **RoHS/RoHS II Compliant** MSL Level = 1

Schematic

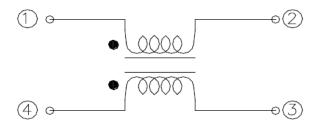


Materials



	Description	Specification
a	Upper Plate	Ni-Zn Ferrite
b	Core	Ni-Zn Ferrite
c	Wire	Enameled copper wire
d	Electrode	Ag/Ni/Sn

Part Identification

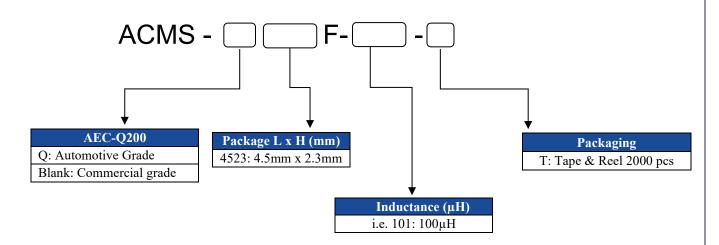





ACMS-Q4523F

Request Samples (>)




Check Inventory (>)



4.5 x 3.2 x 2.3 mm RoHS/RoHS II Compliant MSL Level = 1

Reflow Profile

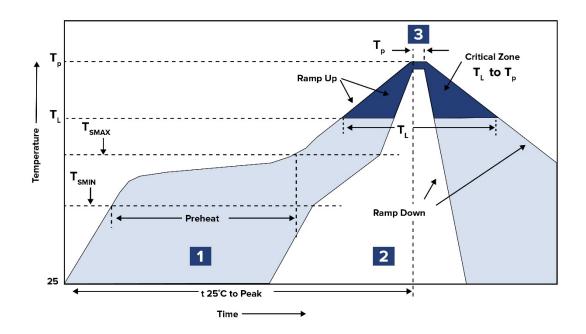

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX} \\ 150^{\circ}C \sim 200^{\circ}C$	$60 \sim 120 \text{ sec.}$
2	Reflow	T _L 220°C	60 ~ 90 sec.
3	Peak heat	T _P 260°C Max	10 sec. MAX





ACMS-Q4523F

Request Samples




Check Inventory (>)




4.5 x 3.2 x 2.3 mm **RoHS/RoHS II Compliant** MSL Level = 1

Packaging

Tape & Reel: 2000pcs/reel

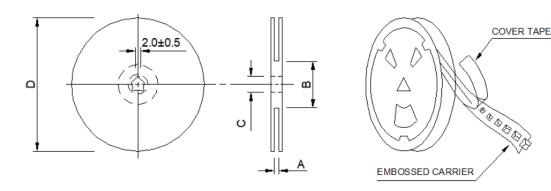

Series	A	В	C	D
ACMS-Q4523F	13.0 ± 0.5	100.0 ± 2.0	13.0 ± 0.5	330

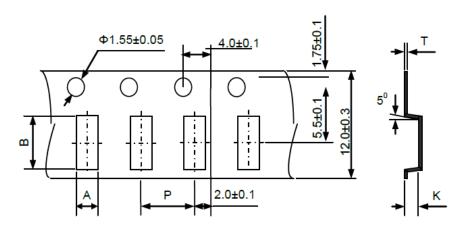

A	В	P	K	T
3.51	4.82	8.0	3.05	0.35
±0.10	± 0.10	± 0.10	± 0.10	± 0.05

Dimensions: mm

ATTENTION: Abracon LLC's products are COTS - Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

ACMS-Q4523F-101-T