APAES923R3640C16-T

MSL level: Not Applicable

- **FEATURES:**
 - High Gain
 - Pin type

 \triangleright

- Customization Available
- RoHS Compliance

STANDARD SPECIFICATIONS

RoHS/RoHS II compliant

36.0 x 36.0 x 4.0mm

0


TYPICAL APPLICATIONS:

RFID systems for Logistic & Inventory Management of Retail, Pharmaceutical, Automotive Industries; Industrial automation, Contactless smart cards.

STANDARD SPECIFICATIONS:									
Parameters	Min.	Тур.	Max.	Units	Note				
Receiving Frequency Range	918		927	MHz					
Center Frequency ^(*)		923	•	MHz	(On 40*40mm GND Plane)				
Bandwidth	5			MHz	(Return loss ≤-10dB)				
Gain		1.5		dBic	(Peak gain on (On 70*70mm GND Plane facing Zenith.)				
Axial Ratio			2.5	dB					
VSWR @ Center Frequency			1.5						
Polarization Model		RHCP			(Right Hand Circular Polarization)				
Impedance	50		Ω						
Frequency Temperature Coefficient	-10		10	ppm/°C					

^(*) Application environment, including size of the ground plane, proximity to adjacent components, etc., will affect stated performance. Fine tuning might be required when installed on end-customer's PCB. Abracon offers Antenna Optimization Service, please contact Abracon.

TEST CONDITIONS & TEST SETUP:

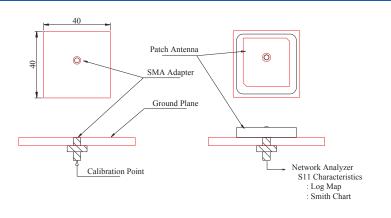

STRUCTURE AND MATERIAL

Description	Material
Antenna Substrate	Dielectric Ceramics
Pin	Copper and tinplated
Electrode	Ag Plated
Ground Plane	Ag Plated
Adhesive Type	NITTO 5000NS





APAES923R3640C16-T

RoHS/RoHS II compliant

36.0 x 36.0 x 4.0mm

0

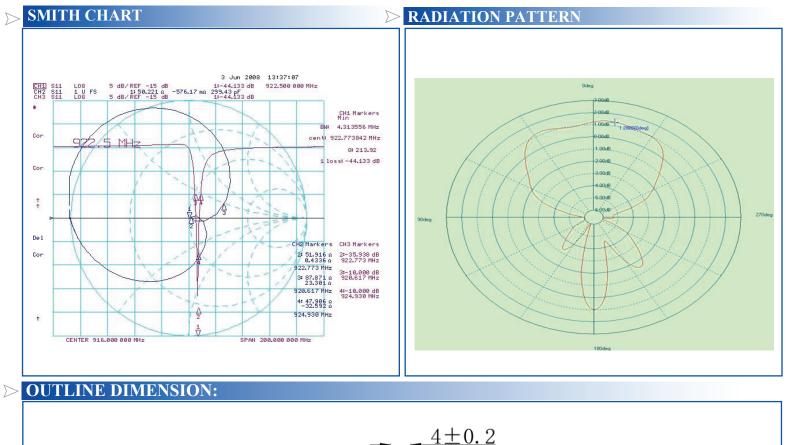

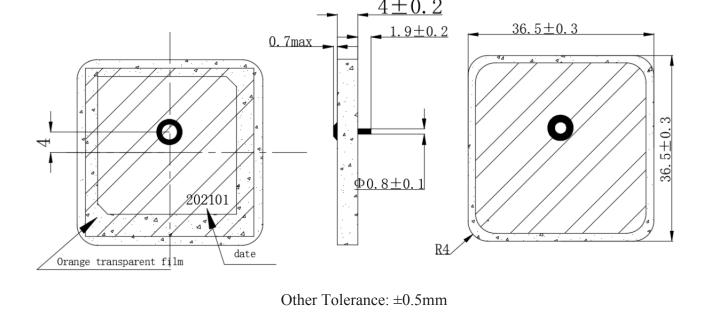

Unit: mm



ABRACON IS

ISO9001-2015

CERTIFIED

APAES923R3640C16-T

•

36.0 x 36.0 x 4.0mm

PACKAGING:

Package Type Quantity Tray 25 pcs/tray Inner Box 250 pcs/box Outer Box 500 pcs/box Image: International content of the state of t	Package Type Quantity Tray 25 pcs/tray Inner Box 250 pcs/box Outer Box 500 pcs/box Image: State of the			*		240,5	 -
TYPE QTY: PCS QTY: PCS StZE: 530 × 255 × 235mm G. WT kG N. WT kG	TYPE TYPE	Tray Inner Box	25 pcs/tray 250 pcs/box				240.5
Inner Box Outer Box			255	SYZE	PCS :530×255×235 kG N.WT 530±5.0		

CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

NOTE:

1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.

ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.

4) When changing your production process, please notify ABRACON immediately.

5) ABRACON Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.

6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

ABRACON IS ISO9001-2015 CERTIFIED



REVISED: 07/19/2021 Headquarters: 5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON: APAES923R3640C16-T