## APAM2764YK0175

#### **MSL level: Not Applicable**

#### **FEATURES:**

- Compact Size
- Easy to Install
- RoHS Compliant

## **STANDARD SPECIFICATIONS:**

#### Antenna

#### **RoHS/RoHS II compliant**




#### **TYPICAL APPLICATIONS:**


- Automotive Navigation, Marine buoys
- Personal Tracking
- Surveying equipment, Cell phone, Laptop
- Healthcare and medical monitoring devices, PND, PDA

Antunia						
Parameters	Min.	Тур.	N	lax.	Units	Note
Center Frequency	1575.42±1.02				MHz	
Bandwidth	5				MHz	
Gain		2.5			dBic	(Peak gain on 70*70mm Ground Plane facing Zenith.)
VSWR @ Center Frequency		1.5				
Polarization Model		RHCP				(Right Hand Circular Polarization)
Impedance		50			Ω	
Frequency Temperature Coefficient	-10			10	ppm/°C	
Working Temperature	-25			+72	°C	
Storage Temperature	-45			+85	°C	

### Low Noise Amplifier (LNA)

Parameters	Min.	Typ.	Max.	Units	Note
Center Frequency	157	5.42±1.02		MHz	
DC Voltage	2.7		3.3	V	
Gain		28		dB	(Without cable $+25^{\circ}C \pm 10^{\circ}C$ )
Output VSWR			2.0		
Noise Figure		1.3			(+25°C± 10°C)
DC current		9.8		mA	(At 3.0V)
SMITH CHART		CPS LNA GAIN PLOT			

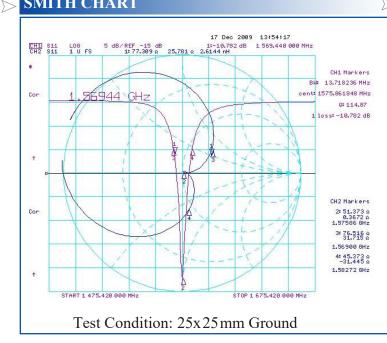

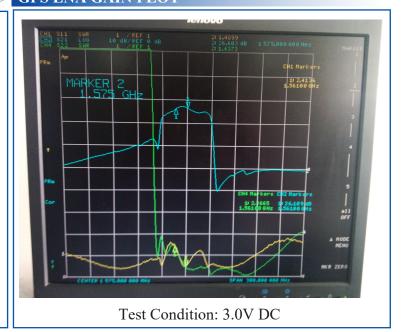




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com


REVISED: 10.13.2020

ABRACON IS ISO9001-2015 CERTIFIED

## APAM2764YK0175

### **OUTLINE DIMENSION:**





	Description	Material
	Antenna Type	Dielectric Ceramics
	PCB	FR4
	Shielding	Tinplate
	RF Cable	9851SC0032-002, φ1.13±0.1mm, L=50mm, L1=36mm
	RF Connector	I-PEX
2mm	Thickness	7.0mm (Max)

**PACKAGING** 

Package Type	Quantity			
Tray	50 pcs/tray			
Vacuum Bag	200pcs/box			
Outer Box	1000 pcs/box			


4.7

L

Tolerance: ±0.21

<u>6.0</u> 6.7

	-328	

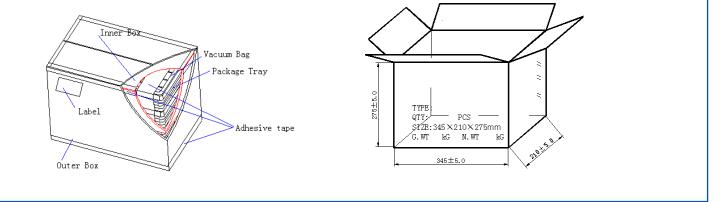

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 10.13.2020







Unit: mm

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON: APAM2764YK0175