## APAMS-121

**RoHS/RoHS II compliant** Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I) 86.0 x Ø10.0mm

#### **MSL level: Not Applicable**

#### **FEATURES**:

- High Reliability/ Sensitivity
- Compact Size
- · Easy to install
- ROHS Compliant

## **ELECTRICAL SPECIFICATIONS:**

	Specification				
Parameter	Min	Тур	Max	Units	Note
Energy and Denge	2.4		2.5	CII-	
Frequency Range	5.0		6.0	GHz	
VSWR			2.5		
Polarization	Vertical				
Impedance		50		Ω	
Gain			2.5	dBi	
Azimuth	Omni-directional				
Power Handling Capacity	50		W		
Lighting Protection	Direct Current earth				

## **MECHANICAL SPECIFICATION:**

Parameter	Specification	Note
Connector	SMA-RP	
Cable Type	RG-178	Inside the enclosure, 50 $\Omega$
Radiator	Cuprum	
Enclosure	TPE	
Base	PBT + PC	
Radome Color	Black	

### **ENVIRONMENTAL SPECIFICATION:**

Parameter	Specification	Note
RoHS Compliant	Yes	
MSL	N/A	
Operating temperature	-40 °C to +60 °C	
Storage temperature	-20 °C to +40 °C	



1501 Hidden Creek Lane Spicewood TX 78751 Phone: 949-546-8000 | Fax: 949-546-8001 www.abracon.com

REVIS	SED:	12/18	/2019
	ABRA	CON IS	
	ISO90	01-2015	
	CERT	IFIED	

### **TYPICAL APPLICATIONS:**

- Bluetooth
- WiFi 2.4GHz and 5GHz
- Routers


# APAMS-121

**RoHS/RoHS II compliant** Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



**MSL level: Not Applicable** 



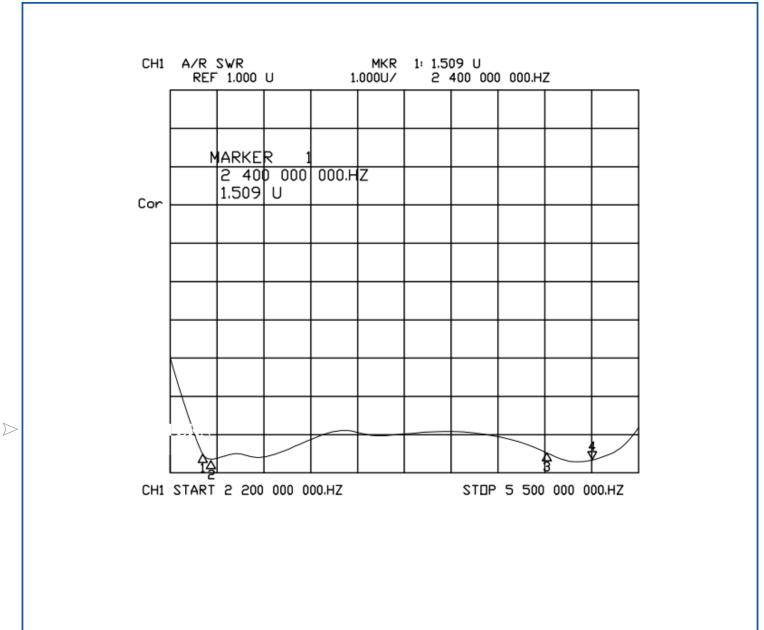



1501 Hidden Creek Lane Spicewood TX 78751 Phone: 949-546-8000 | Fax: 949-546-8001 www.abracon.com

REVIS	SED:	12/18	/2019
	ABRA	CON IS	
	ISO90	01-2015	
	CERT	IFIED	


## APAMS-121

#### RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)

86.0 x Ø10.0mm

### **MSL level: Not Applicable**

### **RADIATION PATTERN**

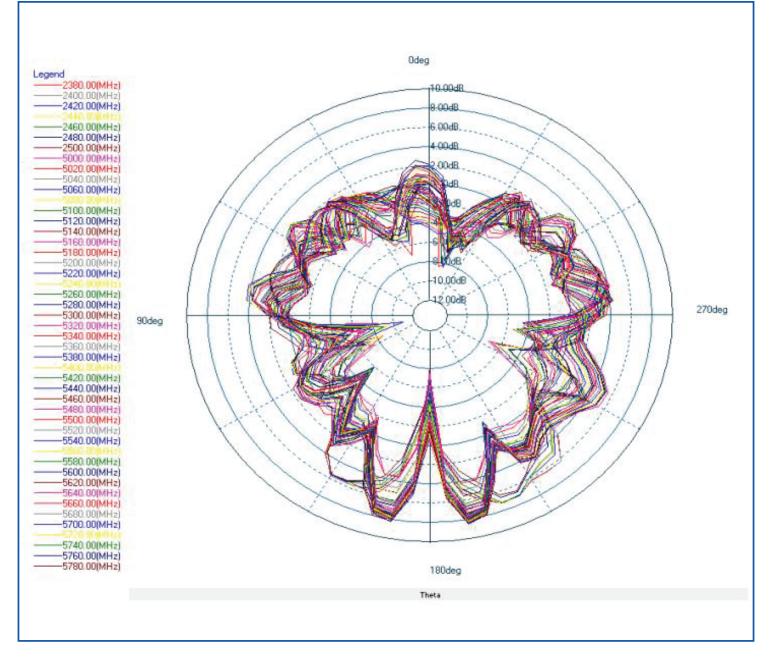




1501 Hidden Creek Lane Spicewood TX 78751 Phone: 949-546-8000 | Fax: 949-546-8001 For terms and conditions of sales visit: www.abracon.com

REVIS	SED:	12/18	/2019
	ABRA	CON IS	
	ISO90	01-2015	
	CERT	IFIED	

# APAMS-121

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I) 86.0 x Ø10.0mm

### **OUTLINE DRAWING:**

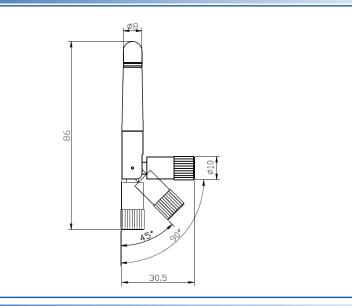

Unit: mm

## **PACKAGING:**

Package Type	Quantity	
Plastic bag	1 pcs/ Plastic bag	DIELECTRIC ANTENNA
Outer Box	1000 pcs/box	$\begin{array}{c c} & & & \\ \hline \\ & &$
		Outer box

#### **CAUTION:**

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



1501 Hidden Creek Lane Spicewood TX 78751 Phone: 949-546-8000 | Fax: 949-546-8001 For terms and conditions of sales visit: www.abracon.com

REVI	SED:	12/18	/2019
	ABRA	CON IS	
	ISO900	01-2015	
	CERT	IFIED	

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON: APAMS-121