RJ45, Single Port, Tap Up, Thru-Hole, 1000 Base-T

ARJE-0025

RoHS/RoHS II Compliant



FEATURES:

- Compliant with IEEE802.3 standard
- 350uH minimum OCL with 8mA bias current
- High performance for maximum EMI suppression
- High reliability 750 mating/unmating cycles

> APPLICATIONS:


- Designed for Marvell 88E1111 Gigabit Ethernet transceiver device
- Supports 10/100/1000 Base-Tapplications
- Provides signal conditioning, EMI suppression and signal isolation.

STANDARD SPECIFICATIONS

Operating temperature range: 0°C to +70°C Storage temperature range: -40°C to +85°C

Parameters	Minimum	Typical	Maximum	Units	Notes
Turn Ratio (±3%)	1CT:1CT				
Inductance	350			uН	100kHz, 0.1Vrms, 8mADC
Insertion Loss			-1.0	dB	0.1-100MHz
Return Loss	-16.0				1-30MHz
	-14.5			dB	30-60MHz
	-12.0				80MHz
Crosstalk	-30.0			dB	0.1-100MHz
CMRR	-30			dB	0.1-100MHz
Hipot	1500Vrms				Pri to Sec

MECHANICAL DIMENSIONS

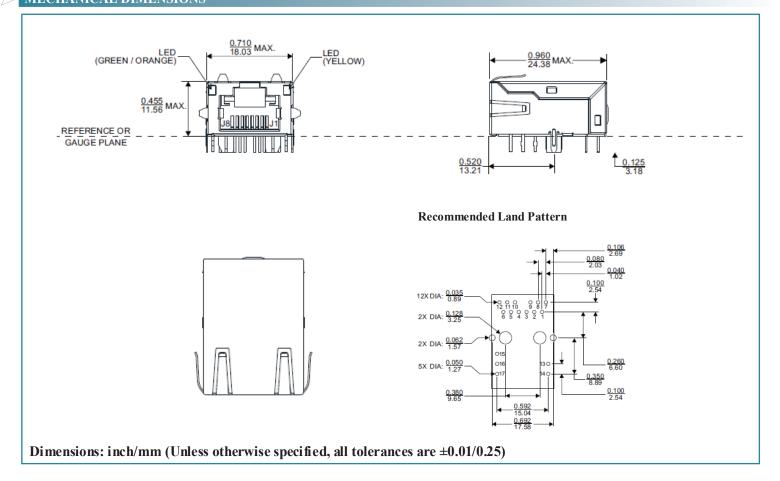






RJ45, Single Port, Tap Up, Thru-Hole, 1000 Base-T

ARJE-0025

RoHS/RoHS II Compliant



SCHEMATICS

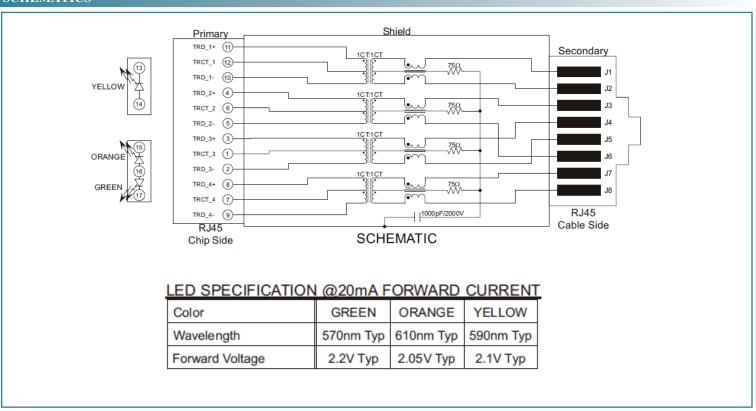

Packing: 50pcs/tray

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:
ARJE-0025