

Metal Alloy SMD Power Inductor



ASPI-M3015 Series

Request Samples



Check Inventory



3.0 x 3.0 x 1.5 mm
RoHS/RoHS II Compliant
MSL Level = 1

Features

- Space saving small footprint 3.0x3.0mm (9mm²)
- Low profile design—1.5mm MAX
- High RMS current carrying up to 5A
- High saturation current—up to 9A
- Low DCR minimizes heat dissipation—as low as 25mΩ
- Wide inductance range—0.47 to 10μH
- Wide -40°C to 125°C operating temperature range

Applications

- IoT/Industrial IoT
- Drones and robotics
- Audio and video
- Switch mode power supplies (SMPS)
- Medical and medical monitoring
- Class D amplifiers
- DC/DC converter
- LED drivers and lighting
- POL Converters

Electrical Specifications

Part Number	Inductance	Tolerance	DC Resistance		Saturation Current		Temperature Rise Current	
	0.1MHz/1.0V		Max	Typ.	Max	Typ.	Max	Typ
Units	μH	%	mΩ		A		A	
Symbol	L	M	DCR		Isat		Irms	
ASPI-M3015-R47	0.47	20%	30	25	7.50	9.00	4.60	5.00
ASPI-M3015-1R0	1.00	20%	48	40	5.30	6.30	3.60	3.95
ASPI-M3015-1R5	1.50	20%	54	45	3.60	4.30	3.40	3.70
ASPI-M3015-2R2	2.20	20%	78	65	3.10	4.00	2.80	3.10
ASPI-M3015-3R3	3.30	20%	102	85	2.50	3.20	2.45	2.65
ASPI-M3015-4R7	4.70	20%	152	126	2.20	2.60	2.00	2.20
ASPI-M3015-6R8	6.80	20%	220	183	1.80	2.00	1.65	1.80
ASPI-M3015-100	10.0	20%	320	270	1.50	1.80	1.35	1.50

Test Conditions

Isat: DC current at which the inductance drops 30% from its value without current.

Irms: DC current that causes the temperature rise (ΔT, approximate 40 °C) from 25°C ambient

Operating Temperature: -40°C ~ +125°C (including self-temperature rise)

Storage Condition: -40°C ~ +125°C (on board), -10°C ~ +40°C (with packaging) and R.H. 60 max

Operating Voltage: 20V (across inductor)

ASPI-M3015 Series is **RoHS Compliant and Pb free**




5101 Hidden Creek Ln, Spicewood TX 78669
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION A : 10/23/2024

ABRACON IS
ISO9001-2015
CERTIFIED

Metal Alloy SMD Power Inductor



ASPI-M3015 Series

Request Samples




Check Inventory




3.0 x 3.0 x 1.5 mm
RoHS/RoHS II Compliant
MSL Level = 1

Part Identification

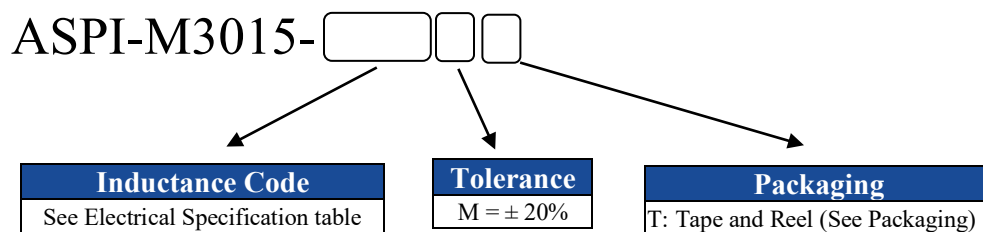

Marking

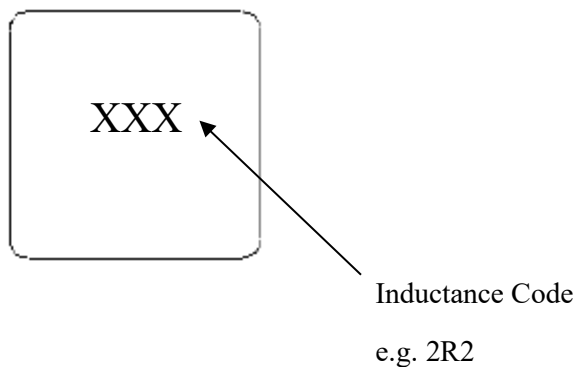

Marking Method = Ink Marking

Metal Alloy SMD Power Inductor



ASPI-M3015 Series

Request Samples




Check Inventory




3.0 x 3.0 x 1.5 mm
RoHS/RoHS II Compliant
MSL Level = 1

Mechanical Specifications

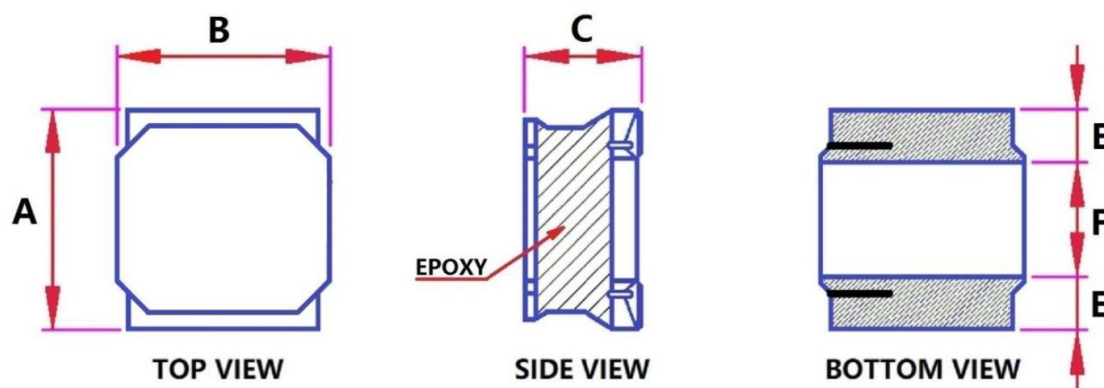

Series	A	B	C	E	F
ASPI-M3015	3.0±0.2	3.0±0.2	1.50 MAX	0.90	1.20



Dimensions: mm

L	G	H
3.1 ref	1.2 ref	2.7 ref.

Metal Alloy SMD Power Inductor



ASPI-M3015 Series

Request Samples




Check Inventory



3.0 x 3.0 x 1.5 mm
RoHS/RoHS II Compliant
MSL Level = 1

Reflow Profile

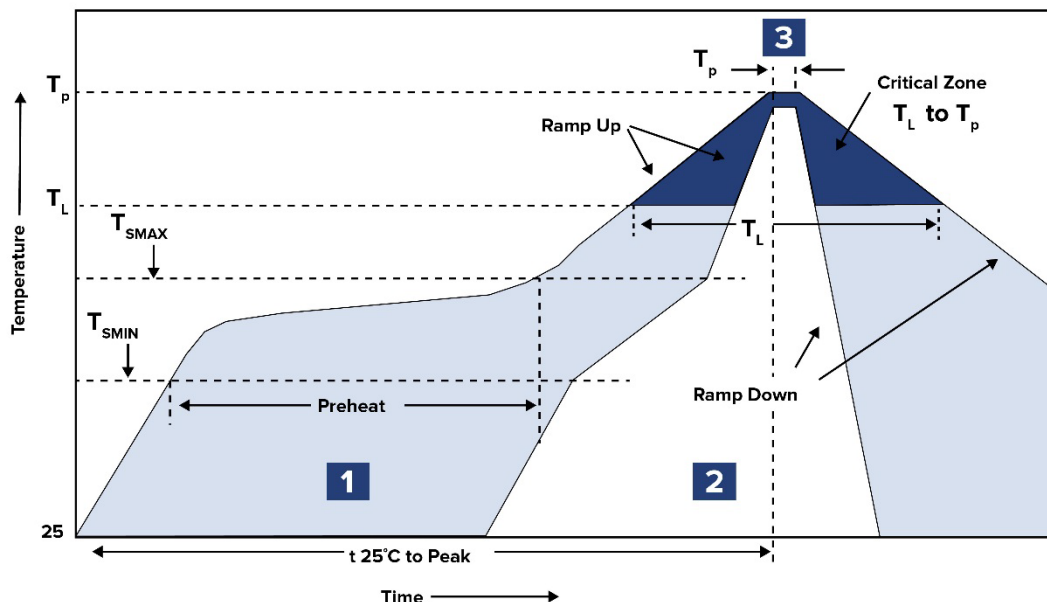

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ $150^{\circ}C \sim 170^{\circ}C$	60 ~ 120 sec.
2	Reflow	T_L $230^{\circ}C$	30 ~ 40 sec.
3	Peak heat	T_p $250^{\circ}C \pm 5^{\circ}C$	10 sec. MAX

Metal Alloy SMD Power Inductor



ASPI-M3015 Series

Request Samples





Check Inventory



3.0 x 3.0 x 1.5 mm
RoHS/RoHS II Compliant
MSL Level = 1

Packaging

Tape & Reel: 2,000 pcs/reel

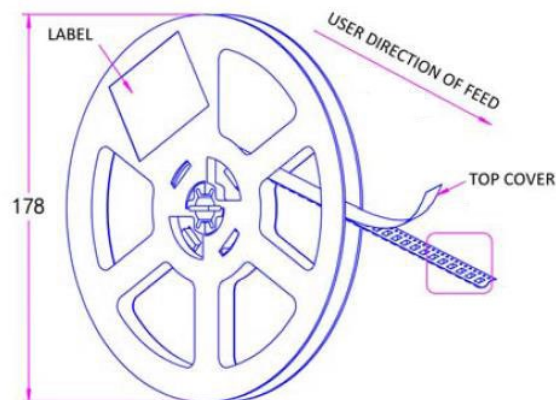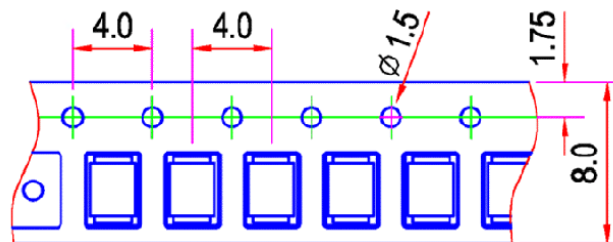

Dimensions: mm

ATTENTION: Abracon LLC's products are Commercial-Off-The-Shelf (COTS, which are designed, intended and validated for use in commercial, industrial and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.



5101 Hidden Creek Ln, Spicewood TX 78669
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION A : 10/23/2024

ABRACON IS
ISO9001-2015
CERTIFIED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[ASPI-M2512-R33M-T](#) [ASPI-M2512-R47N-T](#) [ASPI-M3015-R68M-T](#) [ASPI-M2512-4R7N-T](#) [ASPI-M2512-3R3N-T](#)
[ASPI-M2512-R24N-T](#) [ASPI-M3015-3R3M-T](#) [ASPI-M3015-R47M-T](#) [ASPI-M3015-4R7M-T](#) [ASPI-M2512-R33N-T](#) [ASPI-](#)
[M2512-3R3M-T](#) [ASPI-M2512-1R0M-T](#) [ASPI-M3015-6R8M-T](#) [ASPI-M2512-4R7M-T](#) [ASPI-M2512-2R2N-T](#) [ASPI-](#)
[M2512-R68M-T](#) [ASPI-M2512-100N-T](#) [ASPI-M2512-1R5N-T](#) [ASPI-M2512-R24M-T](#) [ASPI-M3015-1R5M-T](#) [ASPI-](#)
[M2512-R47M-T](#) [ASPI-M2512-2R2M-T](#) [ASPI-M2512-1R5M-T](#) [ASPI-M3015-2R2M-T](#) [ASPI-M3015-1R0M-T](#) [ASPI-](#)
[M2512-100M-T](#) [ASPI-M2512-1R0N-T](#) [ASPI-M3015-100M-T](#) [ASPI-M2512-R68N-T](#)