
303.875MHz SMD One Port SAW Resonator

ASR303.875A01-SE





FEATURES:

- Low insertion loss 2.5dB max
- 5.0 x 5.0 x 1.5mm package
- 50Ω impedance termination
- Suitable for RoHS compliant reflow

> APPLICATIONS:


- Wireless remote controller
- Mobile communication


STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency (f ₀)	303.800	303.875	303.950	MHz	
Insertion Loss		1.5	2.5	dB	
Quality Factor		12,000			Unloaded Q
		2,000			50Ω loaded Q
Turnover Temperature	15	25	30	°C	
Freq. Temp. Coefficient		0.032		ppm/°C	
Frequency Aging		<±10		ppm/yr	
DC Insulation Resistance	1.0			ΜΩ	
Motional Resistance R1		12	19	Ω	
Motional Inductance L1		94		uН	
Motional Capacitance C1		29		fF	
Shunt Static Capacitance C0	2.7	3.0	3.3	pF	
Operation Temperature Range	-40		+80	°C	
Storage Temperature Range	-45		+85	°C	
DC Voltage			10	Vdc	
Source Power			0	dBm	

EQUIVALENT LC MODEL

TEST CIRCUIT

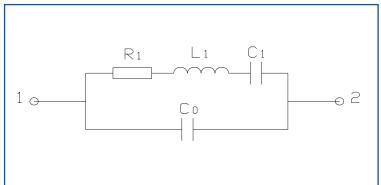

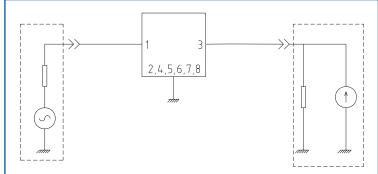





ASR303.875A01-SE SMD One Port SAW Resonator

ASR303.875A01-SE







OUTLINE DIMENSIONS:

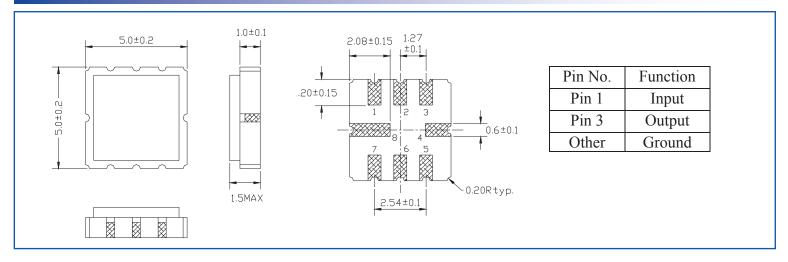

TAPE AND REEL: 1,000pcs/reel

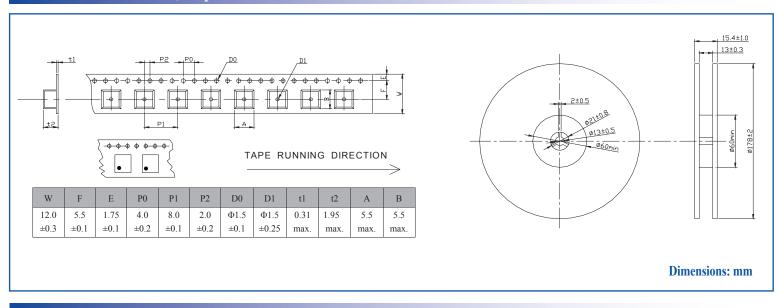

REFLOW PROFILE:

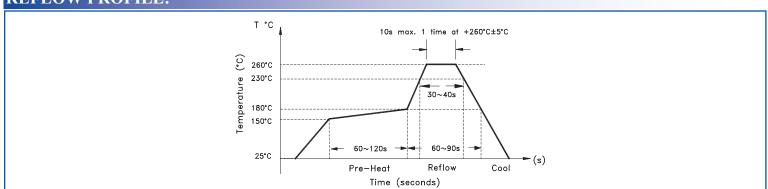

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

ASR303.875A01-SE