

Precision SMD VCTCXO/TCXO

AST3TDA53

Request Samples



Check Inventory



ESD Sensitive



5.0 x 3.2 x 0.7 mm

RoHS/RoHS II Compliant

MSL Level = 3

Features

- Wide operating temperature range with high stability:
-40°C to +105°C @ ±280ppb
- Standard available frequencies: 10, 12.8, 16.384, 19.2, 19.44, 20, 30.72, 38.88, 40, 50MHz
- CMOS or Clipped Sine Wave output
- Voltage-control option available

Applications

- Stratum 3
- Network routers and switches
- COTS Military Radios & other Communication Hardware
- Wireless Communication
- GPS Tracking with Hold-Over Accuracy
- Test & Measurement Equipment
- Autonomous Technologies

Maximum Ratings

Parameters	Notes
Storage Temperature Range	-55 to +105°C
Supply Voltage	-0.5 to 6V
Control Voltage	0 to 3.3V
ESD, HBM/CDM/MM	4kV/2kV/200V/400V

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Range	10		50	MHz	
Standard Frequencies	10, 12.8, 16.384, 19.2, 19.44, 20, 30.72, 38.88, 40, 50			MHz	
Operating Temperature Range	-40		+105	°C	See options
Initial Frequency Tolerance at shipping	-1		+1	ppm	@ T _A = 25°C, V _{cc} = 3.3V, V _c = 1.65V within 30 days after ex-works
Frequency Stability over Operating Temperature Range [Note 1]	-280		+280	ppb	
Frequency Stability vs. Supply Voltage Change (V _{dd} ±5%)	-100		+100	ppb	@ T _A = 25°C, V _{cc} varied from 3.13V to 3.47V, V _c = 1.65V
Frequency Stability vs. Load Change (Load±5%)	-100		+100	ppb	5% load change @ T _A = 25°C, V _{cc} = 3.3V, V _c = 1.65V, O _{Load} = 15pF
Short Term Stability			200	ppb	after power for 1 hour ref. to 25°C
Aging (first year)	-1		+1	ppm	T _A = 25°C, V _{cc} = 3.3V, after 1h of operation
Aging (20 years @+25°C)	-3		+3	ppm	
Supply Voltage (V _{dd})	3.13	3.3	3.47	V	See options
Supply Current (I _{cc})			10	mA	25°C, V _{cc} = 3.3V, O _{Load} = 15pF
Start-up Time			5	ms	
Control Port (<i>Applicable for VCTCXO only</i>)					
Control Voltage Range (V _c)	0		3.3	V	
Center Control Voltage (V _c)		1.65		V	
Frequency Tuning Range (Carrier Frequency ≤ 20MHz)			-8	ppm	V _c = 0V, referenced to V _c = 1.65V
	-1		+1	ppm	V _c = 1.65V, referenced to carrier frequency
	+8			ppm	V _c = 3.3V, referenced to V _c = 1.65V
Frequency Tuning Range (Carrier Frequency > 20MHz)			-5	ppm	V _c = 0V, referenced to V _c = 1.65V
	-1		+1	ppm	V _c = 1.65V, referenced to carrier frequency
	+5			ppm	V _c = 3.3V, referenced to V _c = 1.65V

Note 1: T_A varied from -40°C to 105°C, measurement referenced to frequency observed with f_{ref} = (f_{max} + f_{min}) / 2, V_{cc} = 3.3V, V_c = 1.65V, temperature variable speed less than 2°C/min.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 06-07-21

ABRACON IS
ISO9001-2015
CERTIFIED

Precision SMD VCTCXO/TCXO

AST3TDA53

Request Samples



Check Inventory



ESD Sensitive



5.0 x 3.2 x 0.7 mm
RoHS/RoHS II Compliant
MSL Level = 3

Electrical Specifications *continued*

Parameters	Min.	Typ.	Max.	Units	Notes
Tuning Slope	Positive				
Linearity			10	%	
Port Impedance	100			kΩ	
Phase Noise @ 19.2MHz (@25°C):		-95	-90	dBc/Hz	Offset @10Hz
		-120	-115		Offset @100Hz
		-145	-140		Offset @1kHz
		-157	-152		Offset @10kHz
		-159	-154		Offset @100kHz
		-159	-154		Offset @1MHz
	Phase Noise @ 20MHz (@25°C):		-93		-88
		-120	-115	Offset @100Hz	
		-145	-140	Offset @1kHz	
		-157	-152	Offset @10kHz	
		-159	-154	Offset @100kHz	
		-159	-154	Offset @1MHz	
Phase Noise @ 38.88MHz (@25°C):			-90	-85	dBc/Hz
		-115	-110	Offset @100Hz	
		-135	-130	Offset @1kHz	
		-148	-143	Offset @10kHz	
		-150	-145	Offset @100kHz	
		-151	-146	Offset @1MHz	
	Clipped Sine Wave Output				
Output Level	0.8			V _{p-p}	
Output Load	10kΩ//10pF				
CMOS (Square Wave) Output					
V _{OH}	2.4			V	V _{cc} =3.3V, O _{load} =15 pF
V _{OL}			0.4	V	V _{cc} =3.3V, O _{load} =15 pF
Output Load	15			pF	
Duty Cycle	45	50	55	%	@50%
Rise / Fall Time (10%~90%)			8	ns	@25°C

Precision SMD VCTCXO/TCXO

AST3TDA53

Request Samples



Check Inventory



ESD Sensitive




5.0 x 3.2 x 0.7 mm

RoHS/RoHS II Compliant

MSL Level = 3

Part Identification

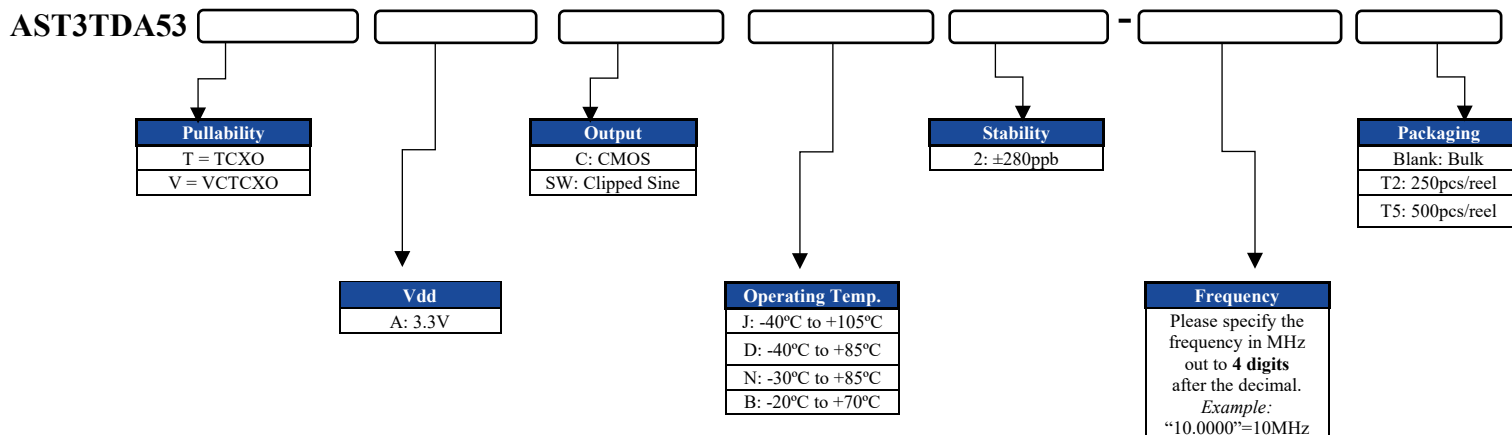

Precision SMD VCTCXO/TCXO

AST3TDA53

Request Samples



Check Inventory




ESD Sensitive




5.0 x 3.2 x 0.7 mm
RoHS/RoHS II Compliant
MSL Level = 3

Mechanical Dimensions

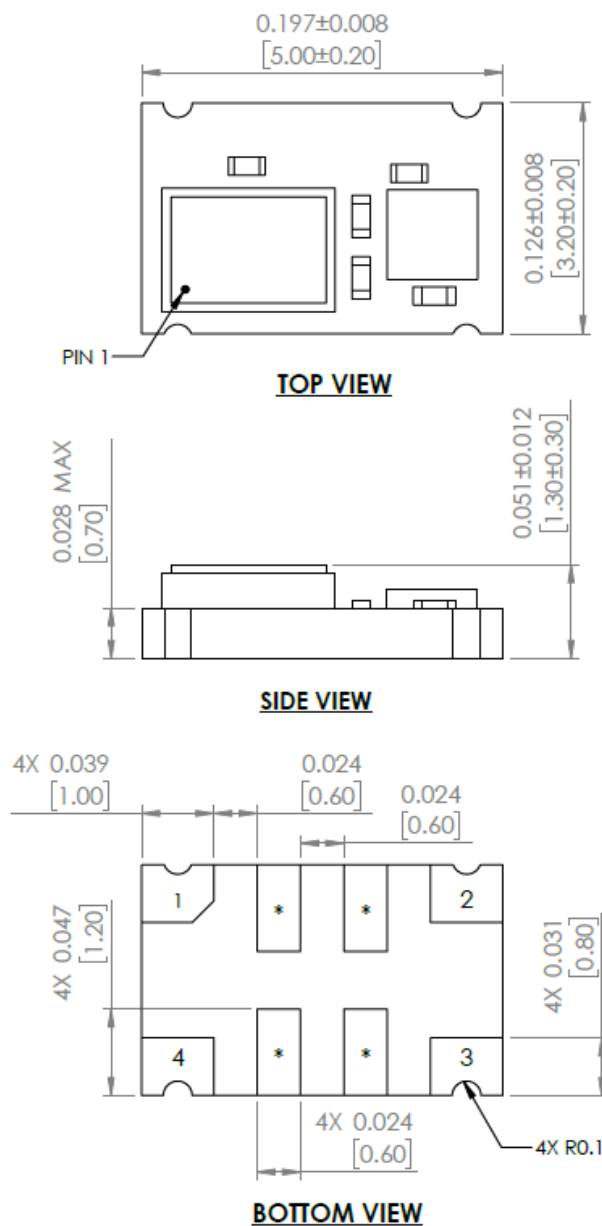

Recommended Land Pattern

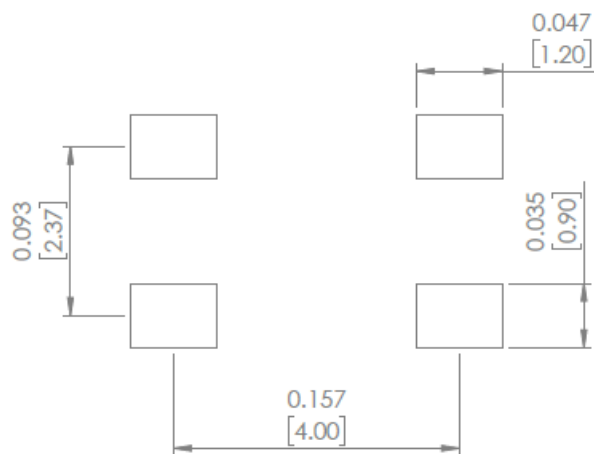

Pin #	Function
1	Do not connect (for TCXO) Voltage control (for VCTCXO)
2	GND
3	Output
4	Vdd
*	Do not connect

Dimensions: inches [mm]
Tolerance ± 0.2 mm

Precision SMD VCTCXO/TCXO

AST3TDA53

Request Samples



Check Inventory



ESD Sensitive



5.0 x 3.2 x 0.7 mm
RoHS/RoHS II Compliant
MSL Level = 3

Reflow Profile [JEDEC J-STD-020]

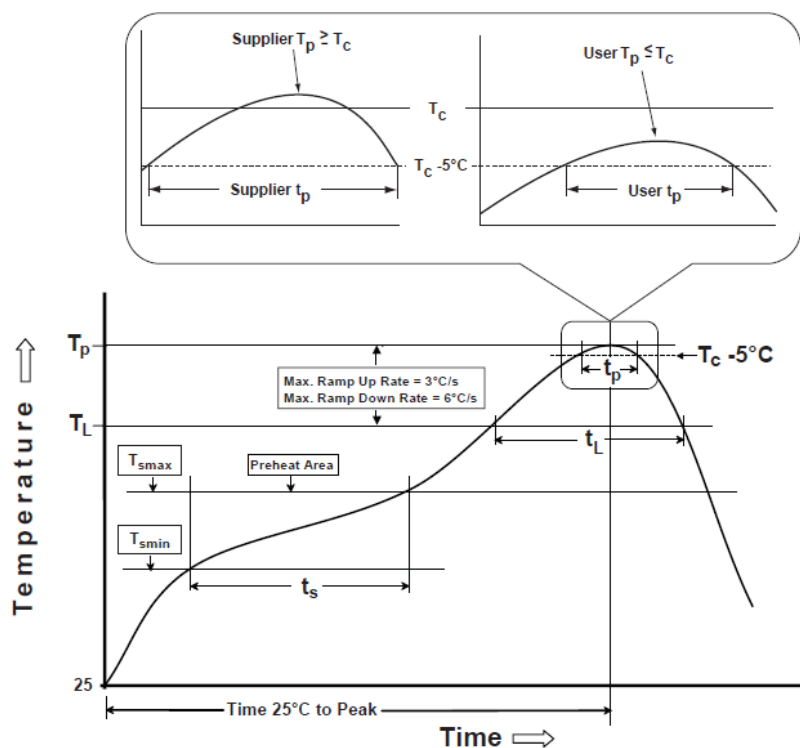


Table 1

SnPb Eutectic Process
Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process
Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

Precision SMD VCTCXO/TCXO

AST3TDA53

Request Samples



Check Inventory



ESD Sensitive




5.0 x 3.2 x 0.7 mm
RoHS/RoHS II Compliant
MSL Level = 3

Packaging

T2: 250pcs/reel

T5: 500pcs/reel

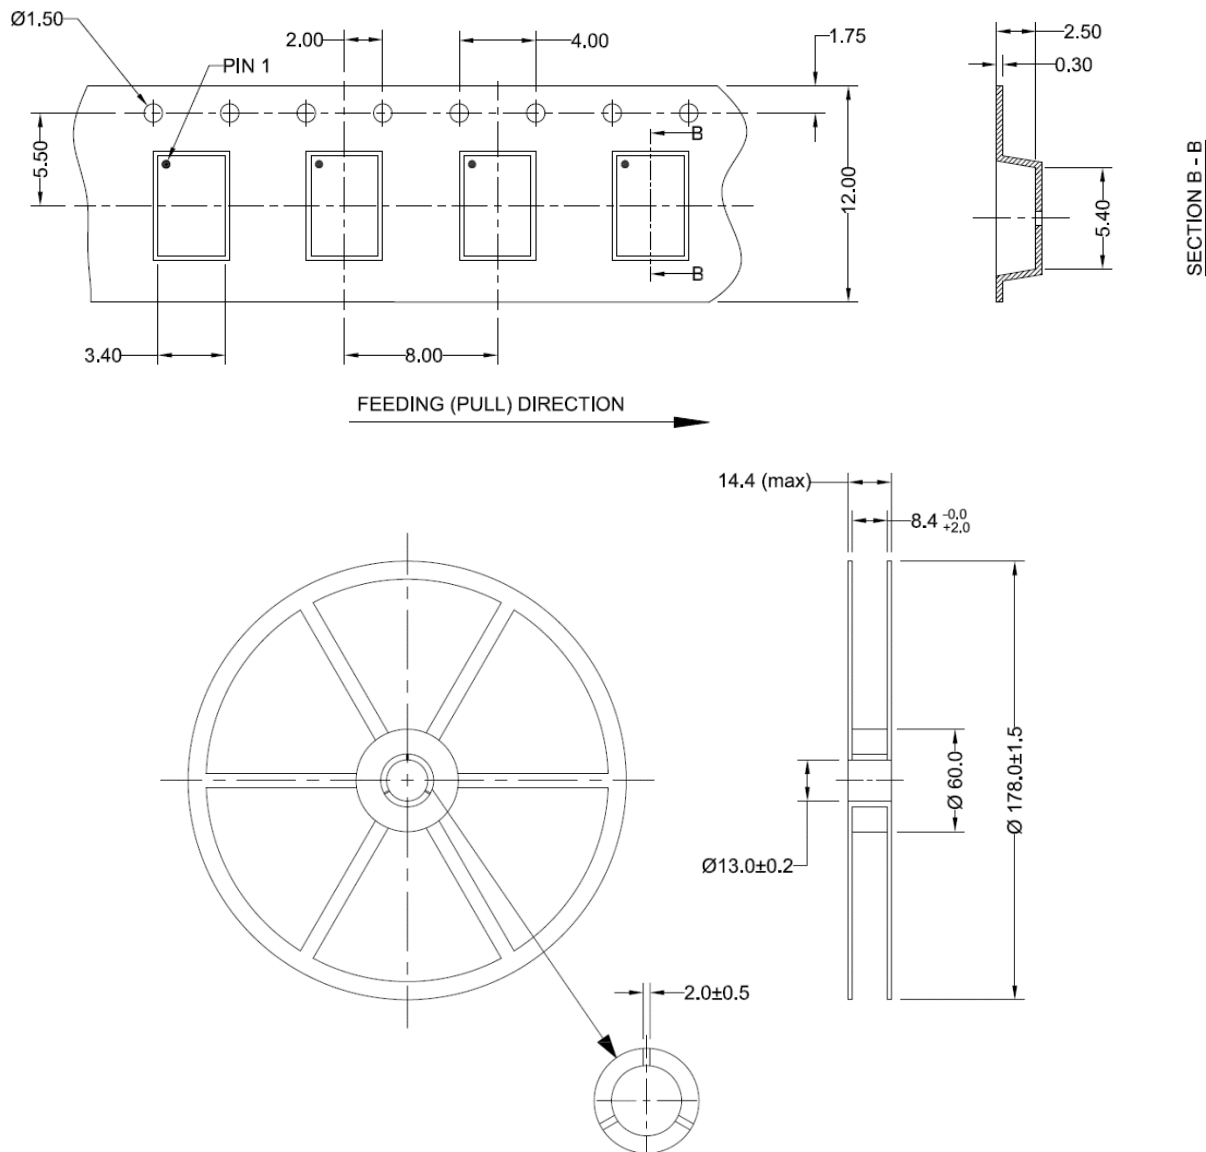

Dimensions: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 06-07-21

ABRACON IS
ISO9001-2015
CERTIFIED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[AST3TDA53TACJ2-19.2000MHz](#) [AST3TDA53TACJ2-20.0000MHz](#) [AST3TDA53TACJ2-38.8800MHz](#)
[AST3TDA53TACJ2-19.2000MHzT2](#) [AST3TDA53TACJ2-19.2000MHzT5](#) [AST3TDA53TACJ2-20.0000MHzT2](#)
[AST3TDA53TACJ2-20.0000MHzT5](#) [AST3TDA53TACJ2-38.8800MHzT2](#) [AST3TDA53TACJ2-38.8800MHzT5](#)
[AST3TDA53TACJ5-20.0000MHzT2](#)