

# FC3BS

(Former FX325BS)

3.2mm x 2.5mm  
Ceramic SMD Crystal



STANDARD SPECIFICATIONS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	8.000 ~ 54.000 MHz
Frequency Tolerance @ 25°C	(See options below)
Frequency Stability, ref 25°C	(See options below)
Temperature Range	
Operating (T <sub>OPR</sub> )	(See options below)
Storage (T <sub>STG</sub> )	-55°C ~ +125°C
Shunt Capacitance (C <sub>0</sub> )	3.0 pF
Load Capacitance (C <sub>L</sub> )	(See options below)
Drive Level	100 μW
Aging per year (@ 25°C)	±5 PPM
Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL) per J-STD-033	1
Termination Finish	Au (0.3~1.0μm) over Ni (1.27~8.89μm)
Seal Method	Seam
Lead (Pb) Free	Yes
RoHS Compliant	Yes

Frequency Range (MHz)	Operating Mode	Max ESR Ω
8.000 ~ 9.999999	Fundamental	500
10.000 ~ 11.999999	Fundamental	150
12.000 ~ 15.999999	Fundamental	80
16.000 ~ 19.999999	Fundamental	60
20.000 ~ 24.999999	Fundamental	50
25.000 ~ 54.000	Fundamental	40

DIMENSIONS / MECHANICAL SPECIFICATIONS	
<p><b>Top View</b></p>	
<p><b>Side View</b></p>	
<p><b>Bottom View</b></p>	
<p><b>Recommended Solder Pad Layout</b></p> <p>#2 &amp; #4 connected to metal top All Dimensions in mm</p>	
<p>Note: Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary.</p>	

AVAILABLE OPERATING TEMPERATURES AND STABILITIES*								
Operating Temperature	±5 PPM	±10 PPM	±15 PPM	±20 PPM	±25 PPM	±30 PPM	±50 PPM	±100 PPM
0°C ~ +50°C	X	O	O	O	O	O	O	N/A
0°C ~ +70°C	X	O	O	O	O	O	O	N/A
-10°C ~ +60°C	O	O	O	O	O	O	O	N/A
-10°C ~ +70°C	X	O	O	O	O	O	O	N/A
-20°C ~ +70°C	X	O	O	O	O	O	O	N/A
-30°C ~ +85°C	X	X	O	O	O	O	O	N/A
-40°C ~ +85°C	X	X	O	O	O	O	O	N/A
-40°C ~ +105°C	X	X	X	X	X	X	O	O
-40°C ~ +125°C	X	X	X	X	X	X	O	O
-55°C ~ +125°C	X	X	X	X	X	X	O	O

Key: O = Available, X = Not Available, N/A = Not applicable \*Does not imply a stocked part.


# FC3BS

(Former FX325BS)

3.2mm x 2.5mm  
Ceramic SMD Crystal



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.55	4.0	4.0	3.5	8.0	1.3	-T3 = 3,000 -T2 = 2,000 -T1 = 1,000	2.0	ø13	ø21	ø80	ø180	9.0	2.0

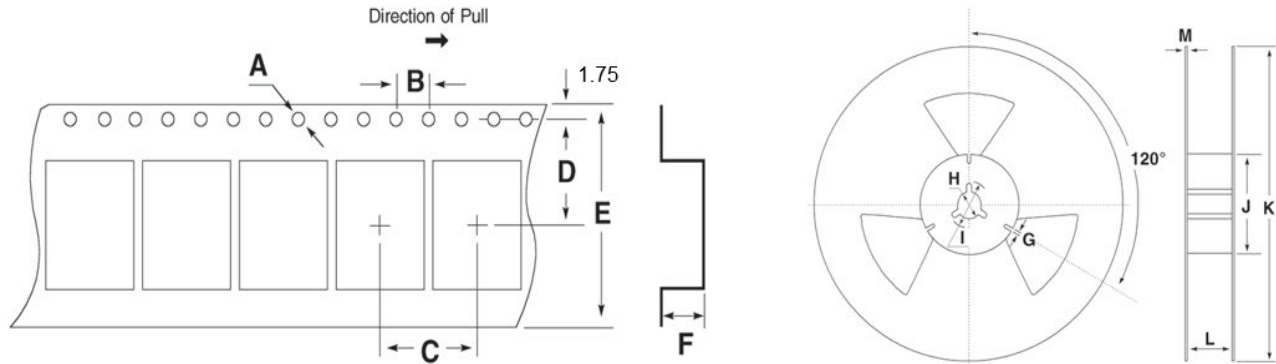

## Available Options & Part Identification for Crystal Model C3BS<sup>1</sup>

### FC3BSBBGM25.0-T1

F	C3BS	B	B	G	M	25.0	-T1
<b>Fox</b>	<b>Model Number</b>	<b>Tolerance</b>	<b>Stability</b>	<b>Load Capacitance<sup>2</sup></b>	<b>Operating Temperature</b>	<b>Frequency (MHz)</b>	<b>Values Added Options</b>
		B = ±50 PPM C = ±30 PPM D = ±25 PPM E = ±20 PPM F = ±15 PPM H = ±10 PPM	A = ±100 PPM B = ±50 PPM C = ±30 PPM D = ±25 PPM E = ±20 PPM F = ±15 PPM H = ±10 PPM L = ±5 PPM	V = 7pF D = 8pF W = 9pF E = 10pF <b>G = 12PF</b> J = 15PF K = 16PF L = 18pF M = 20pF	A = 0 to +50°C C = 0 to +70°C D = -10 to +60°C E = -10 to +70°C F = -20 to +70°C K = -30 to +85°C <b>M = -40 to +85°C</b> P = -40 to +105°C I = -40 to +125°C T = -55 to +125°C		Blank = Bulk T1 = 1,000 pcs T2 = 2,000 pcs T3 = 3,000 pcs

1 Not all frequency, tolerance, stability, load, and operating temperature combinations may be available.

2 Listed load capacitances represent the most commonly used. Other load capacitances are available. Contact us for assistance

### Reliability Test Conditions

Please contact Abracon Quality Assurance department

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [ABRACON:](#)

[FC3BSEEMF25.0-T3](#) [FC3BSHLGA27.0-1-T3](#) [FC3BSDDL16.0-T3](#) [FC3BSHEWP24.0-T3](#) [FC3BSHFDK32.0-T3](#)  
[FC3BSHHVD16.0-T3](#) [FC3BSEBLF16.0-T3](#) [FC3BSEEDM48B0-T3](#) [FC3BSEEDM49A152-T3](#) [FC3BSFDDM48.0-T3](#)  
[FC3BSFDGM48A0-T3](#) [FC3BSHFDM24.0-T3](#) [FC3BSHFEC32.0-T3](#) [FC3BSHFWM24.0-T3](#) [FC3BSHFWM24A0-T3](#)  
[FC3BSHHKD24.0-T3](#) [FC3BSCCGF10.0-T3](#) [FC3BSDDL25.0-T3](#) [FC3BSECLM24.0-T3](#) [FC3BSECWM24.0-T3](#)  
[FC3BSFFDE12.0-T3](#) [FC3BSFFDF16.0-T3](#) [FC3BSHFWM16.0-T3](#) [FC3BSHHGZ32.0-T3](#) [FC3BSCBGM26.0-T3](#)  
[FC3BSCBLF25.0-T3](#) [FC3BSECLP12.0-T3](#) [FC3BSECLP25.0-T3](#) [FC3BSEEGM40.0-T3](#) [FC3BSFFKM30.9-T3](#)  
[FC3BSHHEF26A0-T3](#) [FC3BSBBMM25.0-T3](#) [FC3BSBCEM26.0-T3](#) [FC3BSEEDM26.0-T3](#) [FC3BSEEJM16.0-T3](#)  
[FC3BSFCLM16.0-T3](#) [FC3BSHFWM20.0-T3](#) [FC3BSBBMM24.0-T3](#) [FC3BSEBLF25.0-T3](#) [FC3BSEEDM33A333333-T3](#)  
[FC3BSEEGD12.0-T3](#) [FC3BSHHEF12.0-T3](#) [FC3BSECLM12A288-T3](#) [FC3BSEEDM50A0-T3](#) [FC3BSFFDE22.1184-T3](#)  
[FC3BSFFDM12.0-T3](#) [FC3BSHFEM32.0-T3](#) [FC3BSHFWC32.0-T3](#) [FC3BSHHGF48.0-T3](#) [FC3BSDCEF32.0-T3](#)  
[FC3BSBBAD14.7456-T3](#) [FC3BSCCLM25.0-T3](#) [FC3BSCCNF24.0-T3](#) [FC3BSHCEE13.5-T3](#) [FC3BSCCGM24.0-T3](#)  
[FC3BSEEWM32.0-T3](#) [FC3BSFFGD12.0-T3](#) [FC3BSHHGD12.0-T3](#) [FC3BSBBED25.0-T3](#) [FC3BSHHDF29.4912-T3](#)  
[FC3BSHCEE13.0-T3](#) [FC3BSBBDF32.0-T3](#) [FC3BSBBLD23.456789-T3](#) [FC3BSEEMP25.0-T3](#) [FC3BSFFDM16.0-T3](#)  
[FC3BSCBGM16.0-T3](#) [FC3BSCCDA16.0-T3](#) [FC3BSCCEF24A0-T3](#) [FC3BSAAMC14.7456-T3](#) [FC3BSBALM114.285-T3](#)  
[FC3BSBCEF25.0-T3](#) [FC3BSEEDF16.0-T3](#) [FC3BSFFYE54.0-T3](#) [FC3BSHHDF16.0-T3](#) [FC3BSHHED19.2-T3](#)  
[FC3BSHHEF25A0-T3](#) [FC3BSHHWD26.0-T3](#) [FC3BSBBEM25.0-T3](#) [FC3BSBBLD25A0-T3](#) [FC3BSCCLM24.0-T3](#)  
[FC3BSEEDM39A0625-T3](#) [FC3BSEEDM49B152-T3](#) [FC3BSFDGD48B0-T3](#) [FC3BSHFDF40A0-T3](#) [FC3BSHFWM32.0-T3](#)  
[FC3BSHHWF25.0-T3](#) [FC3BSBBLE25.0-T3](#) [FC3BSBCLF24.0-T3](#) [FC3BSCCEM52.0-T3](#) [FC3BSEEDM25.0-T3](#)  
[FC3BSEEDP25.0-T3](#) [FC3BSHDLM24.0-T3](#) [FC3BSHFEM16.0-T3](#) [FC3BSHFGM25.0-T3](#) [FC3BSHHEF25.0-T3](#)  
[FC3BSHHGF26.0-T3](#) [FC3BSCBLM24.0-T3](#) [FC3BSECLM26.0-T3](#) [FC3BSEEGM49B152-T3](#) [FC3BSHFGM27.0-T3](#)