

Features

- HCMOS Output
- Stabilities to ± 20 PPM
- Temperature Ranges as wide as -40°C to $+125^{\circ}\text{C}$
- Supply Voltages: 1.0V; 1.5V; 1.8V; 2.5V; 3.3V; Variable (1.6V ~ 3.63V; 2.25V ~ 3.63V)

1.0V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_o)	1.8 ~ 50.0 MHz
Temperature Range	
Storage (T_{STG})	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	$1.0\text{V} \pm 5\%$
Input Current (I_{DD})	
1.8 ~ 32.1 MHz	2.5 mA
>32.1 ~ 50.0 MHz	3.5 mA
Standby Current	100 μA
Output Symmetry (50% V_{DD})	40 % ~ 60 %
Rise/Fall Time (20%/80% V_{DD} Levels) (T_R/T_F)	5 nS
Output Voltage (V_{OL})	20 % V_{DD}
(V_{OH})	80 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	50 μS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 1.0V		
Frequency Stability ²	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}$	$-10 \sim +70$	1.8 ~ 50.0
$\pm 100\text{PPM}$	$-40 \sim +85$	1.8 ~ 50.0
$\pm 50\text{PPM}$	$-10 \sim +70$	1.8 ~ 50.0
$\pm 50\text{PPM}$	$-40 \sim +85$	1.8 ~ 50.0
$\pm 25\text{PPM}$	$-10 \sim +70$	1.8 ~ 50.0
$\pm 25\text{PPM}$	$-40 \sim +85$	1.8 ~ 50.0
$\pm 20\text{PPM}$	$-10 \sim +70$	1.8 ~ 50.0

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, Vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

1.5V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_0)	1.25 ~ 50.0 MHz
Temperature Range	
Storage (T_{STG})	-55°C ~ +125°C
Supply Voltage (V_{DD})	1.5V±5%
Input Current (I_{DD})	
1.25 ~ 10.0 MHz	2.5 mA
>10.0 ~ 20.0 MHz	3.5 mA
>20.0 ~ 30.0 MHz	4.0 mA
>30.0 ~ 40.0 MHz	4.5 mA
>40.0 ~ 50.0 MHz	6.0 mA
Standby Current	100µA
Output Symmetry (50% V_{DD})	45 % ~ 55 %
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	10 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	50 µS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 1.5V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-20 ~ +70	1.25 ~ 50.0
±100PPM	-40 ~ +85	1.25 ~ 50.0
±50PPM	-20 ~ +70	1.25 ~ 50.0
±50PPM	-40 ~ +85	1.25 ~ 50.0
±25PPM	-20 ~ +70	1.25 ~ 50.0
±25PPM ³	-40 ~ +85	1.25 ~ 50.0

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, Vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

1.8V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_o)	1.25 ~ 133.0MHz
Temperature Range	
Storage (T_{STG})	-55°C ~ +125°C
Supply Voltage (V_{DD})	1.8V±5%
Input Current (I_{DD})	
1.25 ~ 10.0 MHz	2.5 mA
>10.0 ~ 20.0 MHz	3.5 mA
>20.0 ~ 30.0 MHz	4.0 mA
>30.0 ~ 40.0 MHz	4.5 mA
>40.0 ~ 60.0 MHz	6.0 mA
>60.0 ~ 100.0 MHz	10.0 mA
>100.0 ~ 133.0 MHz	20.0 mA
Standby Current	10µA
Output Symmetry (50% V_{DD})	
1.25 ~ 50.0 MHz	45 % ~ 55 %
>50.0 MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	10 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	10µA
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 1.8V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-10 ~ +70	1.25 ~ 133.0
±100PPM	-40 ~ +85	1.25 ~ 133.0
±50PPM	-10 ~ +70	1.25 ~ 133.0
±50PPM	-40 ~ +85	1.25 ~ 133.0
±25PPM	-10 ~ +70	1.25 ~ 133.0
±25PPM ³	-40 ~ +85	1.25 ~ 133.0

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, Vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

2.5V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_0)	1.25 ~ 170.0 MHz
Temperature Range	
Storage (T_{STG})	-55°C ~ +125°C
Supply Voltage (V_{DD})	2.5V±5%
Input Current (I_{DD})	
1.25 ~ 19.99999 MHz	5 mA
20.0 ~ 39.99999 MHz	9 mA
40.0 ~ 50.0 MHz	11 mA
>50.0MHz ~ 170MHz	30 mA
Standby Current	10µA
Output Symmetry (50% V_{DD})	
1.25 ~ 50.0 MHz	45 % ~ 55 %
>50.0 MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	10 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	200 µS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 80\%V_{DD}$	Active
'0' Level $V_{IL} \leq 20\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 1.5V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-20 ~ +70	1.25 ~ 170.0
±100PPM	-40 ~ +85	1.25 ~ 170.0
±50PPM	-20 ~ +70	1.25 ~ 170.0
±50PPM	-40 ~ +85	1.25 ~ 170.0
±25PPM	-20 ~ +70	1.25 ~ 170.0
±25PPM ³	-40 ~ +85	1.25 ~ 170.0

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, Vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

3.3V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_0)	1.00 ~ 170.0 MHz
Temperature Range	
Storage (T_{STG})	-55°C ~ +125°C
Supply Voltage (V_{DD})	3.3V±5%
Input Current (I_{DD})	
1.00 ~ 19.999999 MHz	7 mA
20.0 ~ 39.999999 MHz	13 mA
40.0 ~ 50.0 MHz	19 mA
>50.0 ~ 170MHz	40 mA
Standby Current (-20 to 70°C; -40 to 85°C)	10µA
(-40 to +105°C)	20µA
Output Symmetry (50% V_{DD})	
1.00 ~ 50.0 MHz	45 % ~ 55 %
>50.0 MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	10 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	200 µS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 80\%V_{DD}$	Active
'0' Level $V_{IL} \leq 20\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 3.3V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-20 ~ +70	1.00 ~ 170.0
±100PPM	-40 ~ +85	1.00 ~ 170.0
±100PPM	-40 ~ +105	2 ~ 50.0
±50PPM	-20 ~ +70	1.00 ~ 170.0
±50PPM	-40 ~ +85	1.00 ~ 170.0
±50PPM	-40 ~ +105	2 ~ 50.0
±25PPM	-20 ~ +70	1.00 ~ 170.0
±25PPM ³	-40 ~ +85	1.00 ~ 170.0

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, Vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

VARIABLE VOLTAGE ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_o)	0.75 ~ 156.25 MHz
Temperature Range	
Storage (T_{STG})	-55°C ~ +125°C
Supply Voltage (V_{DD})	
0.75 ~ 135.0 MHz	1.6V ~ 3.63V
>135.0 ~ 156.25 MHz	2.25V ~ 3.63V
Input Current (I_{DD})	
0.75 ~ 19.999 MHz	4 mA
20.0 ~ 39.999 MHz	6 mA
40.0 ~ 59.999 MHz	10 mA
60.0 ~ 84.999 MHz	15 mA
85.0 ~ 135.0 MHz	30 mA
>135.0 ~ 156.250 MHz	40 mA
Standby Current	
$T_{OPR} = -40 \sim +85^\circ\text{C}$	10 μA
$T_{OPR} = -40 \sim +105^\circ\text{C} / -40 \sim +125^\circ\text{C}$	20 μA
Output Symmetry (50% V_{DD})	
0.75 ~ 84.999 MHz	45 % ~ 55 %
85.0 ~ 156.25 MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	6 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	5 mS
Output Disable Time ¹	200nS
Output Enable Time ¹	5 mS

ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z


Available Options by Stability & Operating Temp For Variable Voltage		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-20 ~ +70	0.75 ~ 156.25
±100PPM	-40 ~ +85	0.75 ~ 156.25
±100PPM	-40 ~ +105	1.25 ~ 135.0
±100PPM	-40 ~ +125	1.25 ~ 135.0
±50PPM	-20 ~ +70	0.75 ~ 156.25
±50PPM	-40 ~ +85	0.75 ~ 156.25
±50PPM	-40 ~ +105	1.25 ~ 135.0
±50PPM	-40 ~ +125	1.25 ~ 135.0
±25PPM	-20 ~ +70	0.75 ~ 156.25
±25PPM ³	-40 ~ +85	0.75 ~ 156.25
±25PPM ³	-20 ~ +70	0.75 ~ 156.25

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open


² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, Vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

DIMENSIONS / MECHANICAL SPECIFICATIONS

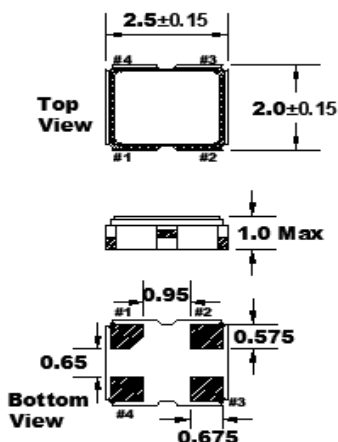

Recommended Solder Pad Layout



All dimensions are in millimeters.

Pin Connections

#1 E/D #3 Output
#2 GND #4 V_{DD}

Note:

1, A 0.01μF capacitor should be placed between V_{DD} (Pin 4) and G_{ND} (Pin2) to minimize power supply line noise.

2, Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary.

STANDARD SPECIFICATIONS

PARAMETERS	MAX (Unless otherwise noted)
Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	N/A
Termination Finish	Au (0.3~1μm) over Ni (1.27~8.89μm)
Seal Method	Seam
Lead (Pb) Free	Yes
RoHS Compliant	Yes, no exemptions
REACH Compliant (latest version)	Yes

TAPE SPECIFICATIONS (mm)						REEL SPECIFICATIONS (mm)							
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.55	4.0	4.0	3.5	8.0	1.15	-T3 = 3,000 -T2 = 2,000 -T1 = 1,000	2.0	ø13	ø21	ø60	ø180	9.0	2.0

Available Options & Part Identification*						
Sample PN: FO2HSBBM25.0-T3						
F	O2HS	B	B	M	25.0	-T3
Fox	Model Number	Voltage M = 1.0V±5% I = 1.5V±5% K = 1.8V±5% H = 2.5V±5% B = 3.3V±5% V = 1.6V to 3.63V W = 2.25V to 3.63V	Stability A = ±100 PPM B = ±50 PPM D = ±25 PPM E = ±20 PPM	Operating Temperature E = -10 to +70°C F = -20 to +70°C M = -40 to +85°C P = -40 to +105°C I = -40 to +125°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs T2 = 2,000 pcs T3 = 3,000 pcs

* Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps for each V_{DD}.

Reliability Test Conditions
Please contact Abracon Quality Assurance department

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[FO2HSBBM12.0-T3](#) [FO2HSKHE26.0-T3](#) [FO2HSBBM0.8-BULK](#) [FO2HSBBM1.0-T3](#) [FO2HSBBF25.0-T3](#)
[FO2HSBBF8.0-T3](#) [FO2HSBBM24.0-T3](#) [FO2HSBDF33.0-T3](#) [FO2HSCDM25.0-T1](#) [FO2HSKHE26.0-BULK](#)
[FO2HSBAM33.0-T3](#) [FO2HSCDM25.0-BULK](#) [FO2HSBAM14.31818-T3](#) [FO2HSBBF8.0-T1](#) [FO2HSBBM24.0-T1](#)
[FO2HSCDM25.0-T3](#) [FO2HSBBM0.8-T3](#) [FO2HSBBM12.0-T1](#) [FO2HSKBE26.0-T1](#) [FO2HSBBM27.12-T3](#)
[FO2HSKBM25.0-T3](#) [FO2HSBAM14.31818-T1](#) [FO2HSBAM33.0-T1](#) [FO2HSBBM25.0-T3](#) [FO2HSBBM50.0-T3](#)
[FO2HSKDM16.0-T1](#) [FO2HSBBM50.0-T1](#) [FO2HSKDE38.4-T1](#) [FO2HSKDE38.4-T3](#) [FO2HSKBE26.0-T3](#)
[FO2HSKBE8.0-T1](#) [FO2HSKBE8.0-T3](#) [FO2HSBBF19.2-T1](#) [FO2HSBBF19.2-T3](#) [FO2HSBBM27.12-T1](#)
[FO2HSKBM12.0-T3](#) [FO2HSKBM20.0-T1](#) [FO2HSCDM24.0-T3](#) [FO2HSBBM26.0-T3](#) [FO2HSBBM8.0-T3](#)
[FO2HSBAP16.0-T3](#) [FO2HSCDM37.4-T1](#) [FO2HSKBM20.0-T3](#) [FO2HSBBF50.0-T3](#) [FO2HSBBM10.0-T1](#)
[FO2HSBBM10.0-T3](#) [FO2HSBBM8.0-T1](#) [FO2HSBBP16.0-T3](#) [FO2HSBBF12.0-T3](#) [FO2HSBBF48.0-T3](#)
[FO2HSKDM26.0-T3](#) [FO2HSBBP25.0-T3](#) [FO2HSCDM37.4-BULK](#) [FO2HSKBM50.0-T3](#) [FO2HSKDM26.0-T1](#)
[FO2HSKDM27.0-T1](#) [FO2HSBBF40.0-T3](#) [FO2HSBBP25.0-BULK](#) [FO2HSCDM24.0-T1](#) [FO2HSKBM12.0-T1](#)
[FO2HSKBM50.0-T1](#) [FO2HSKBE24.0-T1](#) [FO2HSKDM40.0-T1](#) [FO2HSVBF24.0-T1](#) [FO2HSVBF24.0-T3](#)
[FO2HSBBF24.0-BULK](#) [FO2HSBBF24.0-T3](#) [FO2HSCDM8.0-T1](#) [FO2HSKDM25.0-T3](#) [FO2HSBBM26.0-T1](#)
[FO2HSBBP16.0-T1](#) [FO2HSKBE24.0-T3](#) [FO2HSCDM4.0-T1](#) [FO2HSCDM4.0-T3](#) [FO2HSKDM25.0-T1](#)
[FO2HSBBF16.0-T3](#) [FO2HSCDM8.0-T3](#) [FO2HSVDM25.0-BULK](#) [FO2HSKBM33.333-T1](#) [FO2HSKBM33.333-T3](#)
[FO2HSKBM16.368-T1](#) [FO2HSKBM16.368-T3](#) [FO2HSKBM22.1184-T1](#) [FO2HSKBM22.1184-T3](#) [FO2HSBBM33.333-T3](#)
[FO2HSBBM22.1184-T1](#) [FO2HSBBM22.1184-T3](#) [FO2HSBBM33.333-T1](#) [FO2HSBBM16.368-T1](#)
[FO2HSBBM16.368-T3](#) [FO2HSBBF25.0-T1](#) [FO2HSBBF12.0-T1](#) [FO2HSBBF16.0-T1](#) [FO2HSBBF48.0-T1](#)
[FO2HSBBF50.0-T1](#) [FO2HSBBF40.0-T1](#) [FO2HSBBF24.0-T1](#) [FO2HSBBM30.0-T1](#) [FO2HSBBM38.4-T1](#)
[FO2HSBBM4.0-T1](#)