

PRO-IS-237

Request Samples (>)



Check Inventory (>)



22.0 x 11.27 x 0.8mm **RoHS/RoHS II Compliant** MSL Level = 1


Features

- Compact 2.4GHz triangular antenna
- Thickness of 0.8 mm
- **Linear Polarization**
- High Gain of 3dBi
- Easy integration using cable and connector
- Customizable cable and Connector options

Applications

- Wi-Fi/BT/BLE/ZigBee/ISM
- IoT/ M2M
- Automation/ Smart Home
- Healthcare Devices
- Hand-free/ PC Peripherals
- Video and surveillance

Product Image

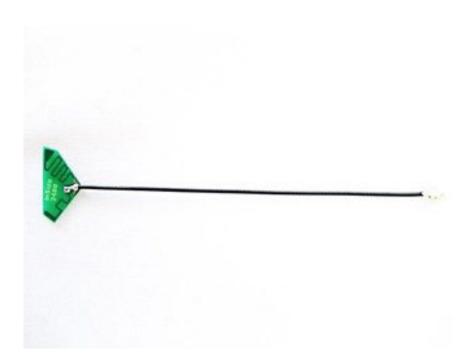





PRO-IS-237

Request Samples (>)



Check Inventory (>)



22.0 x 11.27 x 0.8mm RoHS/RoHS II Compliant MSL Level = 1

Electrical Specification

Parameter	Specification			Unit
	Min	Тур	Max	Omt
Operating Frequency	2400		2500	MHz
Return Loss			-4.5	dB
Polarization		Linear		
Peak Gain			3	dBi
Efficiency			34	%
Impedance		50		Ω

Mechanical Specification

Parameter	Specification		
Antenna Dimension	22 x 11.27 x 0.8 mm		
Cable Type	Coaxial		
Cable length	100 mm		
Connector Type	MHF-1 (F)		
Mounting Type	Adhesive		

Environmental Specification

Parameter	Specification
Operating Temperature	-40°C to +85°C
MSL Level	1
RoHS/RoHS II Compliant	Yes (Compliant with EU directive 2011/65/EU and 2015/863)





PRO-IS-237

Request Samples (>)




Check Inventory (>)




22.0 x 11.27 x 0.8mm **RoHS/RoHS II Compliant** MSL Level = 1

Product Dimensions

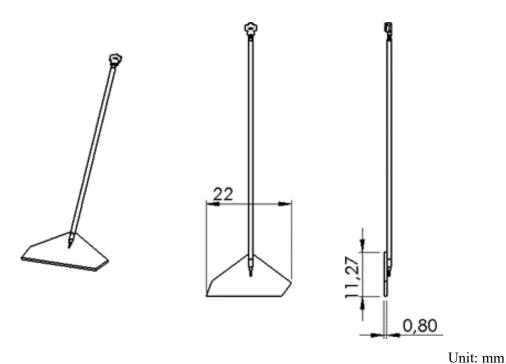

Measurement Setup

The antenna measurements were done on a standard measurement fixture - the antenna mounted in an ABS plastic box, 150x150x45 mm, connected to a PCB, 120x50 mm, with the cable fully extended

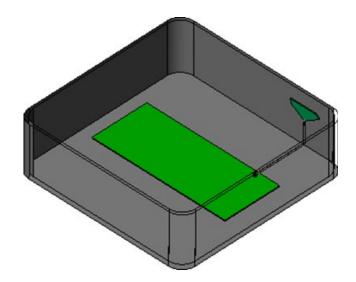



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-22-21

ABRACON IS ISO9001-2015 CERTIFIED



PRO-IS-237

Request Samples




Check Inventory (>)




22.0 x 11.27 x 0.8mm **RoHS/RoHS II Compliant** MSL Level = 1

Return Loss

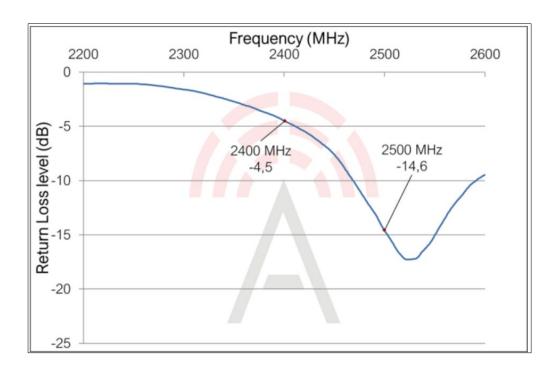

Total Radiation Efficiency

Maximum Radiation Gain

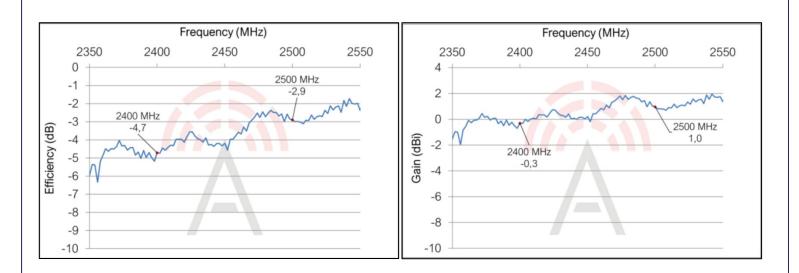





PRO-IS-237

Request Samples (>)





Check Inventory (>)





22.0 x 11.27 x 0.8mm **RoHS/RoHS II Compliant** MSL Level = 1


Radiation Characteristics - 2D Pattern (2.45 GHz)


















PRO-IS-237

Request Samples (>)



Check Inventory (>)



22.0 x 11.27 x 0.8mm **RoHS/RoHS II Compliant** MSL Level = 1

Packaging Information

Pieces per bag: 100 pieces

ATTENTION: Abracon LLC's products are COTS - Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-22-21

ABRACON IS ISO9001-2015 CERTIFIED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON: PRO-IS-237