




3.2x2.5mm C-Sine TCXO/VCTCXO

T3CN/T3CV
(former FOX923 Series)
DATASHEET


- Digital Temperature Compensation

ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (MHz)	8.0 ~ 40.000
Temperature Range Operating (T_{OPR}) Storage (T_{STG})	See table below -40°C ~ +85°C
Supply Voltage (V_{DD}) ($\pm 5\%$)	2.5V; 2.7V; 2.8V; 3.0V; 3.3V
Input Current (I_{DD})	2.0mA
Initial Frequency Tolerance @ 25°C (after reflow) (T3CV: $V_c = 0.5V_{DD}$) ¹	± 2.0 PPM
Frequency Stability Over Temperature Range Over Supply Voltage Change ($V_{DD} \pm 5\%$) Over Load Change [10k Ω /10pF] $\pm 10\%$	See table below ± 0.3 PPM ± 0.3 PPM
Output Voltage Level	0.8Vp-p min
Output Load	[10k Ω /10pF] $\pm 10\%$
Pullability (T3CV: $V_c = 0.5V_{DD} \pm 1.0V$) ¹	$\pm 3 \sim \pm 15$ PPM
Aging per year	± 1.0 PPM
Startup Time (T_s)	3.0mS
Phase Noise @ 1kHz offset	-130 dBc/Hz Typical
Reflow Soldering Temp	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Lead-Free	Yes
RoHS/REACH Compliant	Yes

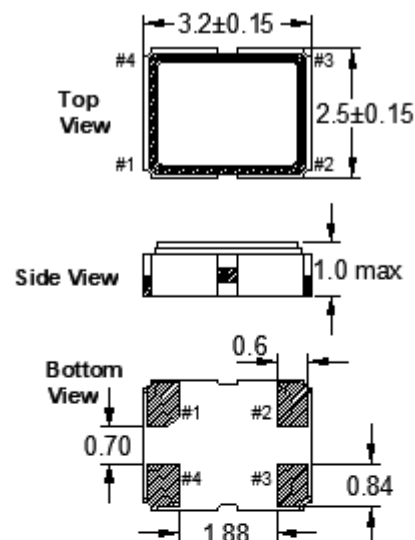

Recommended Solder Pad Layout

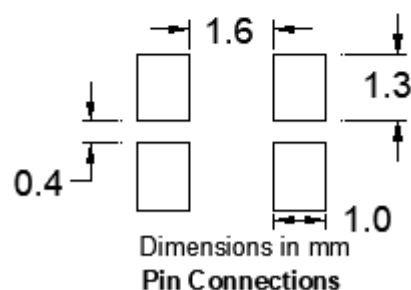

TCXO	VCTCXO
#1 GND #3 Out	#1 Vc #3 Out
#2 GND #4 VDD	#2 GND #4 VDD

Operating Temperature	± 1 PPM	± 1.5 PPM	± 2 PPM	± 2.5 PPM	± 15 PPM
-30 ~ +85°C	O	O	O	O	NA
-40 ~ +85°C	Δ	O	O	O	NA
-40 ~ +105°C	X	X	X	X	O

Key: O=Available, X=Not Available, NA=Not Applicable, Δ = Consult Fox Engineering

¹For proper operation, a control voltage (V_c) must be applied to pin 1 of VCTCXO's.

*Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary
All specifications subject to change without notice.






3.2x2.5mm C-Sine TCXO/VCTCXO

T3CN/T3CV
(former FOX923 Series)
DATASHEET

Tape Specifications (millimeters)							Reel Specifications (millimeters)						
A	B	C	D	E	F	Reel Qty	G	H	I	J	K	L	M
Ø1.5	4.0	4.0	3.5	8.0	1.4	-T3 = 3,000 -T2 = 2,000 -T1 = 1,000	2.0	Ø13	Ø21	Ø60	Ø180	9.0	1.5

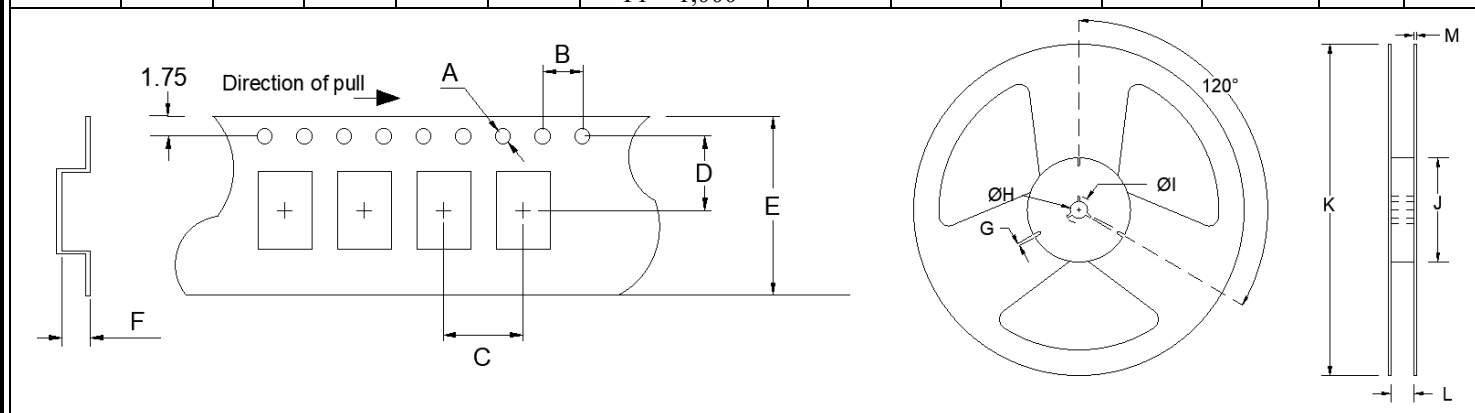

Available Options & Part Identification for TCXO Model T3CN/T3CV¹

F T3CN B P K 25.0

F	T3CN	B	P	K	25.0
FOX	Model Number T3CN = TCXO T3CV = VCTCXO	Voltage B = +3.3V±5% D = +3.0V±5% Q = +2.8V±5% S = +2.7V±5% H = +2.5V±5%	Stability T = ±1.0 PPM S = ±1.5 PPM R = ±2.0 PPM P = ±2.5 PPM F = ±15 PPM	Operating Temperature K = -30 to +85°C M = -40 to +85°C P = -40 to +105°C	Frequency (MHz)

¹ Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities/operating temp table.



Corporate Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369) or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

PRODUCT USE: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third-party owners.



Title / Description: T3CN/T3CV SERIES STANDARD SPECIFICATIONS			
Drawing Number: T3CN-T3CV-DOC-1		Size: A	
Part Number:		Cage: 61429	
Draftsperson: BEC	Approved: MAJ		Revision Date: 09/03/2019

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[FT3CNDLM24.0-1-T1](#)