


SPECIFICATIONS:	
NUMBER OF PHASES: 2	ROTOR INERTIA: 57 g-cm ² (0.31 oz-in ²) NOM
STEPS PER REVOLUTION: 200	INSULATION CLASS: B
STEP ANGLE: 1.8°	TEMP. RISE: 80 °C MAX.
STEP TO STEP ACCURACY: ±0.09° [1], [2]	OPERATING TEMP. RANGE: -20 TO +50 °C [9]
POSITIONAL ACCURACY: ± 5 % [1], [3]	STORAGE TEMP. RANGE: -30 TO +70 °C
AXIAL MOVEMENT: 0.1mm MAX (100N AXIAL FORCE)	RELATIVE HUMIDITY RANGE: 15 TO 85 %
BEARING SIZE: 19*10*5 mm	WEIGHT: 0.28 kg (0.62 lb)
SHAFT MATERIAL: SUS303	


[7]		[8]	[1]		[1]
SPECIFICATION CONNECTION	RESISTANCE PER PHASE (ohm ±10%)	INDUCTANCE PER PHASE (mH ±20%)	RATED CURRENT (amp)	HOLDING TORQUE (Nm MIN)	HOLDING TORQUE (oz-in Min)
BI-POLAR SERIES	1.04	2.73	2	0.45	63.7


NOTES, UNLESS OTHERWISE SPECIFIED:




- [1] MEASURMENTS MADE AT RATED CURRENT IN EACH PHASE.
- [2] BETWEEN ANY TWO ADJACENT FULL STEP POSITIONS.
- [3] MAXIMUM ERROR IN 360°.
- 4 HIPOT 500 VAC, 60 Hz FOR ONE MINUTE.
- [5] CONNECTOR: JSTS6B-PH-K(LF)(SN)
- 6 INSULATION RESISTANCE: 100 MEGOHMS MIN AT 500 VDC.
- [7] AS MEASURED ACROSS EACH PHASE.
- [8] AS MEASURED ACROSS EACH PHASE USING AN A.C. INDUCTANCE BRIDGE AT 1 KHz.
- [9] AS MEASURED BY THE CHANGE IN RESISTANCE METHOD, WITH RATED CURRENT APPLIED TO 2 PHASES; WITH MOTOR AT REST.
- 10 ROTOR & STATOR LAMINATED CONSTRUCTION.
- 11 THIS MOTOR IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EU RoHS DIRECTIVE.
- [12] MOTOR LABEL TO INCLUDE "ROHS" COMPLIANT, AMP P/N, 'MADE IN (COUNTRY OF ORIGIN)', AND DATE CODE.
- 13 HIGH TORQUE MOTOR DESIGN.

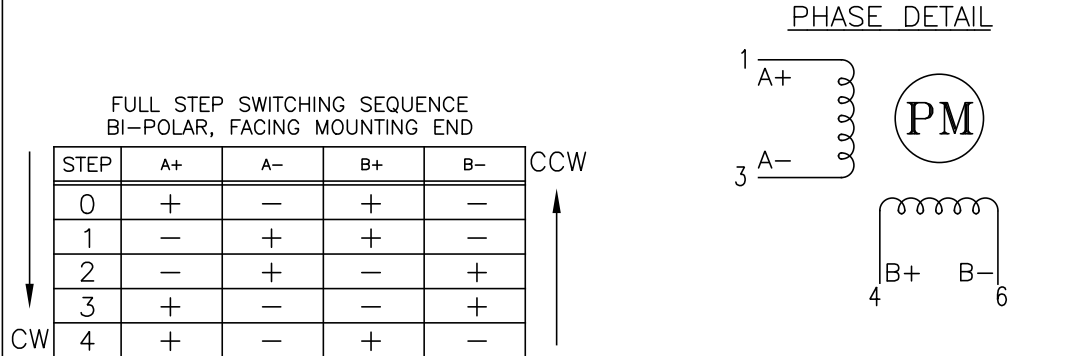



REVISIONS				
ECO NO.	REV	DESCRIPTION	DATE	APPROVED
7068	A	PRELIMINARY RELEASE	10/24/14	D.MACLEOD
7446	B	REVISE NOTE 11	6/6/16	J.KORDIK
8359	C	1ST ANGLE TO 3RD	10/31/19	J.KORDIK
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—



CONTRACT NO. —		 APPLIED MOTION PRODUCTS, INC.					
APPROVALS		DATE		STEP MOTOR OUTLINE			
DRAWN K.KESLER		10/31/19					
CHECKED R.JONEZ		10/31/19					
APPROVED J.KORDIK		10/31/19					
APPROVED —		—		B	COMPUTER DATA BASE DRAWING	DWG NO. HH17-101	REV C
				SCALE: NONE		SHEET 1 OF 2	

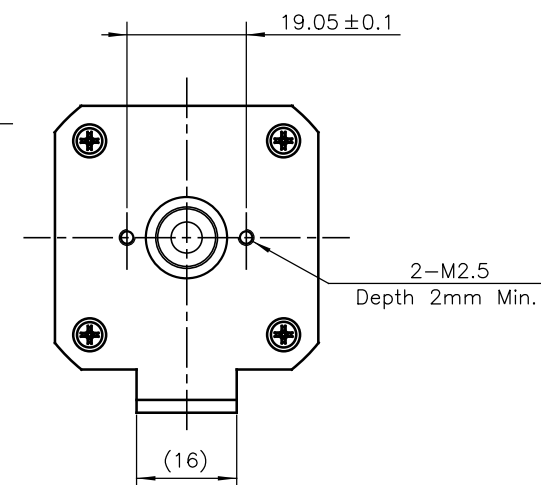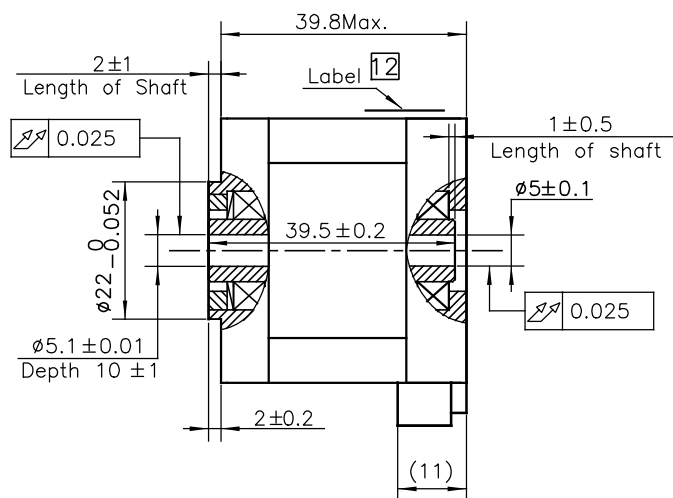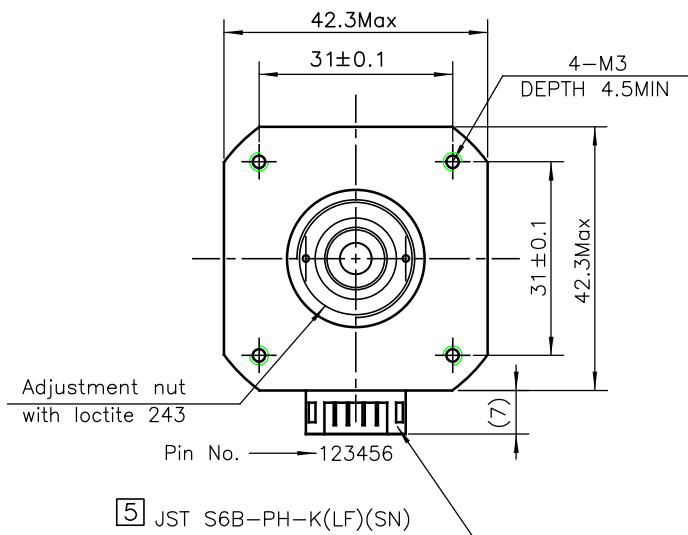

*ALL DIMENSIONS IN MM

TOLERANCES		THIRD ANGLE PROJECTION		 APPLIED MOTION PRODUCTS, INC.					
DECIMALS: MM X.XX = ±0.13 X.X = ±0.25 X = ±0.5 ANGLES: MACH. = ±0.5° CHAM. = ±5°									
COMPUTER DATA		APPROVALS		DATE		STEP MOTOR OUTLINE			
BASE DRAWING		DRAWN K.KESLER		10/31/19					
		CHECKED R.JONEZ		10/31/19					
		APPROVED —		—					
				B		DWG NO.	HH17-101	REV	C
				SCALE: NONE			SHEET 2 OF 2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Applied Motion:](#)

[HH17-101](#)