


MOTOR SPECIFICATIONS:					
NUMBER OF PHASES:	2	ROTOR INERTIA (g-cm ² /oz-in ²):	9/0.05 NOM		
STEPS PER REVOLUTION:	200	INSULATION CLASS:	B (130°C)		
STEP ANGLE (°):	1.8	BEARINGS:	ABEC 3, DOUBLE SHIELDED		
CONNECTION	RESISTANCE PER PHASE 5	INDUCTANCE PER PHASE 6	RATED CURRENT	HOLDING TORQUE 1	
	ohm ±10%	mH ±20%	AMP	mNm MIN	oz-in MIN
BI-POLAR	1.4	1.3	1.0	50	7.08

GEARMOTOR SPECIFICATIONS:				
TEMP. RISE (°C):	7	80 MAX	TOTAL WEIGHT (±10g/±0.35oz):	165/5.82
OPERATING AMB. TEMP. RANGE (°C):	-10 to +50		RELATIVE HUMIDITY RANGE (%):	85 NON-CONDENSING
STORAGE TEMP. RANGE (°C):	0 to +40			

GEARHEAD SPECIFICATIONS:			
RATIO:	14.29:1	EFFICIENCY (%):	81
MAX TORQUE CONTINUOUS (Nm/oz-in):	2/283.2	BACKLASH (°):	≤1.8
MAX TORQUE (Nm/oz-in):	3/424.8	MAX RADIAL LOAD (N/lbf):	≤20/4.49
MAX INPUT SPEED (RPM):	6000	MAX AXIAL LOAD (N/lbf):	≤20/4.49

REVISIONS				
ECO #	REV.	DESCRIPTION	DATE	APPROVED
7935	A	INITIAL RELEASE	7/2/18	J. KORDIK
8429	B	TYPO CORRECTION	3/3/20	J. KORDIK
8758	C	REDRAWN IN SOLIDWORKS	4/18/22	L. LIU

WIRING DIAGRAM

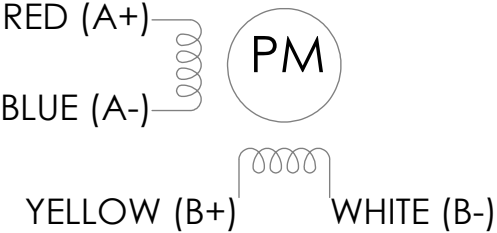


DRIVE SEQUENCE MODEL BI-POLAR FULL STEP

STEP	A+	A-	B+	B-
1	+	-	+	-
2	-	+	+	-
3	-	+	-	+
4	+	-	-	+
1	+	-	+	-

CW (CLOCKWISE) AND CCW (COUNTER-CLOCKWISE) ROTATION
WHEN SEEN FROM THE MOUNTING FACE END OF THE MOTOR

NOTES, UNLESS OTHERWISE SPECIFIED:

1. MEASUREMENTS MADE AT RATED CURRENT IN EACH PHASE.
2. HIPOT 500 VAC, 60Hz FOR ONE MINUTE.
3. LEADS: 4, 26 AWG, 7 STRAND MIN. UL AND CSA APPROVED. UL 1007.
4. INSULATION RESISTANCE: 100 MEGOHMS MIN AT 500 VDC.
5. AS MEASURED ACROSS EACH PHASE.
6. AS MEASURED ACROSS EACH PHASE USING AN A.C. INDUCTANCE BRIDGE AT 1KHz.
7. AS MEASURED BY THE CHANGE IN RESISTANCE METHOD, WITH RATED CURRENT APPLIED TO 2 PHASES; WITH MOTOR AT REST.
8. THIS MOTOR IS MANUFACTURED IN COMPLIANCE WITH CURRENT EU RoHS DIRECTIVE.
9. MOTOR LABEL TO INCLUDE AMP LOGO, AMP WEBSITE ADDRESS, "RoHS" COMPLIANCE LOGO, AMP P/N, 'MADE IN (COUNTRY)', AND DATE CODE.
10. ADD "D" TO PART NUMBER IF DOUBLE SHAFT IS REQUIRED.
DOUBLE SHAFT REQUIRES ADDED HOLES FOR ENCODER OPTION.

 <div>Applied Motion Products 4 MOONS COMPANY</div>	THIRD ANGLE PROJECTION		NAME	DATE	TITLE: STEPPER MOTOR W/ GEARHEAD		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: - ANGULAR: ± 0.5 - ONE DECIMAL PLACE: ± 0.25 - TWO DECIMAL PLACES: ± 0.13	DRAWN	Y. LAPNET	4/18/22			
		PRE.CHECK					
		PRE.APPROVAL					
			FIN.CHECK	C. BREUNINGER			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APPLIED MOTION PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APPLIED MOTION PRODUCTS IS PROHIBITED.	MATERIAL	SAP: 4611110060156			SIZE	DWG. NO.	REV
	FINISH	ALT DWG. NO.:			B	HT11-020-G014	C
	DO NOT SCALE DRAWING	ALT SAP:			SCALE: 2:1		SHEET 1 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Applied Motion:](#)

[HT11-020-G014](#)