

# MAC7100 Microcontroller Family Hardware Specifications

**Covers MAC7101, MAC7106, MAC7111, MAC7116, MAC7121, MAC7126, MAC7131, MAC7136, MAC7141<sup>1</sup>**

32-bit Embedded Controller Division

1. With preliminary information on MAC7112, MAC7122, MAC7142 devices.

This document provides electrical specifications, pin assignments, and package diagrams for MAC7100 family of microcontroller devices. For functional characteristics, refer to the *MAC7100 Microcontroller Family Reference Manual* (MAC7100RM).

## 1 Overview

The MAC7100 Family of microcontrollers (MCUs) are members of a pin-compatible family of 32-bit Flash-memory-based devices developed specifically for embedded automotive applications. The pin-compatible family concept enables users to select between different memory and peripheral options for scalable designs. All MAC7100 Family members are composed of a 32-bit ARM7TDMI-S™ central processing unit, up to 1 Mbyte of embedded Flash EEPROM for program storage, up to 32 Kbytes of embedded Flash for data and/or program storage, and up to 48 Kbytes of RAM. The family is implemented with an enhanced DMA (eDMA) controller to improve performance for transfers between memory and many of the on-chip peripherals. The peripheral set includes asynchronous serial communications interfaces (eSCI), serial peripheral interfaces (DSPI),

### Table of Contents

|      |                                                  |    |
|------|--------------------------------------------------|----|
| 1    | Overview .....                                   | 1  |
| 2    | Ordering Information .....                       | 2  |
| 3    | Electrical Characteristics .....                 | 4  |
| 3.1  | Parameter Classification .....                   | 4  |
| 3.2  | Absolute Maximum Ratings .....                   | 4  |
| 3.3  | ESD Protection and Latch-up Immunity .....       | 5  |
| 3.4  | Operating Conditions .....                       | 6  |
| 3.5  | Input/Output Characteristics .....               | 7  |
| 3.6  | Power Dissipation and Thermal Characteristics .. | 8  |
| 3.7  | Power Supply .....                               | 11 |
| 3.8  | Clock and Reset Generator .....                  | 15 |
| 3.9  | External Bus Timing .....                        | 20 |
| 3.10 | Analog-to-Digital Converter .....                | 24 |
| 3.11 | Serial Peripheral Interface .....                | 29 |
| 3.12 | FlexCAN Interface .....                          | 32 |
| 3.13 | Common Flash Module .....                        | 32 |
| 4    | Device Pin Assignments .....                     | 36 |
| 4.1  | MAC7141 Pin Diagram .....                        | 41 |
| 4.2  | MAC7142 Pin Diagram .....                        | 42 |
| 4.3  | MAC7121 / MAC7126 Pin Diagram .....              | 43 |
| 4.4  | MAC7122 Pin Diagram .....                        | 44 |
| 4.5  | MAC7101 / MAC7106 Pin Diagram .....              | 45 |
| 4.6  | MAC7111 / MAC7116 Pin Diagram .....              | 46 |
| 4.7  | MAC7112 Pin Diagram .....                        | 47 |
| 4.8  | MAC7131 Pin Diagram .....                        | 48 |
| 4.9  | MAC7136 Pin Diagram .....                        | 49 |
| 5    | Mechanical Information .....                     | 50 |
|      | Revision History .....                           | 51 |




## Ordering Information

inter-integrated circuit (I<sup>2</sup>C™) bus controllers, FlexCAN interfaces, an enhanced modular I/O subsystem (eMIOS), 10-bit analog-to-digital converter (ATD) module(s), general-purpose timers (PIT) and two special-purpose timers (RTI and SWT). The peripherals share a large number of general purpose input-output (GPIO) pins, all of which are bidirectional and available with interrupt capability to trigger wake-up from low-power chip modes. Refer to [Table 2](#) for a comparison of family members and availability of peripheral modules on each device.

The use of a PLL allows power drain and performance to be balanced to best fit requirements. The operating frequency of devices in the family is up to a maximum of 50 MHz. The internal data paths between the CPU core, eDMA, memory and peripherals are all 32 bits wide, further improving performance for 32-bit applications. The MAC7111, MAC7116, MAC7131 and MAC7136 also offer a 16-bit wide external data bus with 22 address lines. The family of devices is capable of operating over a junction temperature range of -40° C to 150° C.

## 2 Ordering Information

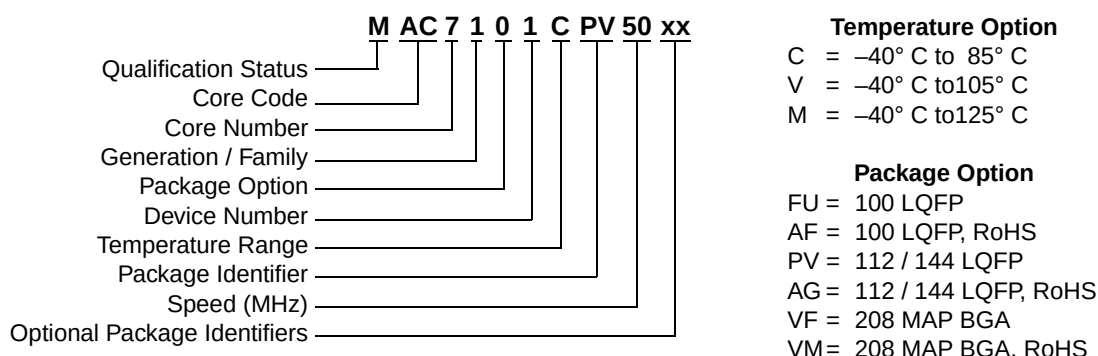

**Figure 1. Order Part Number Example**

The mask set of a device is marked with a four-character code consisting of a letter, two numerical digits, and a letter, for example L49P. Slight variations to the mask set identification code may result in an optional numerical digit preceding the standard four-character code, for example 0L49P.

**Table 1. MAC7100 Family Mask Set to Part Number Correspondence**

| Mask Set | Status                                | Part Number(s)                              |
|----------|---------------------------------------|---------------------------------------------|
| 0L49P    | Engineering samples                   | PAC7101, PAC7111, PAC7121, PAC7131, PAC7141 |
| 1L49P    | Limited production, pre-qualification | PAC7101, PAC7111, PAC7121, PAC7131, PAC7141 |
| 0L47W    | Limited production, pre-qualification | PAC7101, PAC7111, PAC7121, PAC7131, PAC7141 |
| 1L47W    | Fully-qualified, production           | MAC7101, MAC7111, MAC7121, MAC7131, MAC7141 |
| 0L61W    | Engineering samples                   | PAC7112, PAC7122, PAC7142                   |
| 0L38Y    | Engineering samples                   | PAC7106, PAC7116, PAC7126, PAC7136          |
| 1L38Y    | Fully-qualified, production           | MAC7106, MAC7116, MAC7126, MAC7136          |

Table 2. MAC7100 Family Device Derivatives

| Module Options                 |   | MAC7101             | MAC7111          | MAC7121          | MAC7131          | MAC7141         | MAC7112    | MAC7122          | MAC7142  | MAC7106   | MAC7116  | MAC7126          | MAC7136          |
|--------------------------------|---|---------------------|------------------|------------------|------------------|-----------------|------------|------------------|----------|-----------|----------|------------------|------------------|
| Program Flash                  |   | 512 KBytes          |                  |                  |                  |                 | 256 KBytes |                  |          | 1 MByte   |          |                  |                  |
| Data Flash                     |   | 32 KBytes           |                  |                  |                  |                 |            |                  |          |           |          |                  |                  |
| SRAM                           |   | 32 KBytes           |                  |                  |                  |                 | 16 KBytes  |                  |          | 48 KBytes |          |                  |                  |
| External Bus                   |   | —                   | Yes              | —                | Yes              | —               | —          | —                | —        | —         | Yes      | —                | Yes              |
| ATD Modules <sup>1</sup>       | A | Yes                 | Yes              | Yes              | Yes              | Yes             | Yes        | Yes              | Yes      | Yes       | Yes      | Yes              | Yes              |
|                                | B | Yes                 | —                | —                | Yes              | —               | —          | —                | —        | Yes       | —        | —                | Yes              |
| CAN Modules                    | A | Yes                 | Yes              | Yes              | Yes              | Yes             | Yes        | Yes              | Yes      | Yes       | Yes      | Yes              | Yes              |
|                                | B | Yes                 | Yes              | Yes              | Yes              | Yes             | Yes        | Yes              | Yes      | Yes       | Yes      | Yes              | Yes              |
|                                | C | Yes                 | Yes              | Yes              | Yes              | —               | —          | —                | —        | Yes       | Yes      | Yes              | Yes              |
|                                | D | Yes                 | Yes              | Yes              | Yes              | —               | —          | —                | —        | Yes       | Yes      | Yes              | Yes              |
| eSCI Modules                   | A | Yes                 | Yes              | Yes              | Yes              | Yes             | Yes        | Yes              | Yes      | Yes       | Yes      | Yes              | Yes              |
|                                | B | Yes                 | Yes              | Yes              | Yes              | Yes             | Yes        | Yes              | Yes      | Yes       | Yes      | Yes              | Yes              |
|                                | C | Yes                 | Yes              | Yes              | Yes              | —               | Yes        | Yes              | —        | Yes       | Yes      | Yes              | Yes              |
|                                | D | Yes                 | Yes              | Yes              | Yes              | Yes             | —          | —                | —        | Yes       | Yes      | Yes              | Yes              |
| DSPI Modules                   | A | Yes                 | Yes              | Yes              | Yes              | Yes             | Yes        | Yes              | Yes      | Yes       | Yes      | Yes              | Yes <sup>2</sup> |
|                                | B | Yes                 | Yes              | Yes <sup>3</sup> | Yes              | Yes             | Yes        | Yes <sup>3</sup> | Yes      | Yes       | Yes      | Yes <sup>3</sup> | Yes <sup>2</sup> |
| I <sup>2</sup> C Module        |   | Yes                 | Yes              | Yes              | Yes              | Yes             | Yes        | Yes              | Yes      | Yes       | Yes      | Yes              | Yes              |
| eMIOS Module                   |   | 16 channels, 16-bit |                  |                  |                  |                 |            |                  |          |           |          |                  |                  |
| Timer Module                   |   | 10 channels, 24-bit |                  |                  |                  |                 |            |                  |          |           |          |                  |                  |
| General-Purpose I/O Ports/Pins | A | 10                  | 16               | 10               | 16               | 4               | 16         | 10               | 4        | 10        | 16       | 10               | 16               |
|                                | B | 16                  | 16               | 15               | 16               | 16              | 16         | 15               | 16       | 16        | 16       | 15               | 16               |
|                                | C | 12                  | 16               | 1                | 16               | —               | 16         | 1                | —        | 12        | 16       | 1                | 16               |
|                                | D | 10 <sup>4</sup>     | 16 <sup>4</sup>  | 11 <sup>4</sup>  | 16 <sup>4</sup>  | 10 <sup>4</sup> | 16         | 11               | 10       | 10        | 16       | 11               | 16               |
|                                | E | 16                  | 16               | 16               | 16               | 16              | 16         | 16               | 16       | 16        | 16       | 16               | 16               |
|                                | F | 16                  | 16               | 16               | 16               | 16              | 16         | 16               | 16       | 16        | 16       | 16               | 16               |
|                                | G | 16                  | 16               | 16               | 16               | 10              | 16         | 16               | 10       | 16        | 16       | 16               | 16               |
|                                | H | 16                  | —                | —                | 16               | —               | —          | —                | —        | 16        | —        | —                | 16               |
|                                | I | —                   | —                | —                | —                | —               | —          | —                | —        | —         | —        | —                | 16               |
| Total (max.)                   |   | 112 <sup>4</sup>    | 112 <sup>4</sup> | 85 <sup>4</sup>  | 128 <sup>4</sup> | 72 <sup>4</sup> | 112        | 85               | 72       | 112       | 112      | 85               | 144              |
| Package                        |   | 144 LQFP            | 144 LQFP         | 112 LQFP         | 208 BGA          | 100 LQFP        | 144 LQFP   | 112 LQFP         | 100 LQFP | 144 LQFP  | 144 LQFP | 112 LQFP         | 208 BGA          |

## NOTES:

- 16 channels, 8/10-bit, per module.
- Four additional chip selects available.
- PB11 / PCS2\_B not available on non-L49P-mask devices; PB10 / PCS5\_B / PCSS\_B not available on mask L47W devices.
- Reduce these values by one for mask set L49P devices (PD2 is not available for general-purpose use).

## 3 Electrical Characteristics

This section contains electrical information for MAC7100 Family microcontrollers. The information is preliminary and subject to change without notice.

MAC7100 Family devices are specified and tested over the 5 V and 3.3 V ranges. For operation at any voltage within that range, the 3.3 V specifications generally apply. However, no production testing is done to verify operation at intermediate supply voltage levels.

### 3.1 Parameter Classification

The electrical parameters shown in this appendix are derived by various methods. To provide a better understanding to the designer, the following classification is used. Parameters are tagged accordingly in the column labeled “C” of the parametric tables, as appropriate.

**Table 3. Parametric Value Classification**

|   |                                                                                                                                                                                                                                            |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| P | Parameters guaranteed during production testing on each individual device.                                                                                                                                                                 |
| C | Parameters derived by the design characterization and by measuring a statistically relevant sample size across process variations.                                                                                                         |
| T | Parameters derived by design characterization on a small sample size from typical devices under typical conditions (unless otherwise noted). All values shown in the typical column are within this classification, even if not so tagged. |
| D | Parameters derived mainly from simulations.                                                                                                                                                                                                |

### 3.2 Absolute Maximum Ratings

Absolute maximum ratings are stress ratings only. Functional operation outside these maximums is not guaranteed. Stress beyond these limits may affect reliability or cause permanent damage to the device.

MAC7100 Family devices contain circuitry protecting against damage due to high static voltage or electrical fields; however, it is advised that normal precautions be taken to avoid application of any voltages higher than maximum-rated voltages to this high-impedance circuit. Reliability of operation is enhanced if unused inputs are tied to an appropriate logic voltage level (for example, either  $V_{SS}^5$  or  $V_{DD}^5$ ).

**Table 4. Absolute Maximum Ratings**

| Num | Rating                                    | Symbol            | Min  | Max  | Unit |
|-----|-------------------------------------------|-------------------|------|------|------|
| A1a | I/O Drivers Supply Voltage                | $V_{DDX}$         | −0.3 | +6.0 | V    |
| A2  | Digital Logic Supply Voltage <sup>1</sup> | $V_{DD2.5}$       | −0.3 | +3.0 | V    |
| A3  | PLL Supply Voltage <sup>1</sup>           | $V_{DDPLL}$       | −0.3 | +3.0 | V    |
| A4  | Analog Supply Voltage                     | $V_{DDA}$         | −0.3 | +6.0 | V    |
| A5  | Analog Reference                          | $V_{RH}, V_{RL}$  | −0.3 | +6.0 | V    |
| A6  | Voltage difference $V_{DDX}$ to $V_{DDA}$ | $\Delta V_{DDX}$  | −0.3 | +0.3 | V    |
| A7  | Voltage difference $V_{SSX}$ to $V_{SSA}$ | $\Delta V_{SSX}$  | −0.3 | +0.3 | V    |
| A8  | Voltage difference $V_{RH} - V_{RL}$      | $V_{RH} - V_{RL}$ | −0.3 | +6.0 | V    |

1. Refer to [Section 3.7, “Power Supply,”](#) for definition of  $V_{SS}^5$  and  $V_{DD}^5$ .

Table 4. Absolute Maximum Ratings (continued)

| Num | Rating                                                  | Symbol             | Min   | Max            | Unit |
|-----|---------------------------------------------------------|--------------------|-------|----------------|------|
| A9  | Voltage difference $V_{DDA} - V_{RH}$                   | $V_{DDA} - V_{RH}$ | -0.3  | +6.0           | V    |
| A10 | Digital I/O Input Voltage                               | $V_{IN}$           | -0.3  | +6.0           | V    |
| A11 | XFC, EXTAL, XTAL inputs                                 | $V_{ILV}$          | -0.3  | +3.0           | V    |
| A12 | TEST input                                              | $V_{TEST}$         | -0.3  | — <sup>2</sup> | V    |
|     | Instantaneous Maximum Current <sup>3</sup>              |                    |       |                |      |
| A13 | Single pin limit for XFC, EXTAL, XTAL <sup>4</sup>      | $I_{DL}$           | -25   | +25            | mA   |
| A14 | Single pin limit for all digital I/O pins <sup>5</sup>  | $I_D$              | -25   | +25            | mA   |
| A15 | Single pin limit for all analog input pins <sup>5</sup> | $I_{DA}$           | -25   | +25            | mA   |
| A16 | Single pin limit for TEST <sup>2</sup>                  | $I_{DT}$           | -0.25 | 0              | mA   |
| A17 | Storage Temperature Range                               | $T_{stg}$          | -65   | +155           | °C   |

## NOTES:

1. The device contains an internal voltage regulator to generate the logic and PLL supply from the I/O supply. The absolute maximum ratings apply when the device is powered from an external source.
2. This pin is clamped low to  $V_{SSX}$ , but not clamped high, and must be tied low in applications.
3. Input must be current limited to the value specified. To determine the value of the required current-limiting resistor, use the larger of the calculated values using  $V_{POSCLAMP} = V_{DDA} + 0.3V$  and  $V_{NEGCLAMP} = -0.3V$ .
4. These pins are internally clamped to  $V_{SSPLL}$  and  $V_{DDPLL}$ .
5. All I/O pins are internally clamped to  $V_{SSX}$  and  $V_{DDX}$ ,  $V_{SSR}$  and  $V_{DDR}$  or  $V_{SSA}$  and  $V_{DDA}$ .

### 3.3 ESD Protection and Latch-up Immunity

All ESD testing is in conformity with CDF-AEC-Q100 Stress test qualification for Automotive Grade Integrated Circuits. During the device qualification ESD stresses were performed for the Human Body Model (HBM), the Machine Model (MM) and the Charge Device Model.

A device is defined as a failure if after exposure to ESD pulses the device no longer meets the device specification. Complete DC parametric and functional testing is performed per the applicable device specification at room temperature followed by hot temperature, unless specified otherwise.

Table 5. ESD and Latch-up Test Conditions

| Model      | Description                                      | Symbol      | Value       | Unit |
|------------|--------------------------------------------------|-------------|-------------|------|
| Human Body | Series Resistance                                | R1          | 1500        | Ohm  |
|            | Storage Capacitance                              | C           | 100         | pF   |
|            | Number of Pulses per pin<br>positive<br>negative | —<br>3<br>3 | —<br>3<br>3 |      |
| Machine    | Series Resistance                                | R1          | 0           | Ohm  |
|            | Storage Capacitance                              | C           | 200         | pF   |
|            | Number of Pulse per pin<br>positive<br>negative  | —<br>3<br>3 | —<br>3<br>3 |      |
| Latch-up   | Minimum input voltage limit                      |             | -2.5        | V    |
|            | Maximum input voltage limit                      |             | 7.5         | V    |

Table 6. ESD and Latch-Up Protection Characteristics

| Num | C | Rating                                                                | Symbol    | Min          | Max | Unit |
|-----|---|-----------------------------------------------------------------------|-----------|--------------|-----|------|
| B1  | C | Human Body Model (HBM)                                                | $V_{HBM}$ | 2000         | —   | V    |
| B2  | C | Machine Model (MM)                                                    | $V_{MM}$  | 200          | —   | V    |
| B3  | C | Charge Device Model (CDM)                                             | $V_{CDM}$ | 500          | —   | V    |
| B4  | C | Latch-up Current at $T_A = 125^\circ\text{C}$<br>positive<br>negative | $I_{LAT}$ | +100<br>-100 | —   | mA   |
| B5  | C | Latch-up Current at $T_A = 27^\circ\text{C}$<br>positive<br>negative  | $I_{LAT}$ | +200<br>-200 | —   | mA   |

## 3.4 Operating Conditions

Unless otherwise noted, the following conditions apply to all parametric data. Refer to the temperature rating of the device (C, V, M) with respect to ambient temperature ( $T_A$ ) and junction temperature ( $T_J$ ). For power dissipation calculations refer to [Section 3.6, “Power Dissipation and Thermal Characteristics.”](#)

Table 7. MAC7100 Family Device Operating Conditions

| Num  | Rating                                                     | Symbol                 | Min  | Typ | Max  | Unit             |
|------|------------------------------------------------------------|------------------------|------|-----|------|------------------|
| C1   | I/O Drivers Supply Voltage                                 | $V_{DDX}$              | 3.15 | 5   | 5.5  | V                |
| C2   | Digital Logic Supply Voltage <sup>1</sup>                  | $V_{DD2.5}$            | 2.35 | 2.5 | 2.75 | V                |
| C3   | PLL Supply Voltage <sup>1</sup>                            | $V_{DDPLL}$            | 2.35 | 2.5 | 2.75 | V                |
| C4   | Analog Supply Voltage                                      | $V_{DDA}$              | 3.15 | 5   | 5.5  | V                |
| C5   | Voltage Difference $V_{DDX}$ to $V_{DDA}$                  | $\Delta V_{DDX}$       | -0.1 | 0   | 0.1  | V                |
| C6   | Voltage Difference $V_{SSX}$ to $V_{SSA}$                  | $\Delta V_{SSX}$       | -0.1 | 0   | 0.1  | V                |
| C7   | Oscillator Frequency                                       | $f_{OSC}$ <sup>2</sup> | 0.5  | —   | 16   | MHz              |
| C8   | System Clock Frequency                                     | $f_{SYS}$ <sup>2</sup> | 0.5  | —   | 50   | MHz              |
| C9a  | MAC71xxC Operating Junction Temperature Range <sup>3</sup> | $T_J$                  | -40  | —   | 110  | $^\circ\text{C}$ |
| C9b  | Operating Ambient Temperature Range <sup>3</sup>           | $T_A$                  | -40  | 25  | 85   | $^\circ\text{C}$ |
| C10a | MAC71xxV Operating Junction Temperature Range <sup>3</sup> | $T_J$                  | -40  | —   | 130  | $^\circ\text{C}$ |
| C10b | Operating Ambient Temperature Range <sup>3</sup>           | $T_A$                  | -40  | 25  | 105  | $^\circ\text{C}$ |
| C11a | MAC71xxM Operating Junction Temperature Range <sup>3</sup> | $T_J$                  | -40  | —   | 150  | $^\circ\text{C}$ |
| C11b | Operating Ambient Temperature Range <sup>3</sup>           | $T_A$                  | -40  | 25  | 125  | $^\circ\text{C}$ |

NOTES:

- These ratings apply only when the VREG is disabled and the device is powered from an external source.
- Throughout this document,  $t_{OSC}$  refers to  $1 \div f_{OSC}$ , and  $t_{SYS}$  refers to  $1 \div f_{SYS}$ .
- Refer to [Section 3.6, “Power Dissipation and Thermal Characteristics,”](#) for more details about the relation between ambient temperature  $T_A$  and device junction temperature  $T_J$ .

### 3.4.1 Input/Output Pins

The I/O pins operate at a nominal level of 3.3 V to 5 V. This class of pins is comprised of the clocks, control and general purpose/peripheral pins. The internal structure of these pins is identical; however, some functionality may be disabled (for example, for analog inputs the output drivers, pull-up/down resistors are permanently disabled).

### 3.4.2 Oscillator Pins

The pins XFC, EXTAL, XTAL are dedicated to the oscillator and operate at a nominal level of 2.5V.

## 3.5 Input/Output Characteristics

This section describes the characteristics of all I/O pins in both 3.3 V and 5 V operating conditions. All parameters are not always applicable; for example, not all pins feature pull up/down resistances.

**Table 8. 5.0 V I/O Characteristics**

| Conditions shown in Table 7 unless otherwise noted |   |                                                                                                           |                        |                         |     |                         |         |
|----------------------------------------------------|---|-----------------------------------------------------------------------------------------------------------|------------------------|-------------------------|-----|-------------------------|---------|
| Num                                                | C | Rating                                                                                                    | Symbol                 | Min                     | Typ | Max                     | Unit    |
| D1a                                                | P | Input High Voltage                                                                                        | $V_{IH}$               | $0.65 \times V_{DD5}^1$ | —   | —                       | V       |
| D1b                                                | T | Input High Voltage                                                                                        | $V_{IH}$               | —                       | —   | $V_{DD5} + 0.3^1$       | V       |
| D2a                                                | P | Input Low Voltage                                                                                         | $V_{IL}$               | —                       | —   | $0.35 \times V_{DD5}^1$ | V       |
| D2b                                                | T | Input Low Voltage                                                                                         | $V_{IL}$               | $V_{SS5} - 0.3^1$       | —   | —                       | V       |
| D3                                                 | C | Input Hysteresis                                                                                          | $V_{HYS}$              | —                       | 250 | —                       | mV      |
| D4                                                 | P | Input Leakage Current (pins in high impedance input mode)<br>$V_{in} = V_{DD5}$ or $V_{SS5}^1$            | $I_{in}$               | $-1^2$                  | —   | $1^2$                   | $\mu A$ |
| D5                                                 | P | Output High Voltage (pins in output mode)<br>Partial Drive $I_{OH} = -2mA$<br>Full Drive $I_{OH} = -10mA$ | $V_{OH}$               | $V_{DD5} - 0.8$         | —   | —                       | V       |
| D6                                                 | P | Output Low Voltage (pins in output mode)<br>Partial Drive $I_{OL} = +2mA$<br>Full Drive $I_{OL} = +10mA$  | $V_{OL}$               | —                       | —   | 0.8                     | V       |
| D7                                                 | P | Internal Pull Up Device Current, tested at $V_{IL}$ Max.                                                  | $I_{PUL}$              | —                       | —   | -130                    | $\mu A$ |
| D8                                                 | P | Internal Pull Up Device Current, tested at $V_{IH}$ Min.                                                  | $I_{PUH}$              | -10                     | —   | —                       | $\mu A$ |
| D9                                                 | P | Internal Pull Down Device Current, tested at $V_{IH}$ Min.                                                | $I_{PDH}$              | —                       | —   | 130                     | $\mu A$ |
| D10                                                | P | Internal Pull Down Device Current, tested at $V_{IL}$ Max.                                                | $I_{PDL}$              | 10                      | —   | —                       | $\mu A$ |
| D11                                                | D | Input Capacitance                                                                                         | $C_{in}$               | —                       | 6   | —                       | pF      |
| D12                                                | T | Injection current <sup>3</sup><br>Single Pin limit<br>Total Device Limit. Sum of all injected currents    | $I_{ICS}$<br>$I_{ICP}$ | -2.5<br>-25             | —   | 2.5<br>25               | mA      |
| D13                                                | P | Port Interrupt Input Pulse filtered <sup>4</sup>                                                          | $t_{PULSE}$            | —                       | —   | 3                       | $\mu s$ |
| D14                                                | P | Port Interrupt Input Pulse passed <sup>4</sup>                                                            | $t_{PULSE}$            | 10                      | —   | —                       | $\mu s$ |

**NOTES:**

1. Refer to Section 3.7, "Power Supply," for definition of  $V_{SS5}$  and  $V_{DD5}$ .
2. Maximum leakage current occurs at maximum operating temperature. Current decreases by approximately one-half for each 8°C to 12°C in the temperature range from 50°C to 125°C.
3. Refer to Section 3.7.1, "Current Injection," for more details
4. Parameter only applies in STOP or Pseudo STOP mode.

Table 9. 3.3 V I/O Characteristics

| Conditions shown in Table 7, with $V_{DDX} = 3.3\text{ V} -5\%/+10\%$ and a temperature maximum of $+140^{\circ}\text{C}$ unless otherwise noted. |   |                                                                                                                             |                        |                         |     |                         |               |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---|-----------------------------------------------------------------------------------------------------------------------------|------------------------|-------------------------|-----|-------------------------|---------------|
| Num                                                                                                                                               | C | Rating                                                                                                                      | Symbol                 | Min                     | Typ | Max                     | Unit          |
| E1a                                                                                                                                               | P | Input High Voltage                                                                                                          | $V_{IH}$               | $0.65 \times V_{DD5}^1$ | —   | —                       | V             |
| E1b                                                                                                                                               | T | Input High Voltage                                                                                                          | $V_{IH}$               | —                       | —   | $V_{DD5}^1 + 0.3^1$     | V             |
| E2a                                                                                                                                               | P | Input Low Voltage                                                                                                           | $V_{IL}$               | —                       | —   | $0.35 \times V_{DD5}^1$ | V             |
| E2b                                                                                                                                               | T | Input Low Voltage                                                                                                           | $V_{IL}$               | $V_{SS5} - 0.3^1$       | —   | —                       | V             |
| E3                                                                                                                                                | C | Input Hysteresis                                                                                                            | $V_{HYS}$              | —                       | 250 | —                       | mV            |
| E4                                                                                                                                                | P | Input Leakage Current (pins in high impedance input mode)<br>$V_{in} = V_{DD5}$ or $V_{SS5}^1$                              | $I_{in}$               | $-1^2$                  | —   | $1^2$                   | $\mu\text{A}$ |
| E5                                                                                                                                                | P | Output High Voltage (pins in output mode)<br>Partial Drive $I_{OH} = -0.75\text{mA}$<br>Full Drive $I_{OH} = -4.5\text{mA}$ | $V_{OH}$               | $V_{DD5} - 0.4$         | —   | —                       | V             |
| E6                                                                                                                                                | P | Output Low Voltage (pins in output mode)<br>Partial Drive $I_{OL} = +0.9\text{mA}$<br>Full Drive $I_{OL} = +5.5\text{mA}$   | $V_{OL}$               | —                       | —   | 0.4                     | V             |
| E7                                                                                                                                                | P | Internal Pull Up Device Current, tested at $V_{IL}$ Max.                                                                    | $I_{PUL}$              | —                       | —   | -60                     | $\mu\text{A}$ |
| E8                                                                                                                                                | P | Internal Pull Up Device Current, tested at $V_{IH}$ Min.                                                                    | $I_{PUH}$              | -6                      | —   | —                       | $\mu\text{A}$ |
| E9                                                                                                                                                | P | Internal Pull Down Device Current, tested at $V_{IH}$ Min.                                                                  | $I_{PDH}$              | —                       | —   | 60                      | $\mu\text{A}$ |
| E10                                                                                                                                               | P | Internal Pull Down Device Current, tested at $V_{IL}$ Max.                                                                  | $I_{PDL}$              | 6                       | —   | —                       | $\mu\text{A}$ |
| E11                                                                                                                                               | D | Input Capacitance                                                                                                           | $C_{in}$               | —                       | 6   | —                       | pF            |
| E12                                                                                                                                               | T | Injection current <sup>3</sup><br>Single Pin limit<br>Total Device Limit. Sum of all injected currents                      | $I_{ICS}$<br>$I_{ICP}$ | -2.5<br>-25             | —   | 2.5<br>25               | mA            |
| E13                                                                                                                                               | P | Port Interrupt Input Pulse filtered <sup>4</sup>                                                                            | $t_{PULSE}$            | —                       | —   | 3                       | $\mu\text{s}$ |
| E14                                                                                                                                               | P | Port Interrupt Input Pulse passed <sup>4</sup>                                                                              | $t_{PULSE}$            | 10                      | —   | —                       | $\mu\text{s}$ |

## NOTES:

1. Refer to Section 3.7, "Power Supply," for definition of  $V_{SS5}$  and  $V_{DD5}$ .
2. Maximum leakage current occurs at maximum operating temperature. Current decreases by approximately one-half for each  $8^{\circ}\text{C}$  to  $12^{\circ}\text{C}$  in the temperature range from  $50^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .
3. Refer to Section 3.7.1, "Current Injection," for more details
4. Parameter only applies in STOP or Pseudo STOP mode.

## 3.6 Power Dissipation and Thermal Characteristics

Power dissipation and thermal characteristics are closely related. The user must assure that the maximum operating junction temperature is not exceeded.



Note that the JEDEC specification reserves the symbol  $R_{\theta JA}$  or  $\theta_{JA}$  (Theta-JA) strictly for junction-to-ambient thermal resistance on a 1s test board in natural convection environment.  $R_{\theta JMA}$  or  $\theta_{JMA}$  (Theta-JMA) will be used for both junction-to-ambient on a 2s2p test board in natural convection and for junction-to-ambient with forced convection on both 1s and 2s2p test boards. It is anticipated that the generic name,  $\theta_{JA}$ , will continue to be commonly used.

The average chip-junction temperature ( $T_J$ ) in °C is obtained from the formula:

$$T_J = T_A + P_D \cdot \theta_{JA} \quad \text{Eqn. 1}$$

where

$T_J$  = Junction Temperature (°C)  
 $T_A$  = Ambient Temperature (°C)  
 $P_D$  = Total Chip Power Dissipation (W)  
 $\theta_{JA}$  = Package Thermal Resistance (°C/W)

The total power dissipation is calculated as:

$$P_D = P_{INT} + P_{IO} \quad \text{Eqn. 2}$$

where

$P_{INT}$  = Chip Internal Power Dissipation (W)  
 $P_{IO}$  = Input / Output Power Dissipation (W)

Two cases must be considered for  $P_{INT}$ :

1. Internal voltage regulator enabled:

$$P_{INT} = (I_{DD}R \times V_{DD}R) + (I_{DD}A \times V_{DD}A) \quad \text{Eqn. 3}$$

2. Internal voltage regulator disabled ( $V_{DD}R = V_{SS}R = \text{system ground}$ ):

$$P_{INT} = (I_{DD}2.5 \times V_{DD}2.5) + (I_{DD}PLL \times V_{DD}PLL) + (I_{DD}A \times V_{DD}A) \quad \text{Eqn. 4}$$

$P_{IO}$  is the sum of all output currents on input/output pins associated with  $V_{DD}X$ :

$$P_{IO} = \sum_i R_{DSON} \cdot (I_{IO_i})^2 \quad \text{Eqn. 5}$$

where

$$R_{DSON} = \frac{V_{OL}}{I_{OL}} \quad (\text{for outputs driven low}) \quad \text{Eqn. 6}$$

or

$$R_{DSON} = \frac{V_{DD}X - V_{OH}}{I_{OL}} \quad (\text{for outputs driven high}) \quad \text{Eqn. 7}$$

**Table 10. Thermal Resistance 1/8 Simulation Model Packaging Parameters**

| Component          | Conductivity |
|--------------------|--------------|
| Mold Compound      | 0.9 W/m K    |
| Leadframe (Copper) | 263 W/m K    |
| Die Attach         | 1.7 W/m K    |

### 3.6.1 Thermal Resistance Simulation Details

**Table 11. Thermal Resistance for Case Outline 983–02, 100 Lead 14x14 mm LQFP, 0.5 mm Pitch**

| Rating                                   | Environment             | Symbol            | Value | Unit | Comments |
|------------------------------------------|-------------------------|-------------------|-------|------|----------|
| Junction to Ambient (Natural Convection) | Single layer board (1s) | R <sub>θJA</sub>  | 44    | °C/W | 1, 2     |
| Junction to Ambient (Natural Convection) | Four layer board (2s2p) | R <sub>θJMA</sub> | 34    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Single layer board (1s) | R <sub>θJMA</sub> | 37    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Four layer board (2s2p) | R <sub>θJMA</sub> | 29    | °C/W | 1, 3     |
| Junction to Board                        |                         | R <sub>θJB</sub>  | 18    | °C/W | 4        |
| Junction to Case                         |                         | R <sub>θJC</sub>  | 7     | °C/W | 5        |
| Junction to Package Top                  | Natural Convection      | Ψ <sub>JT</sub>   | 2     | °C/W | 6        |

**Table 12. Thermal Resistance for Case Outline 987–01, 112 Lead 20x20 mm LQFP, 0.65 mm Pitch**

| Rating                                   | Environment             | Symbol            | Value | Unit | Comments |
|------------------------------------------|-------------------------|-------------------|-------|------|----------|
| Junction to Ambient (Natural Convection) | Single layer board (1s) | R <sub>θJA</sub>  | 42    | °C/W | 1, 2     |
| Junction to Ambient (Natural Convection) | Four layer board (2s2p) | R <sub>θJMA</sub> | 34    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Single layer board (1s) | R <sub>θJMA</sub> | 35    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Four layer board (2s2p) | R <sub>θJMA</sub> | 30    | °C/W | 1, 3     |
| Junction to Board                        |                         | R <sub>θJB</sub>  | 22    | °C/W | 4        |
| Junction to Case                         |                         | R <sub>θJC</sub>  | 7     | °C/W | 5        |
| Junction to Package Top                  | Natural Convection      | Ψ <sub>JT</sub>   | 2     | °C/W | 6        |

**Table 13. Thermal Resistance for Case Outline 918–03, 144 Lead 20x20 mm LQFP, 0.5 mm Pitch**

| Rating                                   | Environment             | Symbol            | Value | Unit | Comments |
|------------------------------------------|-------------------------|-------------------|-------|------|----------|
| Junction to Ambient (Natural Convection) | Single layer board (1s) | R <sub>θJA</sub>  | 42    | °C/W | 1, 2     |
| Junction to Ambient (Natural Convection) | Four layer board (2s2p) | R <sub>θJMA</sub> | 34    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Single layer board (1s) | R <sub>θJMA</sub> | 35    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Four layer board (2s2p) | R <sub>θJMA</sub> | 30    | °C/W | 1, 3     |
| Junction to Board                        |                         | R <sub>θJB</sub>  | 22    | °C/W | 4        |
| Junction to Case                         |                         | R <sub>θJC</sub>  | 7     | °C/W | 5        |
| Junction to Package Top                  | Natural Convection      | Ψ <sub>JT</sub>   | 2     | °C/W | 6        |

**Table 14. Thermal Resistance for Case Outline 1159A-01, 208 Lead 17x17 mm MAP BGA, 1.0 mm Pitch**

| Rating                                   | Environment             | Symbol            | Value | Unit | Comments |
|------------------------------------------|-------------------------|-------------------|-------|------|----------|
| Junction to Ambient (Natural Convection) | Single layer board (1s) | R <sub>θJA</sub>  | 46    | °C/W | 1, 2     |
| Junction to Ambient (Natural Convection) | Four layer board (2s2p) | R <sub>θJMA</sub> | 29    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Single layer board (1s) | R <sub>θJMA</sub> | 38    | °C/W | 1, 3     |
| Junction to Ambient (@ 200 ft./min.)     | Four layer board (2s2p) | R <sub>θJMA</sub> | 26    | °C/W | 1, 3     |
| Junction to Board                        |                         | R <sub>θJB</sub>  | 19    | °C/W | 4        |
| Junction to Case                         |                         | R <sub>θJC</sub>  | 7     | °C/W | 5        |
| Junction to Package Top                  | Natural Convection      | Ψ <sub>JT</sub>   | 2     | °C/W | 6        |

**Comments:**

- Junction temperature is a function of die size, on-chip power dissipation, package thermal resistance, mounting site (board) temperature, ambient temperature, air flow, power dissipation of other components on the board, and board thermal resistance.
- Per SEMI G38-87 and JEDEC JESD51-2 with the single layer board (JESD51-3) horizontal.
- Per JEDEC JESD51-6 with the board (JESD51-7) horizontal.
- Thermal resistance between the die and the printed circuit board per JEDEC JESD51-8. Board temperature is measured on the top surface of the board at the center lead. For fused lead packages, the adjacent lead is used.
- Thermal resistance between the die and the case top surface as measured by the cold plate method (MIL SPEC-883 Method 1012.1).
- Thermal characterization parameter indicating the temperature difference between package top and junction temperature per JEDEC JESD51-2. When Greek letters are not available, the thermal characterization parameter is written as Psi-JT.

## 3.7 Power Supply

The MAC71xx Family utilizes several pins to supply power to the oscillator, PLL, digital core, I/O ports and ATD. In the context of this section,  $V_{DD5}$  is used for  $V_{DDA}$ ,  $V_{DDR}$  or  $V_{DDX}$ ;  $V_{SS5}$  is used for  $V_{SSA}$ ,  $V_{SSR}$  or  $V_{SSX}$  unless otherwise noted.  $I_{DD5}$  denotes the sum of the currents flowing into the  $V_{DDA}$ ,  $V_{DDX}$ , and  $V_{DDR}$ .  $V_{DD}$  is used for  $V_{DD2.5}$ , and  $V_{DDPLL}$ ,  $V_{SS}$  is used for  $V_{SS2.5}$  and  $V_{SSPLL}$ .  $I_{DD}$  is used for the sum of the currents flowing into  $V_{DD2.5}$  and  $V_{DDPLL}$ .

### 3.7.1 Current Injection

The power supply must maintain regulation within the  $V_{DD5}$  or  $V_{DD2.5}$  operating range during instantaneous and operating maximum current conditions. If positive injection current ( $V_{in} > V_{DD5}$ ) is greater than  $I_{DD5}$ , the injection current may flow out of  $V_{DD5}$  and could result in the external power supply going out of regulation. It is important to ensure that the external  $V_{DD5}$  load will shunt current greater than the maximum injection current. The greatest risk will be when the MCU is consuming very little power (for example, if no system clock is present, or if the clock rate is very low).

### 3.7.2 Power Supply Pins

The  $V_{DDR} - V_{SSR}$  pair supplies the internal voltage regulator. The  $V_{DDA} - V_{SSA}$  pair supplies the A/D converter and the reference circuit of the internal voltage regulator. The  $V_{DDX} - V_{SSX}$  pair supplies the I/O pins.  $V_{DDPLL} - V_{SSPLL}$  pair supplies the oscillator and PLL.

All  $V_{DDX}$  pins are internally connected by metal. All  $V_{SSX}$  pins are internally connected by metal. All  $V_{SS2.5}$  pins are internally connected by metal.  $V_{DDA}$ ,  $V_{DDX}$  and  $V_{DDR}$  as well as  $V_{SSA}$ ,  $V_{SSX}$  and  $V_{SSR}$  are connected by anti-parallel diodes for ESD protection.

### 3.7.3 Supply Current Characteristics

[Table 15](#) and [Table 16](#) list supply current characteristics for MAC71x1 and MAC71x6 devices at 40 MHz and 50 MHz operation, respectively. Characteristics for MAC71x2 devices are to be determined (TBD).

All current measurements are without output loads. Unless otherwise noted the currents are measured in single chip mode, internal voltage regulator enabled at the specified system frequency, using a 4 MHz oscillator in low power mode. Production testing is performed using a square wave signal at the EXTAL input. In expanded modes, the currents are highly dependent on the load and duty cycle on the address, data and control signals, thus no general numbers can be given. A good estimate is to take the single chip currents and add the currents due to the external loads.

**Table 15. MAC71x1/6<sup>1</sup> Device Supply Current Characteristics – 40 MHz**

| Conditions shown in Table 7, with $f_{\text{SYS}} = 40$ MHz. |   |                                            |                         |                                |                                    |                          |               |
|--------------------------------------------------------------|---|--------------------------------------------|-------------------------|--------------------------------|------------------------------------|--------------------------|---------------|
| Num                                                          | C | Rating                                     |                         | Symbol                         | Typ                                | Max                      | Unit          |
| F1                                                           | P | Run Supply Current, Single Chip            |                         | $I_{\text{DDR}}R_{\text{reg}}$ | 100                                | 130                      | mA            |
| F2                                                           | C | Doze Supply Current                        |                         | $I_{\text{DD}}D_{\text{reg}}$  | Run $\geq$ Doze $\geq$ Pseudo Stop |                          |               |
| F3                                                           | P | Pseudo Stop Supply Current (OSC on)        | $-40^{\circ}\text{C}^2$ | $I_{\text{DD}}PS_{\text{reg}}$ | 400 / 500 <sup>3</sup>             | 600 / 700 <sup>3</sup>   | $\mu\text{A}$ |
|                                                              | P |                                            | $25^{\circ}\text{C}^2$  |                                | 400 / 500 <sup>3</sup>             | 600 / 700 <sup>3</sup>   | $\mu\text{A}$ |
|                                                              | C |                                            | $85^{\circ}\text{C}^2$  |                                | 800 / 1000 <sup>3</sup>            | 2000 / 2500 <sup>3</sup> | $\mu\text{A}$ |
|                                                              | C |                                            | $105^{\circ}\text{C}^2$ |                                | 1200 / 1500 <sup>3</sup>           | 3500 / 4000 <sup>3</sup> | $\mu\text{A}$ |
|                                                              | P |                                            | $125^{\circ}\text{C}^2$ |                                | 1500 / 2000 <sup>3</sup>           | 5500 / 6000 <sup>3</sup> | $\mu\text{A}$ |
|                                                              |   |                                            |                         |                                |                                    |                          |               |
| F4                                                           | P | Stop Supply Current ( $T_J = T_A$ assumed) | $-40^{\circ}\text{C}^2$ | $I_{\text{DD}}S_{\text{reg}}$  | 30                                 | 150                      | $\mu\text{A}$ |
|                                                              | P |                                            | $25^{\circ}\text{C}^2$  |                                | 30                                 | 150                      | $\mu\text{A}$ |
|                                                              | C |                                            | $85^{\circ}\text{C}^2$  |                                | 330                                | 2500                     | $\mu\text{A}$ |
|                                                              | C |                                            | $105^{\circ}\text{C}^2$ |                                | 470                                | 3500                     | $\mu\text{A}$ |
|                                                              | P |                                            | $125^{\circ}\text{C}^2$ |                                | 660                                | 5000                     | $\mu\text{A}$ |
|                                                              |   |                                            |                         |                                |                                    |                          |               |

## NOTES:

- MAC71x2 characteristics are to be determined (TBD).
- $85^{\circ}\text{C}$ ,  $105^{\circ}\text{C}$ , and  $125^{\circ}\text{C}$  refer to the "C", "V", and "M" Temperature Options, respectively.
- RTI disabled / enabled.

**Table 16. MAC71x1/6<sup>1</sup> Device Supply Current Characteristics – 50 MHz**

| Conditions shown in Table 7, with $f_{\text{SYS}} = 50 \text{ MHz}$ . |   |                                            |                          |                                |                                    |                          |               |
|-----------------------------------------------------------------------|---|--------------------------------------------|--------------------------|--------------------------------|------------------------------------|--------------------------|---------------|
| Num                                                                   | C | Rating                                     |                          | Symbol                         | Typ                                | Max                      | Unit          |
| G1                                                                    | P | Run Supply Current, Single Chip            |                          | $I_{\text{DDR}}R_{\text{reg}}$ | 120                                | 150                      | mA            |
| G2                                                                    | C | Doze Supply Current                        |                          | $I_{\text{DD}}D_{\text{reg}}$  | Run $\geq$ Doze $\geq$ Pseudo Stop |                          |               |
| G3                                                                    | P | Pseudo Stop Supply Current (OSC on)        | $-40^{\circ} \text{C}^2$ | $I_{\text{DD}}PS_{\text{reg}}$ | 400 / 500 <sup>3</sup>             | 600 / 700 <sup>3</sup>   | $\mu\text{A}$ |
|                                                                       | P |                                            | $25^{\circ} \text{C}^2$  |                                | 400 / 500 <sup>3</sup>             | 600 / 700 <sup>3</sup>   | $\mu\text{A}$ |
|                                                                       | C |                                            | $85^{\circ} \text{C}^2$  |                                | 800 / 1000 <sup>3</sup>            | 2000 / 2500 <sup>3</sup> | $\mu\text{A}$ |
|                                                                       | C |                                            | $105^{\circ} \text{C}^2$ |                                | 1200 / 1500 <sup>3</sup>           | 3500 / 4000 <sup>3</sup> | $\mu\text{A}$ |
|                                                                       | P |                                            | $125^{\circ} \text{C}^2$ |                                | 1500 / 2000 <sup>3</sup>           | 5500 / 6000 <sup>3</sup> | $\mu\text{A}$ |
|                                                                       |   |                                            |                          |                                |                                    |                          |               |
| G4                                                                    | P | Stop Supply Current ( $T_J = T_A$ assumed) | $-40^{\circ} \text{C}^2$ | $I_{\text{DD}}S_{\text{reg}}$  | 30                                 | 150                      | $\mu\text{A}$ |
|                                                                       | P |                                            | $25^{\circ} \text{C}^2$  |                                | 30                                 | 150                      | $\mu\text{A}$ |
|                                                                       | C |                                            | $85^{\circ} \text{C}^2$  |                                | 330                                | 2500                     | $\mu\text{A}$ |
|                                                                       | C |                                            | $105^{\circ} \text{C}^2$ |                                | 470                                | 3500                     | $\mu\text{A}$ |
|                                                                       | P |                                            | $125^{\circ} \text{C}^2$ |                                | 660                                | 5000                     | $\mu\text{A}$ |
|                                                                       |   |                                            |                          |                                |                                    |                          |               |

## NOTES:

- MAC71x2 characteristics are to be determined (TBD).
- $85^{\circ}\text{C}$ ,  $105^{\circ}\text{C}$ , and  $125^{\circ}\text{C}$  refer to the "C", "V", and "M" Temperature Options, respectively.
- RTI disabled / enabled.

## 3.7.4 Voltage Regulator Characteristics

Table 17. VREG Operating Conditions


| Num | C | Characteristic                                                                                                                      | Symbol                   | Min                                    | Typical                             | Max                                    | Unit             |
|-----|---|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------|-------------------------------------|----------------------------------------|------------------|
| H1  | P | Input Voltages                                                                                                                      | $V_{VDDRA}$              | 3.15                                   | —                                   | 5.5                                    | V                |
| H2  | P | Output Voltage, Digital Logic<br>Full Performance Mode<br>Reduced Power Mode<br>Shutdown Mode                                       | $V_{DD2.5}$              | 2.45<br>1.60<br>— <sup>1</sup>         | 2.5<br>2.5<br>— <sup>1</sup>        | 2.75<br>2.75<br>— <sup>1</sup>         | V<br>V<br>V      |
| H3  | P | Output Voltage, PLL<br>Full Performance Mode<br>Reduced Power Mode <sup>2</sup><br>Reduced Power Mode <sup>3</sup><br>Shutdown Mode | $V_{DDPLL}$              | 2.35<br>2.00<br>1.60<br>— <sup>1</sup> | 2.5<br>2.5<br>2.5<br>— <sup>1</sup> | 2.75<br>2.75<br>2.75<br>— <sup>1</sup> | V<br>V<br>V<br>V |
| H4  | P | Low Voltage Interrupt <sup>4</sup><br>Assert Level<br>Negate Level                                                                  | $V_{LVIA}$<br>$V_{LVID}$ | 4.10<br>4.25                           | 4.37<br>4.52                        | 4.66<br>4.77                           | V<br>V           |
| H5  | P | Low Voltage Reset <sup>5</sup><br>Assert Level                                                                                      | $V_{LVRA}$               | 2.25                                   | 2.35                                | —                                      | V                |
| H6  | P | Power On Reset <sup>6</sup><br>Assert Level<br>Negate Level                                                                         | $V_{PORA}$<br>$V_{PORD}$ | 0.97<br>—                              | —<br>—                              | —<br>2.05                              | V<br>V           |

## NOTES:

1. High impedance output.
2. Current  $I_{DDPLL} = 1$  mA (Low Power Oscillator).
3. Current  $I_{DDPLL} = 3$  mA (Standard Oscillator).
4. Monitors  $V_{DDA}$ , active only in full performance mode. This interrupt indicates that I/O and ATD performance may be degraded due to low supply voltage.
5. Monitors  $V_{DD2.5}$ , active only in full performance mode. Only POR is active in reduced performance mode.
6. Monitors  $V_{DD2.5}$ , active in all modes.

### 3.7.5 Chip Power Up and Voltage Drops

The VREG sub-modules LVI (low voltage interrupt), POR (power on reset) and LVR (low voltage reset) handle chip power-up or drops of the supply voltage. Refer to [Figure 2](#).

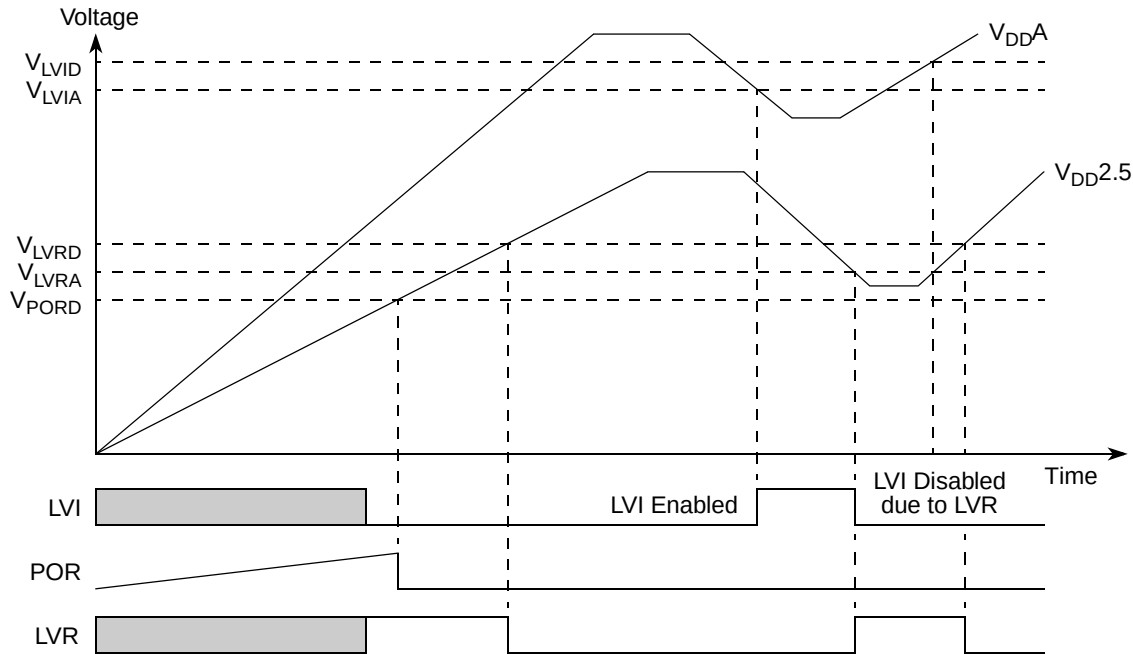

Note: Not to scale.

Figure 2. VREG Chip Power-up and Voltage Monitoring

### 3.7.6 Output Loads

The on-chip voltage regulator is intended to supply the internal logic and oscillator circuits. No external DC load is allowed. Capacitive loads are specified in [Table 18](#). Capacitors with X7R dielectricum are required.

Table 18. VREG Recommended Load Capacitances

| Rating                                            | Symbol          | Min | Typ | Max   | Unit |
|---------------------------------------------------|-----------------|-----|-----|-------|------|
| Load Capacitance per $V_{DD2.5}$ pin <sup>1</sup> | $C_{LVDD}$      | 200 | 220 | 12000 | nF   |
| Load Capacitance on $V_{DDPLL}$ pin               | $C_{LVDDfcPLL}$ | 90  | 220 | 5000  | nF   |

NOTES:

1. Refer to [Table 38](#) for the specific number of  $V_{DD2.5}$  pins on various packages. Each  $V_{DD2.5}$  pin should have the recommended loading as described in Section 3.7.3, "Circuit Board Layout," of the *MAC7100 Microcontroller Family Reference Manual* (MAC7100RM).

## 3.8 Clock and Reset Generator

This section describes the electrical characteristics for the oscillator, phase-locked loop, clock monitor and reset generator.

### 3.8.1 Oscillator Characteristics

The MAC7100 Family features an internal low power loop controlled Pierce oscillator and a full swing Pierce oscillator/external clock mode. The selection of loop controlled Pierce oscillator or full swing Pierce oscillator/external clock depends on the level of the  $\overline{\text{XCLKS}}$  signal at the rising edge of the  $\overline{\text{RESET}}$  signal. Before asserting the oscillator to the internal system clock distribution subsystem, the quality of the oscillation is checked for each start from either power on, STOP or oscillator fail.  $t_{\text{CQOUT}}$  specifies the maximum time before switching to the internal self clock mode after POR or STOP if a proper oscillation is not detected. The quality check also determines the minimum oscillator start-up time  $t_{\text{UPOSC}}$ . The device also features a clock monitor. A Clock Monitor Failure is asserted if the frequency of the incoming clock signal is below the Clock Monitor Assert Frequency  $f_{\text{CMFA}}$ .

**Table 19. Oscillator Characteristics**

| Num | C | Rating                                                      | Symbol             | Min  | Typ            | Max             | Unit          |
|-----|---|-------------------------------------------------------------|--------------------|------|----------------|-----------------|---------------|
| J1a | C | Crystal oscillator range (loop controlled Pierce)           | $f_{\text{OSC}}^1$ | 4.0  | —              | 16              | MHz           |
| J1b | C | Crystal oscillator range (full swing Pierce) <sup>2 3</sup> | $f_{\text{OSC}}^1$ | 0.5  | —              | 40              | MHz           |
| J2  | P | Startup Current                                             | $I_{\text{OSC}}$   | 100  | —              | —               | $\mu\text{A}$ |
| J3  | C | Oscillator start-up time (loop controlled Pierce)           | $t_{\text{UPOSC}}$ | —    | 3 <sup>4</sup> | 50 <sup>5</sup> | ms            |
| J4  | D | Clock Quality check time-out                                | $t_{\text{CQOUT}}$ | 0.45 | —              | 2.5             | s             |
| J5  | P | Clock Monitor Failure Assert Frequency                      | $f_{\text{CMFA}}$  | 50   | 100            | 200             | KHz           |
| J6  | P | External square wave input frequency <sup>3</sup>           | $f_{\text{EXT}}$   | 0.5  | —              | 50              | MHz           |
| J7  | D | External square wave pulse width low                        | $t_{\text{EXTL}}$  | 9.5  | —              | —               | ns            |
| J8  | D | External square wave pulse width high                       | $t_{\text{EXTH}}$  | 9.5  | —              | —               | ns            |
| J9  | D | External square wave rise time                              | $t_{\text{EXTR}}$  | —    | —              | 1               | ns            |
| J10 | D | External square wave fall time                              | $t_{\text{EXTF}}$  | —    | —              | 1               | ns            |
| J11 | D | Input Capacitance (EXTAL, XTAL pins)                        | $C_{\text{IN}}$    | —    | 7              | —               | pF            |

**NOTES:**

1. If CLKSEL[PLLSEL] is clear then the system clock ( $f_{\text{SYS}}$ ) is equal to  $f_{\text{OSC}}$ , otherwise it is equal to  $f_{\text{VCO}}$  (table Table 20, K3). Throughout this document,  $t_{\text{SYS}}$  is used to specify a unit of time equal to  $1 \div f_{\text{SYS}}$ .
2. Depending on the crystal; a damping series resistor might be necessary
3.  $\overline{\text{XCLKS}}$  asserted (low) during reset
4.  $f_{\text{OSC}} = 4 \text{ MHz}$ ,  $C = 22 \text{ pF}$  (refer to the *MAC7100 Microcontroller Family Reference Manual* (MAC7100RM) for circuit board layout recommendations, including oscillator capacitor placement and values).
5. Maximum value is for extreme cases using high Q, low frequency crystals

### 3.8.2 PLL Filter Characteristics

The oscillator provides the reference clock for the PLL as shown in Figure 3. The voltage controlled oscillator (VCO) of the PLL is also the system clock source in self clock mode. In order to operate reliably, care must be taken to select proper values for external loop filter components.

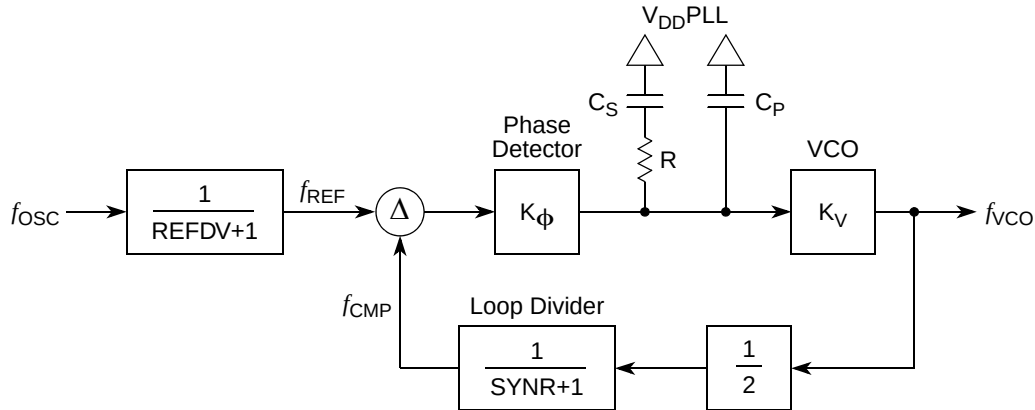


Figure 3. Basic PLL Functional Diagram

The procedure described below can be used to calculate the resistance and capacitance values using typical values for  $K_1$ ,  $f_1$  and  $i_{ch}$  from Table 20. First, the VCO Gain at the desired VCO output frequency is approximated by:

$$K_V = K_1 \cdot e^{\frac{(f_1 - f_{VCO})}{K_1 \cdot 1V}} \quad \text{Eqn. 8}$$

The phase detector relationship is given by:

$$K_\Phi = -|i_{ch}| \cdot K_V \quad \text{Eqn. 9}$$

$i_{ch}$  is the current in tracking mode. The loop bandwidth  $f_C$  should be chosen to fulfill the Gardner's stability criteria by at least a factor of 10, a typical value for the stability factor is 50.  $\zeta = 0.9$  ensures a good transient response.

$$f_C < \frac{2 \cdot \zeta \cdot f_{REF}}{\pi \cdot (\zeta + \sqrt{1 + \zeta^2})} \cdot \frac{1}{10} \rightarrow f_C < \frac{f_{REF}}{4 \cdot 10}; (\zeta = 0.9) \quad \text{Eqn. 10}$$

And finally the frequency relationship is defined as:

$$n = \frac{f_{VCO}}{f_{REF}} = 2 \cdot (\text{SYNR} + 1) \quad \text{Eqn. 11}$$

With the above inputs the resistance can be calculated as:

$$R = \frac{2 \cdot \pi \cdot n \cdot f_C}{K_\Phi} \quad \text{Eqn. 12}$$

The capacitance  $C_S$  can now be calculated as:

$$C_S = \frac{2 \cdot \zeta^2}{\pi \cdot f_C \cdot R} \approx \frac{0.516}{f_C \cdot R}; (\zeta = 0.9) \quad \text{Eqn. 13}$$



The capacitance  $C_P$  should be chosen in the range of:

$$C_S \div 20 \leq C_P \leq C_S \div 10 \quad \text{Eqn. 14}$$

The stabilization delays shown in Table 20 are dependant on PLL operational settings and external component selection (for example, the crystal and XFC filter).

### 3.8.2.1 Jitter Information

With each transition of the clock  $f_{CMP}$ , the deviation from the reference clock  $f_{REF}$  is measured and input voltage to the VCO is adjusted accordingly. The adjustment is done continuously with no abrupt changes in the clock output frequency. Noise, voltage, temperature and other factors cause slight variations in the control loop resulting in a clock jitter. This jitter affects the real minimum and maximum clock periods as illustrated in Figure 4. It is important to note that the pre-scaler used by timers and serial modules will eliminate the effect of PLL jitter to a large extent.

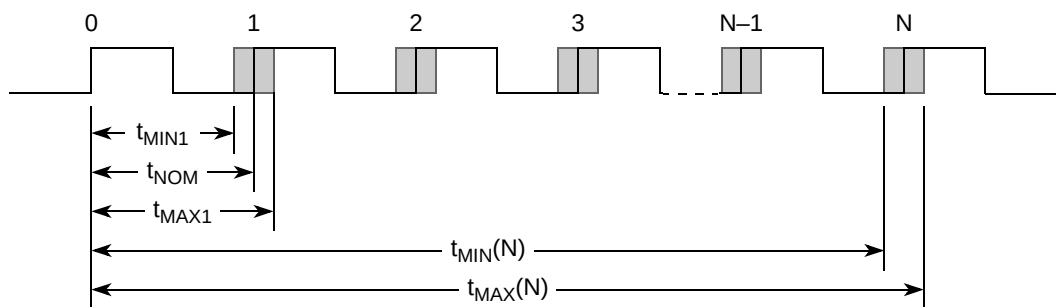


Figure 4. Jitter Definitions

The relative deviation of  $t_{NOM}$  is at its maximum for one clock period, and decreases towards zero for larger number of clock periods ( $N$ ). Thus, jitter is defined as:

$$J(N) = \max\left(\left|1 - \frac{t_{MAX}(N)}{N \cdot t_{NOM}}\right|, \left|1 - \frac{t_{MIN}(N)}{N \cdot t_{NOM}}\right|\right) \quad \text{Eqn. 15}$$

For  $N < 100$ , the following equation is a good fit for the maximum jitter:

$$J(N) = \frac{j_1}{\sqrt{N}} + j_2 \quad \text{Eqn. 16}$$

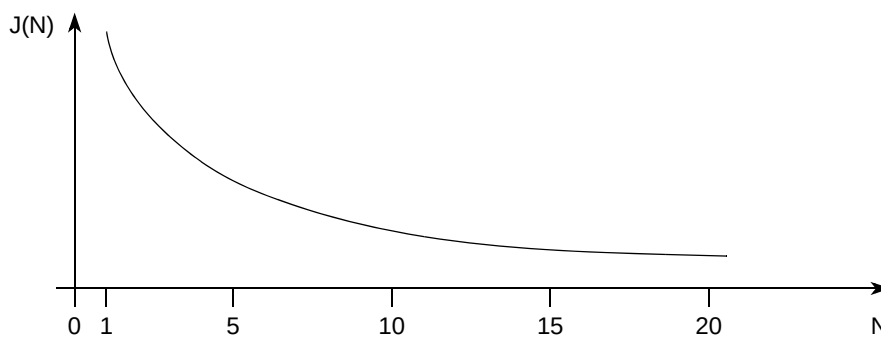


Figure 5. Maximum Bus Clock Jitter Approximation

### 3.8.3 PLL Characteristics

Table 20. PLL Characteristics

| Num | C | Rating                                                     | Symbol                 | Min | Typ              | Max            | Unit           |
|-----|---|------------------------------------------------------------|------------------------|-----|------------------|----------------|----------------|
| K1  |   | PLL reference frequency, crystal oscillator range          | $f_{REF}$              | 0.5 | —                | 16             | MHz            |
| K2  | P | Self Clock Mode frequency                                  | $f_{SCM}$              | 2   | —                | 5.5            | MHz            |
| K3  | D | VCO locking range                                          | $f_{VCO}$ <sup>1</sup> | 8   | —                | 50             | MHz            |
| K4  | D | Lock Detector transition from Acquisition to Tracking mode | $ \Delta_{trk} $       | 3   | —                | 4              | % <sup>2</sup> |
| K5  | D | Lock Detection                                             | $ \Delta_{Lock} $      | 0   | —                | 1.5            | % <sup>2</sup> |
| K6  | D | Un-Lock Detection                                          | $ \Delta_{unl} $       | 0.5 | —                | 2.5            | % <sup>2</sup> |
| K7  | D | Lock Detector transition from Tracking to Acquisition mode | $ \Delta_{unt} $       | 6   | —                | 8              | % <sup>2</sup> |
| K8  | C | PLLON Total Stabilization delay (Auto Mode) <sup>3</sup>   | $t_{stab}$             | —   | 0.5 <sup>4</sup> | 3 <sup>5</sup> | ms             |
| K9  | D | PLLON Acquisition mode stabilization delay <sup>3</sup>    | $t_{acq}$              | —   | 0.3 <sup>4</sup> | 1 <sup>5</sup> | ms             |
| K10 | D | PLLON Tracking mode stabilization delay <sup>3</sup>       | $t_{al}$               | —   | 0.2 <sup>4</sup> | 2 <sup>5</sup> | ms             |
| K11 | D | Charge pump current acquisition mode                       | $ i_{ch} $             | —   | 38.5             | —              | $\mu A$        |
| K12 | D | Charge pump current tracking mode                          | $ i_{ch} $             | —   | 3.5              | —              | $\mu A$        |
| K13 | D | Jitter fit VCO loop gain parameter                         | $K_1$                  | —   | −195             | —              | MHz/V          |
| K14 | D | Jitter fit VCO loop frequency parameter                    | $f_1$                  | —   | 126              | —              | MHz            |
| K15 | C | Jitter fit parameter 1                                     | $j_1$                  | —   | —                | 1.3            | % <sup>4</sup> |
| K16 | C | Jitter fit parameter 2                                     | $j_2$                  | —   | —                | 0.12           | % <sup>4</sup> |

## NOTES:

1. If CLKSEL[PLLSEL] is set then the system clock ( $f_{SYS}$ ) is equal to  $f_{VCO}$ , otherwise it is equal to  $f_{OSC}$  (table Table 19, J1a or J1b). Throughout this document,  $t_{SYS}$  is used to specify a unit of time equal to  $1 \div f_{SYS}$ .
2. Percentage deviation from target frequency
3. PLL stabilization delay is highly dependent on operational requirement and external component values (for example, crystal and XFC filter component values). Notes 4 and 5 show component values for a typical configurations. Appropriate XFC filter values should be chosen based on operational requirement of system.
4.  $f_{OSC} = 4$  MHz,  $f_{VCO} = 40$  MHz (REFDV = 0x00, SYNRR = 0x04),  $C_S = 2.2$  nF,  $C_P = 220$  pF,  $R_S = 5.6$  K $\Omega$ .
5.  $f_{OSC} = 4$  MHz,  $f_{VCO} = 16$  MHz (REFDV = 0x00, SYNRR = 0x01),  $C_S = 4.7$  nF,  $C_P = 470$  pF,  $R_S = 2.7$  K $\Omega$ .

### 3.8.4 Crystal Monitor Time-out

The time-out Table 21 shows the delay for the crystal monitor to trigger when the clock stops, either at the high or at the low level. The corresponding clock period with an ideal 50% duty cycle is twice this time-out value.

Table 21. Crystal Monitor Time-Outs

| Min | Typ | Max  | Unit    |
|-----|-----|------|---------|
| 6   | 10  | 18.5 | $\mu s$ |

### 3.8.5 Clock Quality Checker

The timing for the clock quality check is derived from the oscillator and the VCO frequency range in Table 20. These numbers define the upper time limit for the individual check windows to complete.

Table 22. CRG Maximum Clock Quality Check Timings

| Clock Check Windows | Value       | Unit |
|---------------------|-------------|------|
| Check Window        | 9.1 to 20.0 | ms   |
| Timeout Window      | 0.46 to 1.0 | s    |

## 3.8.6 Startup

Table 23 summarizes several startup characteristics. Refer to Section 4.3.6.10, “CRG Operating Mode Details,” in the *MAC7100 Microcontroller Family Reference Manual* (MAC7100RM) for details.

Table 23. CRG Startup Characteristics

| Num | C | Rating                                                                | Symbol      | Min | Typ | Max | Unit      |
|-----|---|-----------------------------------------------------------------------|-------------|-----|-----|-----|-----------|
| L1  | D | Reset input pulse width                                               | $PW_{RSTL}$ | 2   | —   | —   | $t_{OSC}$ |
| L2  | D | Startup from Reset                                                    | $n_{RST}$   | 192 | —   | 196 | $t_{OSC}$ |
| L3  | D | $\overline{XIRQ}$ , $\overline{IRQ}$ pulse width, edge-sensitive mode | $PW_{IRQ}$  | 20  | —   | —   | ns        |

### 3.8.6.1 Power On and Low Voltage Reset (POR and LVR)

The  $V_{PORR}$  and  $V_{PORA}$  levels are derived from  $V_{DD2.5}$ . The  $V_{LVRA}$  level is derived from  $V_{DD2.5}$ . They are also valid if the device is powered externally. After releasing a POR or LVR reset, the oscillator and clock quality checks start. After  $t_{CQOUT}$  (Table 19, J4) if no valid oscillation is detected, the MCU will start using the internal self-generated clock. The minimum startup time is given by  $t_{uposc}$  (Table 19, J3).

### 3.8.6.2 SRAM Data Retention

SRAM content integrity is guaranteed if the CRGFLG[PORF] bit is not set following a reset operation.

### 3.8.6.3 External Reset

When external reset is asserted for a time greater than  $PW_{RSTL}$ , the CRG generates an internal reset and the CPU fetches the reset vector without a clock quality check, if there was stable oscillation before reset.

### 3.8.6.4 Stop Recovery

The MCU can return from stop to run mode in response to an external interrupt or an API. Two delays occur before the MCU resumes execution. First, the voltage regulator must exit reduced power mode and return to full performance mode (this assumes that the internal regulator is used rather than driving  $V_{DD2.5}$  and  $V_{DDPLL}$  with an external regulator). Second, a clock quality check is performed in the same manner as for a power-on reset before releasing the clocks to the system.

### 3.8.6.5 Pseudo Stop Recovery

Recovery from pseudo stop mode is similar to stop mode in that the VREG must return to FPM, but since the oscillator is not stopped there is no delay for clock stabilization. The MCU is returned to run mode by internal or external interrupts.

### 3.8.6.6 Doze Recovery

Recovery from doze mode avoids both the VREG and oscillator recovery periods. The MCU is returned to run mode by internal or external interrupts.

# 3.9 External Bus Timing

Table 24 lists processor bus input timings, which are shown in Figure 6, Figure 7 and Figure 8.

## NOTE

All processor bus timings are synchronous; that is, input setup/hold and output delay with respect to the rising edge of a reference clock. The reference clock is the CLKOUT output. All other timing relationships can be derived from these values.

Table 24. External Bus Input Timing Specifications<sup>1</sup>

| Num            | C | Rating                                             | Symbol      | Min | Max | Unit |
|----------------|---|----------------------------------------------------|-------------|-----|-----|------|
| M1             | P | CLKOUT period <sup>2</sup>                         | $t_{CYC}$   | 20  | —   | ns   |
| Control Inputs |   |                                                    |             |     |     |      |
| M2a            | P | Control input valid to CLKOUT high <sup>3</sup>    | $t_{CVCH}$  | 13  | —   | ns   |
| M3a            | P | CLKOUT high to control inputs invalid <sup>3</sup> | $t_{CHCII}$ | 0   | —   | ns   |
| Data Inputs    |   |                                                    |             |     |     |      |
| M4             | P | Data input (DATA[15:0]) valid to CLKOUT high       | $t_{DIVCH}$ | 9   | —   | ns   |
| M5             | P | CLKOUT high to data input (DATA[15:0]) invalid     | $t_{CHDII}$ | 0   | —   | ns   |

## NOTES:

- Assumes CLKOUT is configured for full drive strength (via the PIM CONFIG2\_D[RDS] bit).
- CLKOUT is equal to the system clock,  $f_{SYS}$ . If CLKSEL[PLLSEL] is set then  $f_{SYS}$  is equal to  $f_{VCO}$  (table Table 20, K3); if it is clear then  $f_{SYS}$  is equal to  $f_{OSC}$  (table Table 19, J1a or J1b). Throughout this document,  $t_{CYC}$  is used to specify a unit of time equal to  $1 \div \text{CLKOUT}$  (which is equal to  $t_{f_{SYS}}$ ).
- The  $\overline{TA}$  pin is the only control input on MAC7100 family devices.

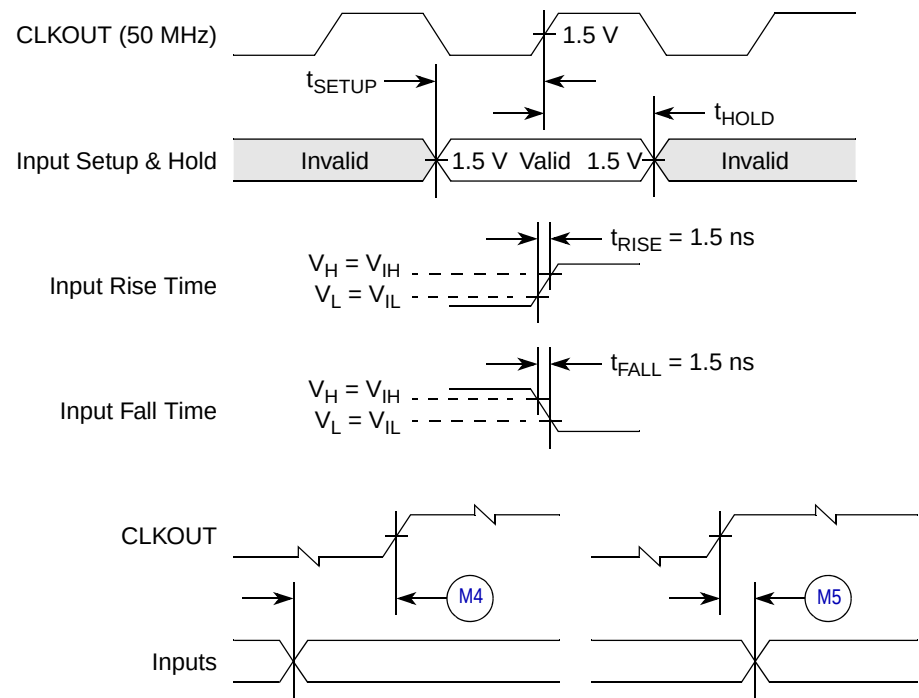


Figure 6. General Input Timing Requirements

### 3.9.1 Read and Write Bus Cycles


Table 25 lists processor bus output timings. Read/write bus timings listed in Table 25 are shown in Figure 7 and Figure 8.

Table 25. External Bus Output Timing Specifications <sup>1</sup>

| Num                                  | C | Rating                                                                                        | Symbol      | Min              | Max               | Unit |
|--------------------------------------|---|-----------------------------------------------------------------------------------------------|-------------|------------------|-------------------|------|
| <b>Control Outputs</b>               |   |                                                                                               |             |                  |                   |      |
| M6a                                  | P | CLKOUT high <sup>2</sup> to chip selects ( $\overline{CS}[2:0]$ ) valid                       | $t_{CHCV}$  | —                | $0.5t_{CYC} + 10$ | ns   |
| M6b                                  | P | CLKOUT high <sup>2</sup> to byte selects ( $\overline{BS}[1:0]$ ) valid                       | $t_{CHBV}$  | —                | $0.5t_{CYC} + 10$ | ns   |
| M6c                                  | P | CLKOUT high <sup>2</sup> to output select ( $\overline{OE}$ ) valid                           | $t_{CHOV}$  | —                | $0.5t_{CYC} + 10$ | ns   |
| M6d                                  | P | CLKOUT high <sup>2</sup> to address strobe ( $\overline{AS}$ ) valid                          | $t_{CHASV}$ | —                | $0.5t_{CYC} + 10$ | ns   |
| M7a                                  | P | CLKOUT high <sup>2</sup> to control output ( $\overline{BS}[1:0]$ , $\overline{OE}$ ) invalid | $t_{CHCOI}$ | $0.5t_{CYC} + 2$ | —                 | ns   |
| M7b                                  | P | CLKOUT high <sup>2</sup> to chip selects ( $\overline{CS}[2:0]$ ) invalid                     | $t_{CHCI}$  | $0.5t_{CYC} + 2$ | —                 | ns   |
| M7c                                  | P | CLKOUT high <sup>2</sup> to address strobe ( $\overline{AS}$ ) invalid                        | $t_{CHASI}$ | $0.5t_{CYC} + 2$ | —                 | ns   |
| <b>Address and Attribute Outputs</b> |   |                                                                                               |             |                  |                   |      |
| M8                                   | P | CLKOUT high to address (ADDR[21:0]) and control (R/W) valid                                   | $t_{CHAV}$  | —                | 10                | ns   |
| M9                                   | P | CLKOUT high to address (ADDR[21:0]) and control (R/W) invalid                                 | $t_{CHAI}$  | 2                | —                 | ns   |
| <b>Data Outputs</b>                  |   |                                                                                               |             |                  |                   |      |
| M10                                  | P | CLKOUT high to data output (DATA[15:0]) valid                                                 | $t_{CHDOV}$ | —                | 13                | ns   |
| M11                                  | P | CLKOUT high to data output (DATA[15:0]) invalid                                               | $t_{CHDOI}$ | 2                | —                 | ns   |
| M12                                  | D | CLKOUT high to data output (DATA[15:0]) high impedance                                        | $t_{CHDOZ}$ | —                | 9                 | ns   |


NOTES:

- Assumes CLKOUT,  $\overline{CSn}$ ,  $\overline{BSn}$ ,  $\overline{OE}$ ,  $\overline{AS}$ , ADDR[21:0] and DATA[15:0] are configured for full drive strength (via the PIM).
- The  $\overline{CSn}$ ,  $\overline{BSn}$ ,  $\overline{OE}$  and  $\overline{AS}$  signals are synchronous to the falling edge of CLKOUT. Therefore, changes on these signals are triggered by the falling edge of CLKOUT, even though they are specified in relation to the rising edge.

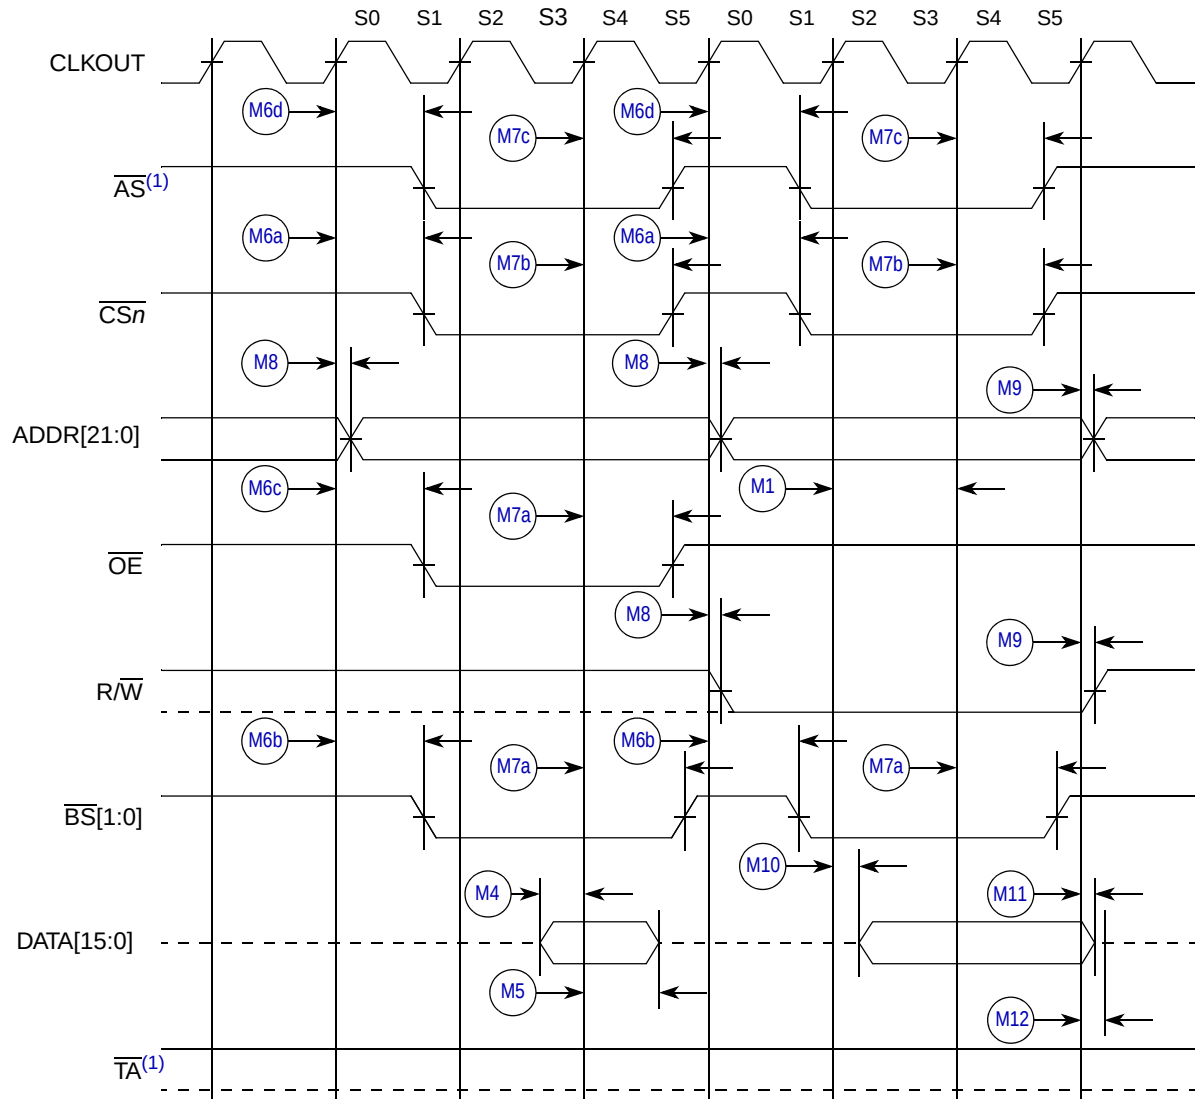

1. The  $\overline{TA}$  /  $\overline{AS}$  signals are multiplexed on a single pin, so only one function may be used during bus transactions.

Figure 7. Read/Write Bus Cycles, Internal Termination

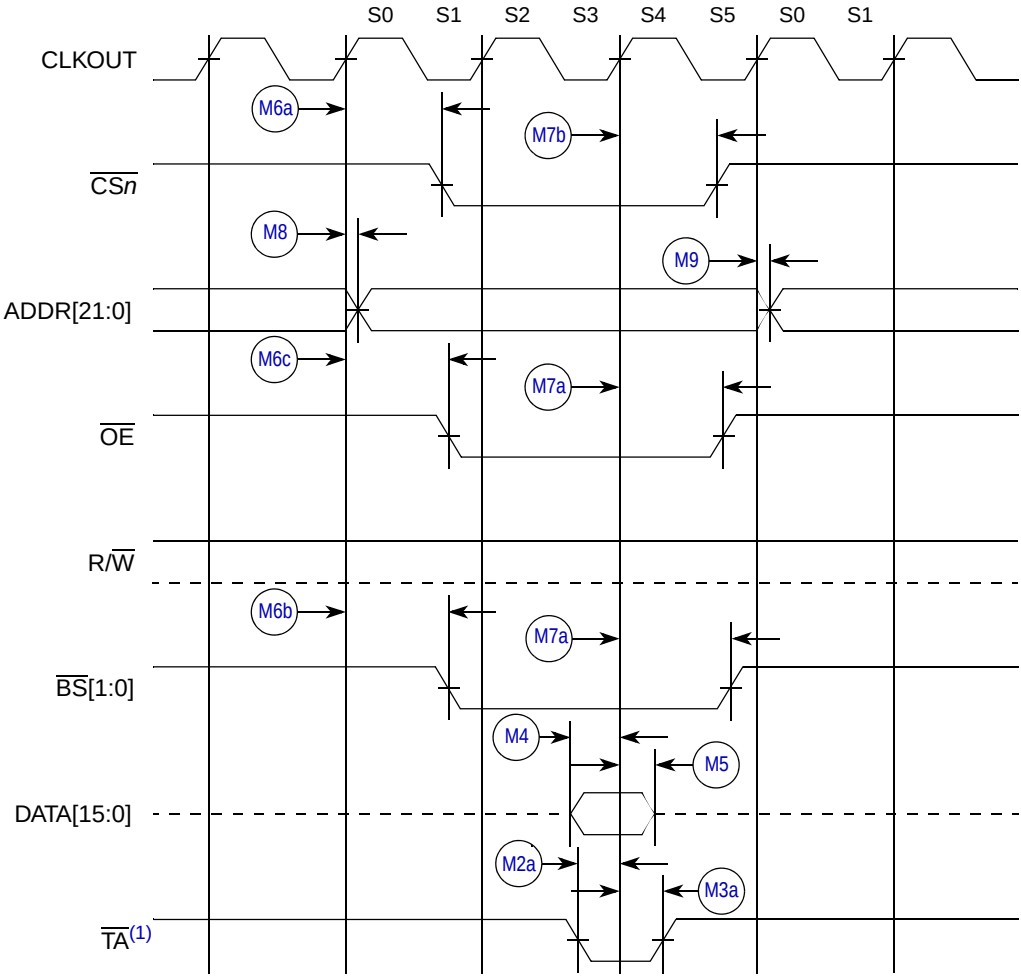

1. The  $\overline{TA}$  /  $\overline{AS}$  signals are multiplexed on a single pin, so AS is not available when external cycle termination is used.

**Figure 8. Read Bus Cycle, External Termination**

## 3.10 Analog-to-Digital Converter

Table 26 and Table 27 show conditions under which the ATD operates. The following constraints exist to obtain full-scale, full range results:  $V_{SSA} \leq V_{RL} \leq V_{IN} \leq V_{RH} \leq V_{DDA}$ . This constraint exists because the sample buffer amplifier cannot drive beyond the ATD power supply levels. If the input level goes outside of this range it will effectively be clipped.

**Table 26. ATD Operating Characteristics in 5.0 V Range**

| Conditions shown in Table 7 unless otherwise noted |   |                                                                                        |                              |                               |        |                               |                   |
|----------------------------------------------------|---|----------------------------------------------------------------------------------------|------------------------------|-------------------------------|--------|-------------------------------|-------------------|
| Num                                                | C | Rating                                                                                 | Symbol                       | Min                           | Typ    | Max                           | Unit              |
| N1                                                 | D | Reference Potential<br>Low<br>High                                                     | $V_{RL}$<br>$V_{RH}$         | $V_{SSA}$<br>$V_{DDA} \div 2$ | —<br>— | $V_{DDA} \div 2$<br>$V_{DDA}$ | V<br>V            |
| N2                                                 | C | Differential Reference Voltage <sup>1</sup>                                            | $V_{RH} - V_{RL}$            | 4.50                          | 5.00   | 5.50                          | V                 |
| N3                                                 | D | ATD Clock Frequency                                                                    | $f_{ATDCLK}$                 | 0.5                           | —      | 2.0                           | MHz               |
| N4                                                 | D | ATD 10-bit Conversion Period $f_{ATDCLK}$ Cycles <sup>2</sup><br>@ 2.0MHz $f_{ATDCLK}$ | $N_{CONV10}$<br>$T_{CONV10}$ | 14<br>7                       | —<br>— | 28<br>14                      | Cycles<br>$\mu s$ |
| N5                                                 | D | ATD 8-bit Conversion Period $f_{ATDCLK}$ Cycles <sup>2</sup><br>@ 2.0MHz $f_{ATDCLK}$  | $N_{CONV8}$<br>$T_{CONV8}$   | 12<br>6                       | —<br>— | 26<br>13                      | Cycles<br>$\mu s$ |
| N6                                                 | D | Stop Recovery Time ( $V_{DDA} = 5.0$ V)                                                | $T_{REC}$                    | —                             | —      | 20                            | $\mu s$           |
| N7                                                 | P | Reference Supply current 1 ATD module on                                               | $I_{REF}$                    | —                             | 0.200  | 0.255                         | mA                |
| N8                                                 | P | Reference Supply current 2 ATD modules on                                              | $I_{REF}$                    | —                             | 0.400  | 0.510                         | mA                |

NOTES:

1. Full accuracy is not guaranteed when differential voltage is less than 4.50 V

2. Minimum time assumes a sample period of 2 ATD clocks; maximum time assumes a sample period of 16 ATD clocks.

**Table 27. ATD Operating Characteristics in 3.3 V Range**

| Conditions shown in Table 7, with $V_{DDX} = 3.3$ V $-5/+10\%$ and a temperature maximum of $+140^{\circ}C$ unless otherwise noted. |   |                                                                                        |                              |                               |        |                               |                   |
|-------------------------------------------------------------------------------------------------------------------------------------|---|----------------------------------------------------------------------------------------|------------------------------|-------------------------------|--------|-------------------------------|-------------------|
| Num                                                                                                                                 | C | Rating                                                                                 | Symbol                       | Min                           | Typ    | Max                           | Unit              |
| P1                                                                                                                                  | D | Reference Potential<br>Low<br>High                                                     | $V_{RL}$<br>$V_{RH}$         | $V_{SSA}$<br>$V_{DDA} \div 2$ | —<br>— | $V_{DDA} \div 2$<br>$V_{DDA}$ | V<br>V            |
| P2                                                                                                                                  | C | Differential Reference Voltage <sup>1</sup>                                            | $V_{RH} - V_{RL}$            | 3.15                          | 3.3    | 3.6                           | V                 |
| P3                                                                                                                                  | D | ATD Clock Frequency                                                                    | $f_{ATDCLK}$                 | 0.5                           | —      | 2.0                           | MHz               |
| P4                                                                                                                                  | D | ATD 10-bit Conversion Period $f_{ATDCLK}$ Cycles <sup>2</sup><br>@ 2.0MHz $f_{ATDCLK}$ | $N_{CONV10}$<br>$T_{CONV10}$ | 14<br>7                       | —<br>— | 28<br>14                      | Cycles<br>$\mu s$ |
| P5                                                                                                                                  | D | ATD 8-bit Conversion Period $f_{ATDCLK}$ Cycles <sup>2</sup><br>@ 2.0MHz $f_{ATDCLK}$  | $N_{CONV8}$<br>$T_{CONV8}$   | 12<br>6                       | —<br>— | 26<br>13                      | Cycles<br>$\mu s$ |
| P6                                                                                                                                  | D | Stop Recovery Time ( $V_{DDA} = 3.3$ V)                                                | $T_{REC}$                    | —                             | —      | 20                            | $\mu s$           |
| P7                                                                                                                                  | P | Reference Supply current 1 ATD module on                                               | $I_{REF}$                    | —                             | 0.130  | 0.170                         | mA                |
| P8                                                                                                                                  | P | Reference Supply current 2 ATD modules on                                              | $I_{REF}$                    | —                             | 0.260  | 0.340                         | mA                |

NOTES:

1. Full accuracy is not guaranteed when differential voltage is less than 3.15 V

2. Minimum time assumes a sample period of 2 ATD clocks; maximum time assumes a sample period of 16 ATD clocks.



### 3.10.1 Factors Influencing Accuracy

Three factors—source resistance, source capacitance and current injection—have an influence on the accuracy of the ATD.

#### 3.10.1.1 Source Resistance

Due to the input pin leakage current as specified in [Table 8](#) in conjunction with the source resistance there will be a voltage drop from the signal source to the ATD input. The maximum specified source resistance  $R_S$ , results in an error of less than 1/2 LSB (2.5 mV) at the maximum leakage current. If the device or operating conditions are less than the worst case, or leakage-induced errors are acceptable, larger values of source resistance are allowed.

#### 3.10.1.2 Source Capacitance

When sampling, an additional internal capacitor is switched to the input. This can cause a voltage drop due to charge sharing with the external capacitance and the pin capacitance. For a maximum sampling error of the input voltage  $\leq 1$  LSB, then the external filter capacitor must be calculated as,  $C_f \geq 1024 \times (C_{INS} - C_{INN})$ .

#### 3.10.1.3 Current Injection

There are two cases to consider:

1. A current is injected into the channel being converted. The channel being stressed has conversion values of 0x3FF (0xFF in 8-bit mode) for analog inputs greater than  $V_{RH}$  and 0x000 for values less than  $V_{RL}$  unless the current is higher than specified as disruptive condition.
2. Current is injected into pins in the neighborhood of the channel being converted. A portion of this current is picked up by the channel (coupling ratio  $K$ ), This additional current impacts the accuracy of the conversion depending on the source resistance. The additional input voltage error on the converted channel can be calculated as  $V_{ERR} = K \times R_S \times I_{INJ}$ , with  $I_{INJ}$  being the sum of the currents injected into the two pins adjacent to the converted channel.

**Table 28. ATD Electrical Characteristics**

| Conditions are shown in <a href="#">Table 7</a> unless otherwise noted |   |                                           |                        |      |     |     |            |
|------------------------------------------------------------------------|---|-------------------------------------------|------------------------|------|-----|-----|------------|
| Num                                                                    | C | Rating                                    | Symbol                 | Min  | Typ | Max | Unit       |
| Q1                                                                     | C | Max input Source Resistance               | $R_S$                  | —    | —   | 1   | k $\Omega$ |
| Q2                                                                     | C | Total Input Capacitance                   | $C_{INN}$<br>$C_{INS}$ | —    | 10  | —   | pF         |
|                                                                        |   | Non Sampling<br>Sampling                  |                        | —    | 22  | —   | pF         |
| Q3                                                                     | C | Disruptive Analog Input Current           | $I_{NA}$               | −2.5 | —   | 2.5 | mA         |
| Q4                                                                     | C | Coupling Ratio positive current injection | $K_p$                  | —    | —   | TBD | A / A      |
| Q5                                                                     | C | Coupling Ratio negative current injection | $K_n$                  | —    | —   | TBD | A / A      |

### 3.10.2 ATD Accuracy

Table 29 and Table 30 specify the ATD conversion performance excluding any errors due to current injection, input capacitance and source resistance.

**Table 29. ATD Conversion Performance in 5.0 V Range**

| Conditions shown in Table 7 except as noted here:<br>f <sub>ATDCLK</sub> = 2.0 MHz, 4.5 V ≤ V <sub>DDA</sub> ≤ 5.5 V |   |                                    |        |      |                 |     |        |
|----------------------------------------------------------------------------------------------------------------------|---|------------------------------------|--------|------|-----------------|-----|--------|
| Num                                                                                                                  | C | Rating                             | Symbol | Min  | Typ             | Max | Unit   |
| R1                                                                                                                   | P | 10-bit Resolution                  | LSB    | —    | 5 <sup>1</sup>  | —   | mV     |
| R2                                                                                                                   | P | 10-bit Differential Nonlinearity   | DNL    | −1   | —               | 1   | Counts |
| R3                                                                                                                   | P | 10-bit Integral Nonlinearity       | INL    | −2.5 | ±1.5            | 2.5 | Counts |
| R4                                                                                                                   | P | 10-bit Absolute Error <sup>2</sup> | AE     | −3   | ±2.0            | 3   | Counts |
| R5                                                                                                                   | P | 8-bit Resolution                   | LSB    | —    | 20 <sup>1</sup> | —   | mV     |
| R6                                                                                                                   | P | 8-bit Differential Nonlinearity    | DNL    | −0.5 | —               | 0.5 | Counts |
| R7                                                                                                                   | P | 8-bit Integral Nonlinearity        | INL    | −1.0 | ±0.5            | 1.0 | Counts |
| R8                                                                                                                   | P | 8-bit Absolute Error <sup>2</sup>  | AE     | −1.5 | ±1.0            | 1.5 | Counts |

NOTES:

1. Assumes V<sub>REF</sub> = V<sub>RH</sub> − V<sub>RL</sub> = 5.12 V, other V<sub>REF</sub> conditions result in different LSB resolutions.
2. These values include the quantization error which is inherently ½ count for any A/D converter.

**Table 30. ATD Conversion Performance in 3.3 V Range**

| Conditions shown in Table 7 except as noted here:<br>f <sub>ATDCLK</sub> = 2.0 MHz, 3.15 V ≤ V <sub>DDA</sub> ≤ 3.6 V |   |                                    |        |      |                   |     |        |
|-----------------------------------------------------------------------------------------------------------------------|---|------------------------------------|--------|------|-------------------|-----|--------|
| Num                                                                                                                   | C | Rating                             | Symbol | Min  | Typ               | Max | Unit   |
| S1                                                                                                                    | P | 10-bit Resolution                  | LSB    | —    | 3.25 <sup>1</sup> | —   | mV     |
| S2                                                                                                                    | P | 10-bit Differential Nonlinearity   | DNL    | −1.5 | —                 | 1.5 | Counts |
| S3                                                                                                                    | P | 10-bit Integral Nonlinearity       | INL    | −3.5 | ±1.5              | 3.5 | Counts |
| S4                                                                                                                    | P | 10-bit Absolute Error <sup>2</sup> | AE     | −5   | ±2.0              | 5   | Counts |
| S5                                                                                                                    | P | 8-bit Resolution                   | LSB    | —    | 13 <sup>1</sup>   | —   | mV     |
| S6                                                                                                                    | P | 8-bit Differential Nonlinearity    | DNL    | −0.5 | —                 | 0.5 | Counts |
| S7                                                                                                                    | P | 8-bit Integral Nonlinearity        | INL    | −1.5 | ±1.0              | 1.5 | Counts |
| S8                                                                                                                    | P | 8-bit Absolute Error <sup>2</sup>  | AE     | −1.5 | ±1.0              | 1.5 | Counts |

NOTES:

1. Assumes V<sub>REF</sub> = V<sub>RH</sub> − V<sub>RL</sub> = 3.33 V, other V<sub>REF</sub> conditions result in different LSB resolutions.
2. These values include the quantization error which is inherently ½ count for any A/D converter.

For the following definitions, see Figure 9.

Differential Non-Linearity (DNL) is defined as the difference between two adjacent switching steps:

$$DNL(i) = \frac{V_i - V_{i-1}}{1 \text{ LSB}} - 1 \quad \text{Eqn. 17}$$

The Integral Non-Linearity (INL) is defined as the sum of all DNLs:

$$INL(n) = \sum_{i=1}^n DNL(i) = \frac{V_n - V_0}{1 \text{ LSB}} - n \quad \text{Eqn. 18}$$

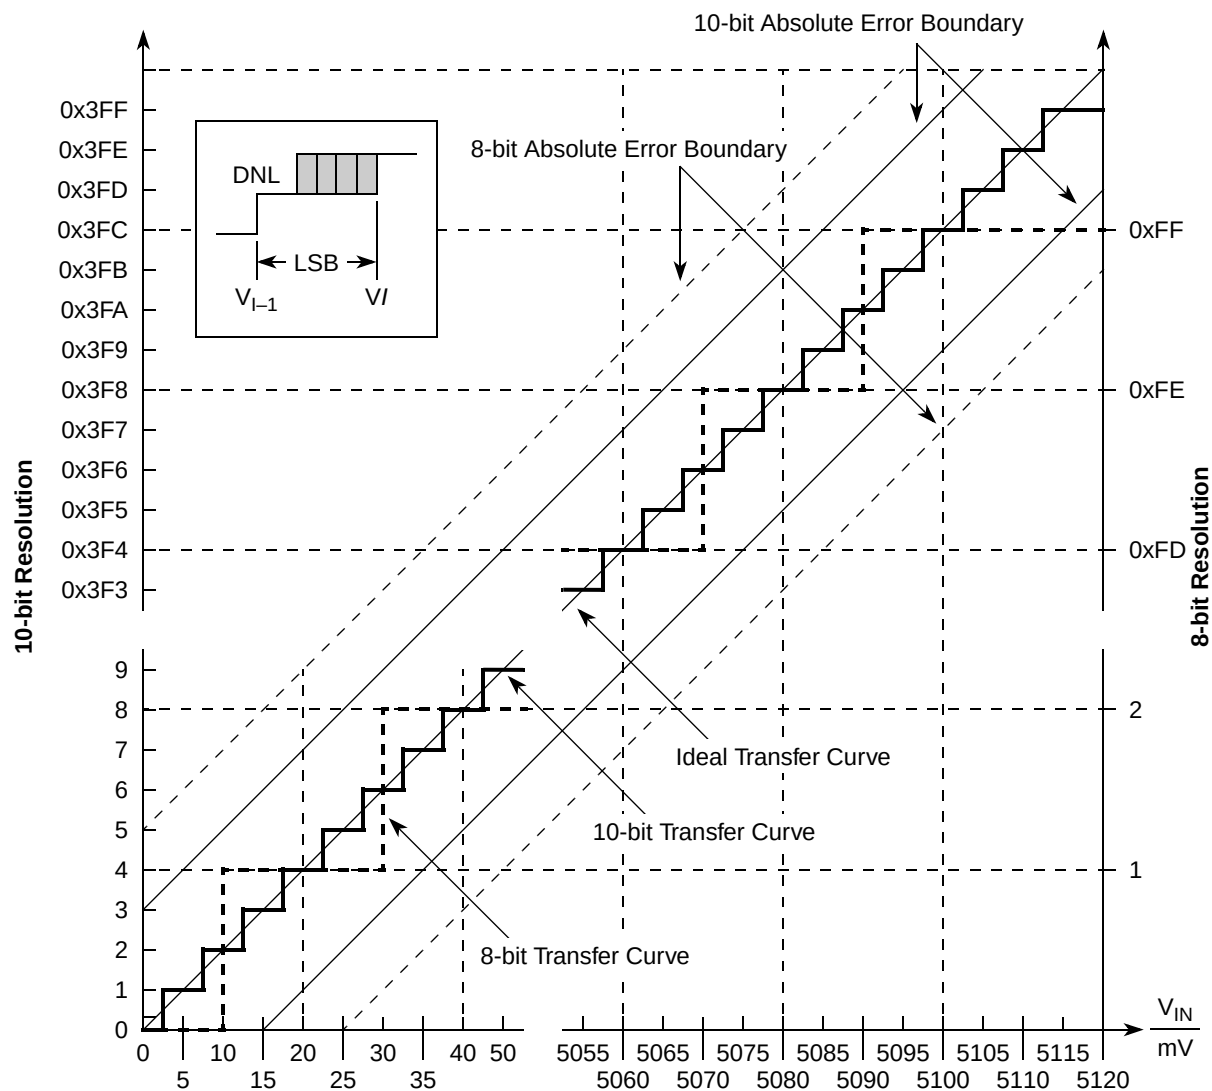


Figure 9. ATD Accuracy Definitions

**NOTE**

Figure 9 shows only definitions, for specification values refer to [Table 29](#).

### 3.10.3 ATD Timing Specifications

Table 31. ATD External Trigger Timing Specifications

| Num | C | Parameter                                   | Symbol       | Min                          | Max | Unit                |
|-----|---|---------------------------------------------|--------------|------------------------------|-----|---------------------|
| T1  | D | ETRIG Period (Level-Sensitive Trigger Mode) | $T_{PERIOD}$ | $1 + N_{CONVn}$ <sup>1</sup> | —   | $f_{ATDCLK}$ Cycles |
| T2  | D | ETRIG Minimum Pulse Width                   | $t_{PW}$     | 1                            | —   | $f_{ATDCLK}$ Cycles |
|     |   | Edge-Sensitive Trigger Mode                 |              | 2                            | —   |                     |
| T3  | D | ETRIG Level Recovery <sup>2</sup>           | $t_{LR}$     | 1                            | —   | $f_{ATDCLK}$ Cycles |
| T4  | D | Conversion Start Delay                      | $t_{DLY}$    | —                            | 2   | $f_{ATDCLK}$ Cycles |

NOTES:

- $N_{CONVn}$  denotes 8- or 10-bit conversion time (refer to specifications N4, N5, P4 and P5). In order to achieve the minimum period between conversions when using level-sensitive triggering, ETRIG must remain asserted this long.
- Time prior to the end of a conversion that ETRIG must be negated in order to prevent the start of another conversion.

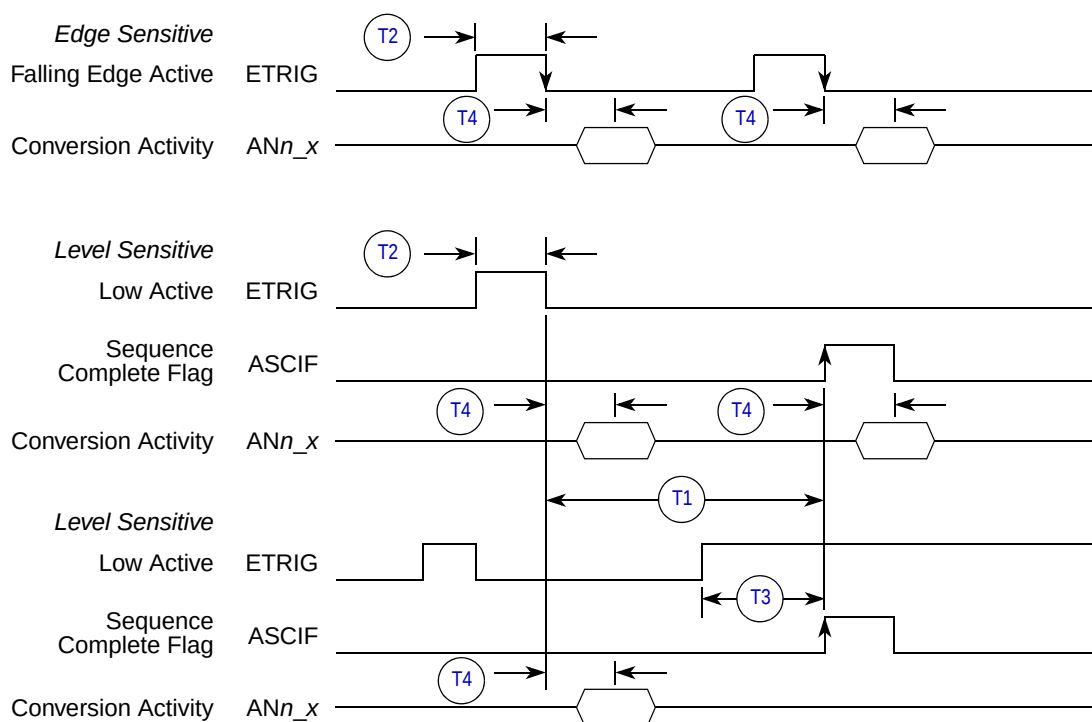


Figure 10. ATD External Trigger Timing Diagram

## 3.11 Serial Peripheral Interface

### 3.11.1 Master Mode

Master mode timing values are shown in Table 32 and illustrated in Figure 11 and Figure 12.

**Table 32. SPI Master Mode Timing Characteristics**

| Conditions are shown in Table 7 unless otherwise noted, C <sub>LOAD</sub> = 200 pF on all outputs |   |                                                                       |                        |                             |     |                            |           |
|---------------------------------------------------------------------------------------------------|---|-----------------------------------------------------------------------|------------------------|-----------------------------|-----|----------------------------|-----------|
| Num                                                                                               | C | Rating                                                                | Symbol                 | Min                         | Typ | Max                        | Unit      |
| U1a                                                                                               | P | Operating Frequency (baud rate)                                       | $f_{OP}$ <sup>1</sup>  | $\frac{1}{7 \times 32,678}$ | —   | $\frac{1}{2}$ <sup>2</sup> | $f_{IPS}$ |
| U1b                                                                                               | P | SCK Period ( $t_{SCK} = 1 \div f_{OP}$ , $t_{IPS} = 1 \div f_{IPS}$ ) | $t_{SCK}$ <sup>1</sup> | $2$ <sup>2</sup>            | —   | $7 \times 32,768$          | $t_{IPS}$ |
| U2                                                                                                | D | Enable Lead Time                                                      | $t_{lead}$             | $\frac{1}{2}$               | —   | —                          | $t_{SCK}$ |
| U3                                                                                                | D | Enable Lag Time                                                       | $t_{lag}$              | $\frac{1}{2}$               | —   | —                          | $t_{SCK}$ |
| U4                                                                                                | D | Clock (SCK) High or Low Time                                          | $t_{wsck}$             | $t_{IPS} - 30$              | —   | $1024 t_{IPS}$             | ns        |
| U5                                                                                                | D | Data Setup Time (Inputs)                                              | $t_{su}$               | 25                          | —   | —                          | ns        |
| U6                                                                                                | D | Data Hold Time (Inputs)                                               | $t_{hi}$               | 0                           | —   | —                          | ns        |
| U9                                                                                                | D | Data Valid (after Enable Edge)                                        | $t_v$                  | —                           | —   | 25                         | ns        |
| U10                                                                                               | D | Data Hold Time (Outputs)                                              | $t_{ho}$               | 0                           | —   | —                          | ns        |
| U11                                                                                               | D | Rise Time Inputs and Outputs                                          | $t_r$                  | —                           | —   | 25                         | ns        |
| U12                                                                                               | D | Fall Time Inputs and Outputs                                          | $t_f$                  | —                           | —   | 25                         | ns        |

NOTES:

1. Refer to MAC7100 Microcontroller Family Reference Manual (MAC7100RM) Chapter 22 for all available baud rates.
2. On mask set L49P and L47W devices, U1a maximum =  $\frac{1}{4}$  and U1b minimum = 4.

### 3.11.2 Slave Mode


Slave mode timing values are shown in Table 33 and illustrated in Figure 13 and Figure 14.

**Table 33. SPI Slave Mode Timing Characteristics**

| Conditions are shown in Table 7 unless otherwise noted, C <sub>LOAD</sub> = 200 pF on all outputs |   |                                                                       |            |                             |     |                            |           |
|---------------------------------------------------------------------------------------------------|---|-----------------------------------------------------------------------|------------|-----------------------------|-----|----------------------------|-----------|
| Num                                                                                               | C | Rating                                                                | Symbol     | Min                         | Typ | Max                        | Unit      |
| V1a                                                                                               | P | Operating Frequency                                                   | $f_{OP}$   | $\frac{1}{7 \times 32,678}$ | —   | $\frac{1}{2}$ <sup>1</sup> | $f_{IPS}$ |
| V1b                                                                                               | P | SCK Period ( $t_{SCK} = 1 \div f_{OP}$ , $t_{IPS} = 1 \div f_{IPS}$ ) | $t_{SCK}$  | $2$ <sup>1</sup>            | —   | $7 \times 32,768$          | $t_{IPS}$ |
| V2                                                                                                | D | Enable Lead Time                                                      | $t_{lead}$ | 1                           | —   | —                          | $t_{IPS}$ |
| V3                                                                                                | D | Enable Lag Time                                                       | $t_{lag}$  | 1                           | —   | —                          | $t_{IPS}$ |
| V4                                                                                                | D | Clock (SCK) High or Low Time                                          | $t_{wsck}$ | $t_{IPS} - 30$              | —   | —                          | ns        |
| V5                                                                                                | D | Data Setup Time (Inputs)                                              | $t_{su}$   | 25                          | —   | —                          | ns        |
| V6                                                                                                | D | Data Hold Time (Inputs)                                               | $t_{hi}$   | 25                          | —   | —                          | ns        |
| V7                                                                                                | D | Slave Access Time                                                     | $t_a$      | —                           | —   | 1                          | $t_{IPS}$ |
| V8                                                                                                | D | Slave SIN Disable Time                                                | $t_{dis}$  | —                           | —   | 1                          | $t_{IPS}$ |
| V9                                                                                                | D | Data Valid (after SCK Edge)                                           | $t_v$      | —                           | —   | 25                         | ns        |
| V10                                                                                               | D | Data Hold Time (Outputs)                                              | $t_{ho}$   | 0                           | —   | —                          | ns        |
| V11                                                                                               | D | Rise Time Inputs and Outputs                                          | $t_r$      | —                           | —   | 25                         | ns        |
| V12                                                                                               | D | Fall Time Inputs and Outputs                                          | $t_f$      | —                           | —   | 25                         | ns        |


NOTES:

1. On mask set L49P and L47W devices, V1a maximum =  $\frac{1}{4}$  and V1b minimum = 4.

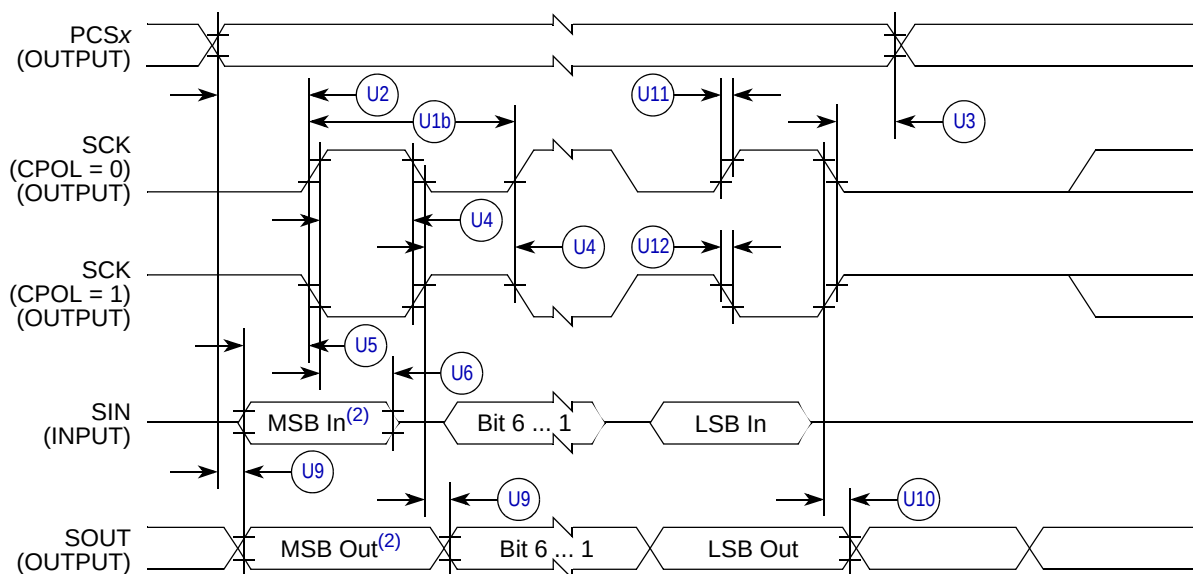

1. If configured as output.
2. LSBFE = 0. For LSBFE = 1, bit order is LSB, bit 1, ..., bit 6, MSB.

**Figure 11. SPI Master Timing (CPHA = 0)**

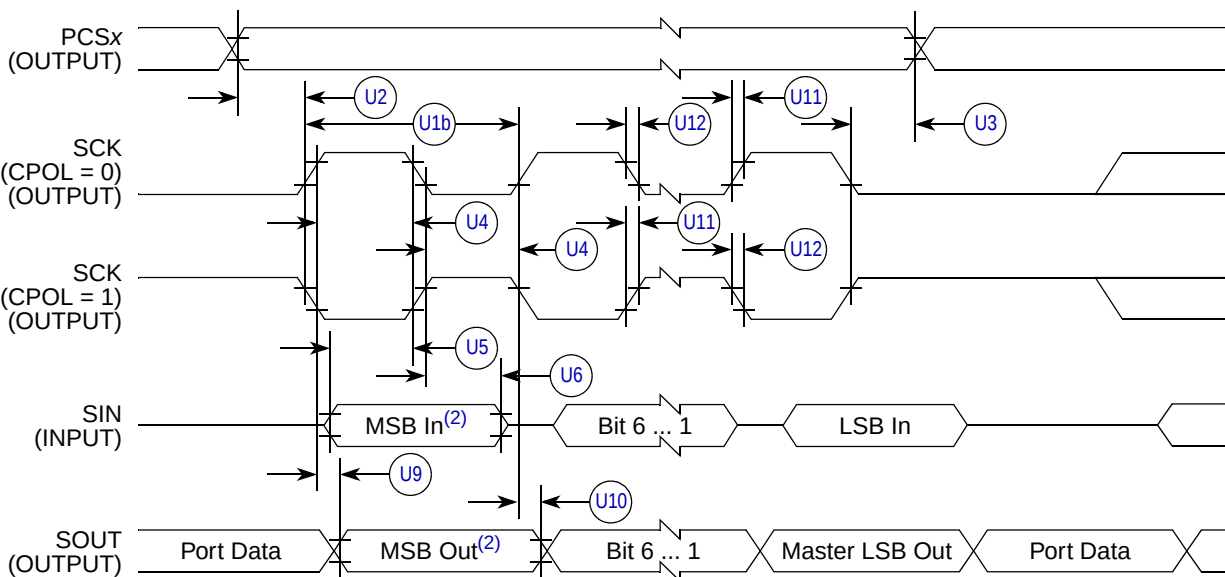

1. If configured as output.
2. LSBFE = 0. For LSBFE = 1, bit order is LSB, bit 1, ..., bit 6, MSB.

**Figure 12. SPI Master Timing (CPHA = 1)**

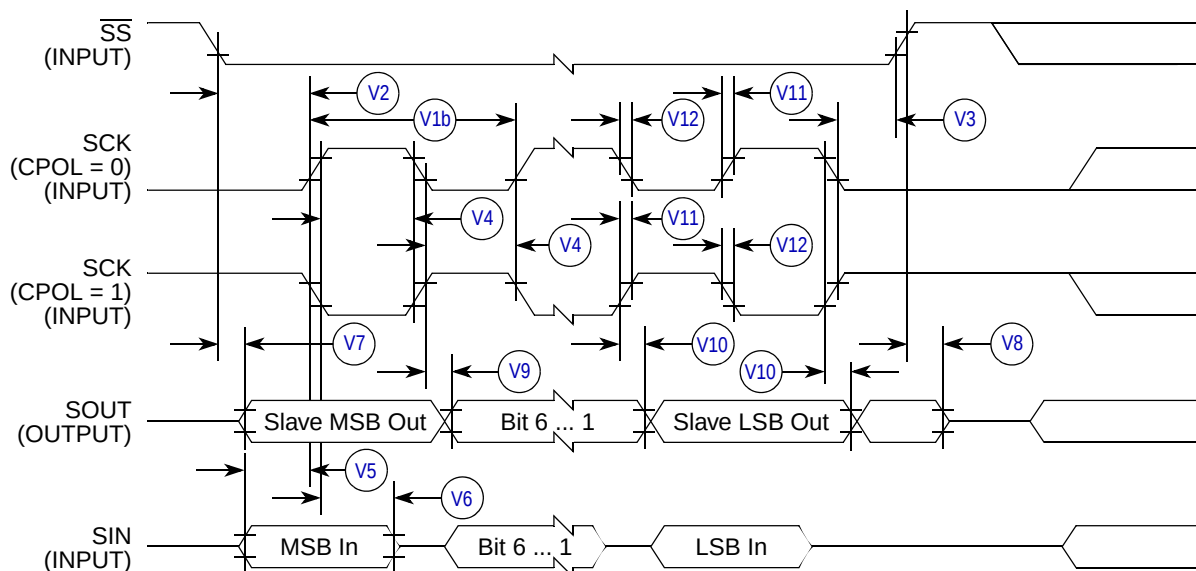


Figure 13. SPI Slave Timing (CPHA = 0)

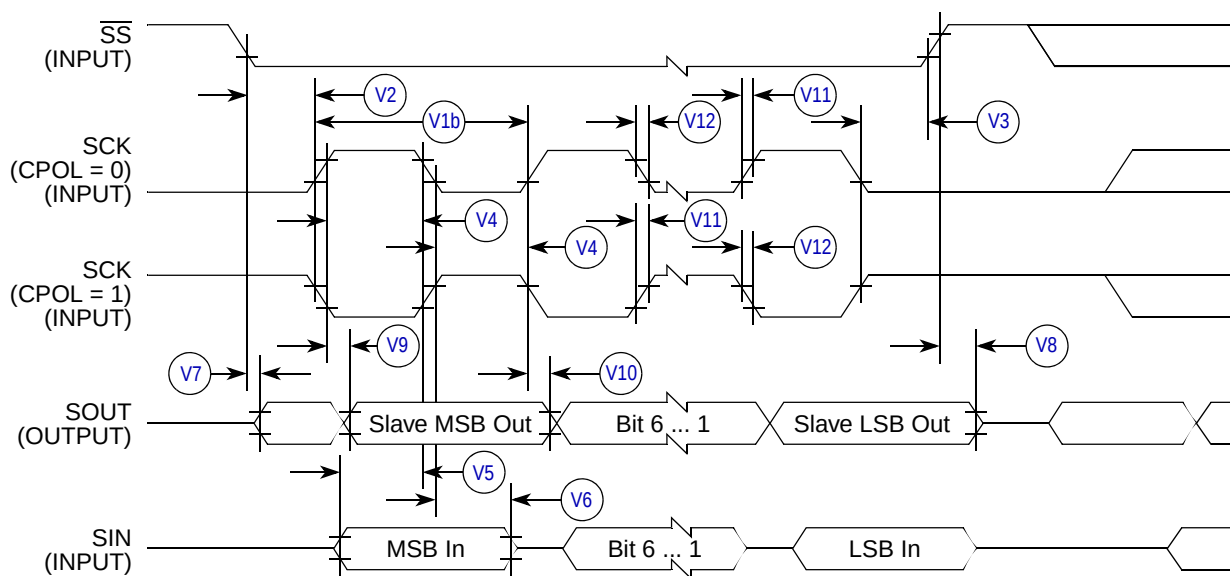


Figure 14. SPI Slave Timing (CPHA = 1)

## 3.12 FlexCAN Interface

Table 34. FlexCAN Wake-up Pulse Characteristics

| Conditions are shown in Table 7 unless otherwise noted |   |                                         |           |     |     |     |               |
|--------------------------------------------------------|---|-----------------------------------------|-----------|-----|-----|-----|---------------|
| Num                                                    | C | Rating                                  | Symbol    | Min | Typ | Max | Unit          |
| W1                                                     | P | FlexCAN Wake-up dominant pulse filtered | $t_{WUP}$ | —   | —   | 2   | $\mu\text{s}$ |
| W2                                                     | P | FlexCAN Wake-up dominant pulse passed   | $t_{WUP}$ | 5   | —   | —   | $\mu\text{s}$ |

## 3.13 Common Flash Module

### NOTE

Unless otherwise noted the abbreviation NVM (Non-Volatile Memory) is used for both program Flash and data Flash.

The time base for all program and data Flash operations,  $f_{NVMOP}$  is derived from the IPS bus clock,  $f_{IPS}$ , using the CFMCLKD register to control the divider ratio. Throughout this section,  $t_{IPS}$  refers to  $1 \div f_{IPS}$ , and  $t_{NVMOP}$  refers to  $1 \div f_{NVMOP}$ . An  $f_{NVMOP}$  frequency range limit is imposed for performing program or erase operations. The CFM does not monitor the frequency and will not prevent program or erase operation at frequencies above or below the following limits:

$$150 \text{ KHz} < f_{NVMOP} \leq 200 \text{ KHz} \quad \text{Eqn. 19}$$

$f_{NVMOP} = 200 \text{ KHz}$  gives the fastest program and erase performance. Setting CFMCLKD to a value such that  $f_{NVMOP} < 150 \text{ KHz}$  should be avoided, as this can damage the Flash memory due to overstress. Setting CFMCLKD to a value such that  $f_{NVMOP} > 200 \text{ KHz}$  can result in incomplete programming or erasure of the Flash memory array cells.

### 3.13.1 Mass Erase Timing

The time required to erase the entire NVM array (both program and data) is calculated using the formula:

$$t_{\text{mass}} \approx 20000 \cdot t_{NVMOP} \quad \text{Eqn. 20}$$

The setup time can be ignored for this operation.

### 3.13.2 Blank Check Timing

The time it takes to perform a blank check on the program or data Flash is dependant on the location of the first non-blank word, starting from relative address zero. One  $f_{IPS}$  cycle is required per word to be verified, and the time required for the operation is calculated using the formula:

$$t_{\text{check}} = (\text{locations} + 15) \cdot t_{IPS} \quad \text{Eqn. 21}$$



### 3.13.3 Page Erase Timing

The time required to erase a 4 Kbyte program or 1 Kbyte data Flash logical page is calculated using the formulas:

$$t_{\text{erap}} = 4096 \cdot t_{\text{NVMOP}} + 15 \cdot t_{\text{IPS}} \quad \text{Eqn. 22}$$

$$t_{\text{erad}} = 1024 \cdot t_{\text{NVMOP}} + 15 \cdot t_{\text{IPS}} \quad \text{Eqn. 23}$$

### 3.13.4 Page Erase Verify Timing

The time required to verify that a program Flash page is erased depends on the location of the first non-blank word. The time required for the operation is calculated using the formula:

$$t_{\text{pevp}} = \left[ \left( \frac{4 \times 1024}{4} \right) + 15 \right] \times t_{\text{IPS}} \quad \text{Eqn. 24}$$

The time required to verify that a data Flash page is erased is calculated using the formula:

$$t_{\text{pevd}} = \left[ \left( \frac{1 \times 1024}{4} \right) + 15 \right] \times t_{\text{IPS}} \quad \text{Eqn. 25}$$

### 3.13.5 Programming Timing

Programming time is dependant on the  $f_{\text{IPS}}$  and  $f_{\text{NVMOP}}$  frequencies, and is calculated for a single word using the formula:

$$t_{\text{swpgm}} = 9 \cdot t_{\text{NVMOP}} + 25 \cdot t_{\text{IPS}} \quad \text{Eqn. 26}$$

Burst programming can be utilized with the program Flash, where up to 32 words in a row can be programmed consecutively by keeping the command pipeline filled. The time to program a consecutive word is calculated using the formula:

$$t_{\text{bwpgm}} = 4 \cdot t_{\text{NVMOP}} + 9 \cdot t_{\text{IPS}} \quad \text{Eqn. 27}$$

Therefore, the time to program a 32-word row is calculated using the formula:

$$t_{\text{brpgm}} = t_{\text{swpgm}} + 31 \cdot t_{\text{bwpgm}} \quad \text{Eqn. 28}$$

Note that burst programming is more than 2 times faster than single word programming.

### 3.13.6 Data Signature Timing<sup>1</sup>

The time required to perform a data signature command is dependant on the number of words or half-words compressed during the operation, and is calculated using the formula:

$$t_{\text{dsig}} = (\text{Words or Half-Words} + 15) \cdot t_{\text{IPS}} \quad \text{Eqn. 29}$$

1. This feature is not available on mask set L49P and L47W devices.

### 3.13.7 CFM Timing Specifications

Table 35 lists the time required to execute various operations described in the Section 3.13.1 through Section 3.13.6. For operating conditions other than those assumed below, Equation 19 through Equation 29 must be used to calculate the timing for specific commands under those conditions.

**Table 35. CFM Timing Characteristics**

| Conditions are shown in Table 7 unless otherwise noted |   |                                                           |                   |                            |     |                 |               |
|--------------------------------------------------------|---|-----------------------------------------------------------|-------------------|----------------------------|-----|-----------------|---------------|
| Num                                                    | C | Rating                                                    | Symbol            | Min                        | Typ | Max             | Unit          |
| X1                                                     | D | System Clock                                              | $f_{NVM/f_{sys}}$ | 0.5                        | —   | 50 <sup>1</sup> | MHz           |
| X2                                                     | D | Bus frequency for Programming or Erase Operations         | $f_{NVM/f_{ips}}$ | 1                          | —   | —               | MHz           |
| X3                                                     | D | Program/Erase Operating Frequency                         | $f_{NVMOP}$       | 150                        | —   | 200             | kHz           |
| X4                                                     | P | Programming Time, <sup>2</sup><br>Single Word             | $t_{swpgm}$       | $f_{sys} = 50 \text{ MHz}$ | —   | 71.0            | $\mu\text{s}$ |
|                                                        |   |                                                           |                   | $f_{sys} = 40 \text{ MHz}$ | —   | 71.0            |               |
| X5                                                     | D | Programming Time, <sup>2</sup><br>Consecutive Word Burst  | $t_{bwpgm}$       | $f_{sys} = 50 \text{ MHz}$ | —   | 30.5            | $\mu\text{s}$ |
|                                                        |   |                                                           |                   | $f_{sys} = 40 \text{ MHz}$ | —   | 30.5            |               |
| X6                                                     | D | Programming Time, <sup>2</sup><br>32-word Row Burst       | $t_{brpgm}$       | $f_{sys} = 50 \text{ MHz}$ | —   | 1,016.5         | $\mu\text{s}$ |
|                                                        |   |                                                           |                   | $f_{sys} = 40 \text{ MHz}$ | —   | 1,016.5         |               |
| X7a                                                    | P | Page Erase Time, <sup>2</sup><br>Program Flash            | $t_{erap}$        | $f_{sys} = 50 \text{ MHz}$ | —   | 26.6            | ms            |
|                                                        |   |                                                           |                   | $f_{sys} = 40 \text{ MHz}$ | —   | 26.6            |               |
| X7b                                                    | P | Page Erase Time, <sup>2</sup><br>Data Flash               | $t_{erad}$        | $f_{sys} = 50 \text{ MHz}$ | —   | 6.7             | ms            |
|                                                        |   |                                                           |                   | $f_{sys} = 40 \text{ MHz}$ | —   | 6.7             |               |
| X8                                                     | P | Mass Erase Time <sup>2</sup>                              | $t_{mass}$        | 100                        | —   | 130             | ms            |
| X9a                                                    | D | Blank Check Time, <sup>3</sup><br>Program Flash per Block | $t_{bcheckp}$     | MAC71x1, MAC71x6           | —   | 131,087         | $t_{ips}$     |
|                                                        |   |                                                           |                   | MAC71x2                    | —   | 65,551          |               |
| X9b                                                    | D | Blank Check Time, <sup>3</sup><br>Data Flash per Block    | $t_{bcheckd}$     | 16                         | —   | 8,207           | $t_{ips}$     |
| X9c                                                    | D | Page Erase Verify Time <sup>3</sup>                       | Program Flash     | $t_{pevp}$                 | —   | 1,039           | $t_{ips}$     |
|                                                        |   |                                                           | Data Flash        | $t_{pevd}$                 | —   | 271             |               |
| X10                                                    | D | Data Signature Time <sup>4</sup>                          | MAC71x6, Program  | $t_{dsig}$                 | —   | 262,159         | $t_{ips}$     |
|                                                        |   |                                                           | MAC71x1, Program  |                            | —   | 131,087         |               |
|                                                        |   |                                                           | MAC71x2, Program  |                            | —   | 65,551          |               |
|                                                        |   |                                                           | MAC71xx, Data     |                            | —   | 16,399          |               |

**NOTES:**

- Subject to restrictions in Table 19 and Table 20 for operating characteristics of the oscillator and PLL.
- Minimum erase and programming times are achieved with the indicated maximum  $f_{sys}$  (which is  $f_{ips} \times 2$ , and subject to the limits of Table 19 and Table 20) and corresponding maximum  $f_{NVMOP}$ . Maximum erase and programming times are dependent on the combination of  $f_{NVMOP}$  and  $f_{ips}$ ; values shown are calculated for  $f_{ips} = 2 \text{ MHz}$  and  $f_{NVMOP} = 154 \text{ kHz}$ .
- Minimum blank check or page erase verify time assumes the first word in the array is blank and the second is not. Maximum blank check or page erase verify time assumes the entire block or page is blank.
- Data signature timing is dependant on the number of words or half-words compressed for the program and data arrays, respectively. Minimum time is for two words or half-words; maximum time is for the entire array.

### 3.13.8 NVM Reliability

The reliability of the NVM blocks is guaranteed by stress test during qualification, constant process monitors and burn-in to screen early life failures. The failure rates for data retention and program/erase cycling are specified at the operating conditions noted. The program/erase cycle count on the sector is incremented every time a sector or mass erase event is executed.

**Table 36. NVM Reliability Characteristics**

| Conditions shown in <a href="#">Table 7</a> unless otherwise noted. |   |                                                            |        |        |
|---------------------------------------------------------------------|---|------------------------------------------------------------|--------|--------|
| Num                                                                 | C | Rating                                                     | Min    | Unit   |
| X11                                                                 | C | Program/Data Flash Program/Erase endurance (–40C to +125C) | 10,000 | Cycles |
| X12                                                                 | C | Program/Data Flash Data Retention Lifetime                 | 15     | Years  |

**NOTE**

All values shown in [Table 36](#) are target values and subject to characterization. For Flash cycling performance, each program operation must be preceded by an erase.

## 4 Device Pin Assignments

The MAC7100 Family is available in 208-pin ball grid array (MAP BGA), 144-pin low profile quad flat (LQFP), 112-pin LQFP, and 100-pin LQFP package options. The family of devices offer pin-compatible packaged devices to assist with system development and accommodate a direct application enhancement path. Refer to [Table 2](#) for a comparison of the peripheral sets and package options for each device.

Most pins perform two or more functions, which are described in more detail in the *MAC7100 Microcontroller Family Reference Manual* (MAC7100RM). [Table 37](#), [Table 38](#) and [Figure 15](#) through [Figure 22](#) show the pin assignments for various devices and packages.

**Table 37. Signal Pin Assignments**

| Primary /<br>GPIO<br>Function | Peripheral<br>Function <sup>1</sup> | External<br>Bus<br>Function <sup>1</sup> | Debug<br>Function <sup>1</sup> | Read on<br>Reset | Pin Number (by Device) |              |      |              |      |      |      |              |
|-------------------------------|-------------------------------------|------------------------------------------|--------------------------------|------------------|------------------------|--------------|------|--------------|------|------|------|--------------|
|                               |                                     |                                          |                                |                  | 7101<br>7106           | 7111<br>7116 | 7112 | 7121<br>7126 | 7122 | 7131 | 7136 | 7141<br>7142 |
| EXTAL                         | —                                   | —                                        | —                              | —                | 60                     | 60           | 60   | 48           | 48   | T10  | T10  | 45           |
| XTAL                          | —                                   | —                                        | —                              | —                | 61                     | 61           | 61   | 49           | 49   | T11  | T11  | 46           |
| XFC                           | —                                   | —                                        | —                              | —                | 58                     | 58           | 58   | 46           | 46   | T9   | T9   | 43           |
| RESET                         | —                                   | —                                        | —                              | —                | 48                     | 48           | 48   | 36           | 36   | T7   | T7   | 33           |
| TDI                           | —                                   | —                                        | —                              | —                | 128                    | 128          | 128  | 102          | 102  | A8   | A8   | 93           |
| TDO                           | —                                   | —                                        | —                              | —                | 129                    | 129          | 129  | 103          | 103  | B8   | B8   | 94           |
| TCK                           | —                                   | —                                        | —                              | —                | 130                    | 130          | 130  | 104          | 104  | A7   | A7   | 95           |
| TMS                           | —                                   | —                                        | —                              | —                | 131                    | 131          | 131  | 105          | 105  | B7   | B7   | 96           |
| —                             | —                                   | TA / AS <sup>2</sup>                     | —                              | —                | —                      | 79           | —    | —            | —    | M14  | M14  | —            |
| PA0                           | —                                   | DATA0 <sup>3</sup>                       | MCKO <sup>4</sup>              | —                | 138                    | 138          | 138  | 106          | 106  | B5   | B5   | —            |
| PA1                           | —                                   | DATA1 <sup>3</sup>                       | EVTO                           | —                | 137                    | 137          | 137  | —            | —    | C5   | C5   | —            |
| PA2                           | —                                   | DATA2 <sup>3</sup>                       | EVTI                           | —                | 136                    | 136          | 136  | —            | —    | A5   | A5   | —            |
| PA3                           | —                                   | DATA3 <sup>3</sup>                       | MDO0                           | —                | 135                    | 135          | 135  | —            | —    | C6   | C6   | —            |
| PA4                           | —                                   | DATA4 <sup>3</sup>                       | MDO1                           | —                | 134                    | 134          | 134  | —            | —    | B6   | B6   | —            |
| PA5                           | —                                   | DATA5 <sup>3</sup>                       | MSEO                           | —                | 133                    | 133          | 133  | —            | —    | A6   | A6   | —            |
| PA6                           | —                                   | DATA6 <sup>3</sup>                       | RDY                            | —                | 132                    | 132          | 132  | —            | —    | C7   | C7   | —            |
| PA7                           | —                                   | DATA7 <sup>3</sup>                       | —                              | —                | —                      | 98           | 98   | 74           | 74   | H15  | H15  | 65           |
| PA8                           | —                                   | DATA8 <sup>3</sup>                       | —                              | —                | —                      | 97           | 97   | 73           | 73   | H13  | H13  | 64           |
| PA9                           | —                                   | DATA9 <sup>3</sup>                       | —                              | —                | —                      | 96           | 96   | 72           | 72   | H14  | H14  | 63           |
| PA10                          | —                                   | DATA10 <sup>3</sup>                      | —                              | —                | —                      | 95           | 95   | 71           | 71   | H16  | H16  | —            |
| PA11                          | —                                   | DATA11 <sup>3</sup>                      | —                              | —                | —                      | 94           | 94   | 70           | 70   | J15  | J15  | —            |
| PA12                          | —                                   | DATA12 <sup>3</sup>                      | —                              | —                | —                      | 93           | 93   | 69           | 69   | J14  | J14  | —            |
| PA13                          | —                                   | DATA13 <sup>3</sup>                      | —                              | —                | 67                     | 67           | 67   | 53           | 53   | R12  | R12  | —            |
| PA14                          | —                                   | DATA14 <sup>3</sup>                      | —                              | PS <sup>3</sup>  | 66                     | 66           | 66   | 52           | 52   | T12  | T12  | —            |
| PA15                          | —                                   | DATA15 <sup>3</sup>                      | —                              | AA <sup>3</sup>  | 65                     | 65           | 65   | 51           | 51   | P11  | P11  | 48           |
| PB0                           | SDA                                 | —                                        | —                              | —                | 15                     | 15           | 15   | 11           | 11   | G1   | G1   | 8            |
| PB1                           | SCL                                 | —                                        | —                              | —                | 16                     | 16           | 16   | 12           | 12   | H3   | H3   | 9            |
| PB2                           | SIN_A                               | —                                        | —                              | —                | 17                     | 17           | 17   | 13           | 13   | H2   | H2   | 10           |
| PB3                           | SOUT_A                              | —                                        | —                              | —                | 18                     | 18           | 18   | 14           | 14   | H1   | H1   | 11           |
| PB4                           | SCK_A                               | —                                        | —                              | —                | 19                     | 19           | 19   | 15           | 15   | J3   | J3   | 12           |
| PB5                           | PCS0_A /<br>SS_A                    | —                                        | —                              | —                | 20                     | 20           | 20   | 16           | 16   | J1   | J1   | 13           |
| PB6                           | PCS1_A                              | —                                        | —                              | —                | 21                     | 21           | 21   | 17           | 17   | J2   | J2   | 14           |
| PB7                           | PCS2_A                              | —                                        | —                              | —                | 22                     | 22           | 22   | 18           | 18   | K1   | K1   | 15           |

Table 37. Signal Pin Assignments (continued)

| Primary /<br>GPIO<br>Function | Peripheral<br>Function <sup>1</sup> | External<br>Bus<br>Function <sup>1</sup> | Debug<br>Function <sup>1</sup> | Read on<br>Reset | Pin Number (by Device) |              |      |                 |      |      |      |              |
|-------------------------------|-------------------------------------|------------------------------------------|--------------------------------|------------------|------------------------|--------------|------|-----------------|------|------|------|--------------|
|                               |                                     |                                          |                                |                  | 7101<br>7106           | 7111<br>7116 | 7112 | 7121<br>7126    | 7122 | 7131 | 7136 | 7141<br>7142 |
| PB8                           | PCS5_A /<br>PCSS_A                  | —                                        | —                              | —                | 23                     | 23           | 23   | 19              | 19   | K2   | K2   | 16           |
| PB9                           | PCS0_B /<br>SS_B                    | —                                        | —                              | —                | 72                     | 72           | 72   | 56              | 56   | T14  | T14  | 51           |
| PB10                          | PCS5_B /<br>PCSS_B                  | —                                        | —                              | —                | 73                     | 73           | 73   | 57 <sup>5</sup> | 57   | R14  | R14  | 52           |
| PB11                          | PCS2_B                              | —                                        | —                              | —                | 74                     | 74           | 74   | — <sup>5</sup>  | —    | N14  | N14  | 53           |
| PB12                          | PCS1_B                              | —                                        | —                              | —                | 75                     | 75           | 75   | 58              | 58   | P15  | P15  | 54           |
| PB13                          | SCK_B                               | —                                        | —                              | —                | 76                     | 76           | 76   | 59              | 59   | P16  | P16  | 55           |
| PB14                          | SOUT_B                              | —                                        | —                              | —                | 77                     | 77           | 77   | 60              | 60   | N15  | N15  | 56           |
| PB15                          | SIN_B                               | —                                        | —                              | —                | 78                     | 78           | 78   | 61              | 61   | N16  | N16  | 57           |
| PC0                           | —                                   | ADDR0 <sup>3</sup>                       | —                              | —                | 9                      | 9            | 9    | —               | —    | F1   | F1   | —            |
| PC1                           | —                                   | ADDR1 <sup>3</sup>                       | —                              | —                | 10                     | 10           | 10   | —               | —    | F3   | F3   | —            |
| PC2                           | —                                   | ADDR2 <sup>3</sup>                       | —                              | —                | 11                     | 11           | 11   | —               | —    | G2   | G2   | —            |
| PC3                           | —                                   | ADDR3 <sup>3</sup>                       | —                              | —                | 12                     | 12           | 12   | —               | —    | G3   | G3   | —            |
| PC4                           | —                                   | ADDR4 <sup>3</sup>                       | —                              | —                | 28                     | 28           | 28   | —               | —    | L3   | L3   | —            |
| PC5                           | —                                   | ADDR5 <sup>3</sup>                       | —                              | —                | 29                     | 29           | 29   | —               | —    | M2   | M2   | —            |
| PC6                           | —                                   | ADDR6 <sup>3</sup>                       | —                              | —                | 30                     | 30           | 30   | —               | —    | M3   | M3   | —            |
| PC7                           | —                                   | ADDR7 <sup>3</sup>                       | —                              | —                | 31                     | 31           | 31   | —               | —    | N3   | N3   | —            |
| PC8                           | —                                   | ADDR8 <sup>3</sup>                       | —                              | —                | 44                     | 44           | 44   | —               | —    | P5   | P5   | —            |
| PC9                           | —                                   | ADDR9 <sup>3</sup>                       | —                              | —                | 45                     | 45           | 45   | —               | —    | R6   | R6   | —            |
| PC10                          | —                                   | ADDR10 <sup>3</sup>                      | —                              | —                | 46                     | 46           | 46   | —               | —    | P6   | P6   | —            |
| PC11                          | —                                   | ADDR11 <sup>3</sup>                      | —                              | —                | 47                     | 47           | 47   | —               | —    | T6   | T6   | —            |
| PC12                          | —                                   | ADDR12 <sup>3</sup>                      | —                              | —                | —                      | 88           | 88   | —               | —    | K14  | K14  | —            |
| PC13                          | —                                   | ADDR13 <sup>3</sup>                      | —                              | —                | —                      | 89           | 89   | —               | —    | K13  | K13  | —            |
| PC14                          | —                                   | ADDR14 <sup>3</sup>                      | —                              | —                | —                      | 90           | 90   | —               | —    | K15  | K15  | —            |
| PC15                          | —                                   | ADDR15 <sup>3</sup>                      | —                              | —                | —                      | 91           | 91   | 67              | 67   | J16  | J16  | —            |
| PD0                           | —                                   | BS0 <sup>3</sup>                         | —                              | MODB             | 70                     | 70           | 70   | 54              | 54   | T13  | T13  | 49           |
| PD1                           | —                                   | BS1 <sup>3</sup>                         | —                              | MODA             | 71                     | 71           | 71   | 55              | 55   | R13  | R13  | 50           |
| PD2 <sup>6</sup>              | —                                   | CLKOUT                                   | —                              | XCLKS            | 80                     | 80           | 80   | 62              | 62   | M16  | M16  | 58           |
| PD3                           | XIRQ                                | —                                        | —                              | —                | 81                     | 81           | 81   | 63              | 63   | M15  | M15  | 59           |
| PD4                           | IRQ                                 | —                                        | —                              | —                | 82                     | 82           | 82   | 64              | 64   | L16  | L16  | 60           |
| PD5                           | —                                   | ADDR16 <sup>3</sup>                      | —                              | —                | —                      | 92           | 92   | 68              | 68   | J13  | J13  | —            |
| PD6                           | —                                   | ADDR17 <sup>3</sup>                      | —                              | —                | —                      | 119          | 119  | 95              | 95   | C10  | C10  | 86           |
| PD7                           | —                                   | ADDR18 <sup>3</sup>                      | —                              | —                | —                      | 120          | 120  | 96              | 96   | D10  | D10  | 87           |
| PD8                           | —                                   | ADDR19 <sup>3</sup>                      | —                              | —                | —                      | 121          | 121  | 97              | 97   | D9   | D9   | 88           |
| PD9                           | —                                   | ADDR20 <sup>3</sup>                      | —                              | —                | —                      | 122          | 122  | 98              | 98   | B9   | B9   | 89           |
| PD10                          | —                                   | ADDR21 <sup>3</sup>                      | —                              | —                | —                      | 123          | 123  | 99              | 99   | D8   | D8   | 90           |
| PD11                          | —                                   | OE <sup>3</sup>                          | —                              | —                | 68                     | 68           | 68   | —               | —    | P12  | P12  | —            |
| PD12                          | —                                   | CS2 <sup>3</sup>                         | —                              | —                | 69                     | 69           | 69   | —               | —    | P13  | P13  | —            |
| PD13                          | —                                   | CS1 <sup>3</sup>                         | —                              | —                | 83                     | 83           | 83   | —               | —    | L13  | L13  | —            |
| PD14                          | —                                   | CS0 <sup>3</sup>                         | —                              | —                | 84                     | 84           | 84   | —               | —    | L14  | L14  | —            |
| PD15                          | —                                   | R/W <sup>3</sup>                         | —                              | —                | 85                     | 85           | 85   | —               | —    | L15  | L15  | —            |
| PE0                           | AN0_A                               | —                                        | MCKO'                          | —                | 89                     | 99           | 99   | 75              | 75   | G16  | G16  | 66           |
| PE1                           | AN1_A                               | —                                        | EVTO'                          | —                | 91                     | 100          | 100  | 76              | 76   | G15  | G15  | 67           |

Table 37. Signal Pin Assignments (continued)

| Primary /<br>GPIO<br>Function | Peripheral<br>Function <sup>1</sup> | External<br>Bus<br>Function <sup>1</sup> | Debug<br>Function <sup>1</sup> | Read on<br>Reset | Pin Number (by Device) |              |      |              |      |      |      |              |
|-------------------------------|-------------------------------------|------------------------------------------|--------------------------------|------------------|------------------------|--------------|------|--------------|------|------|------|--------------|
|                               |                                     |                                          |                                |                  | 7101<br>7106           | 7111<br>7116 | 7112 | 7121<br>7126 | 7122 | 7131 | 7136 | 7141<br>7142 |
| PE2                           | AN2_A                               | —                                        | EVTI'                          | —                | 93                     | 101          | 101  | 77           | 77   | F13  | F13  | 68           |
| PE3                           | AN3_A                               | —                                        | MDO0'                          | —                | 95                     | 102          | 102  | 78           | 78   | F14  | F14  | 69           |
| PE4                           | AN4_A                               | —                                        | MDO1'                          | —                | 97                     | 103          | 103  | 79           | 79   | E13  | E13  | 70           |
| PE5                           | AN5_A                               | —                                        | MSEO'                          | —                | 99                     | 104          | 104  | 80           | 80   | E14  | E14  | 71           |
| PE6                           | AN6_A                               | —                                        | RDY'                           | —                | 101                    | 105          | 105  | 81           | 81   | D15  | D15  | 72           |
| PE7                           | AN7_A                               | —                                        | —                              | —                | 103                    | 106          | 106  | 82           | 82   | C15  | C15  | 73           |
| PE8                           | AN8_A                               | —                                        | —                              | —                | 105                    | 107          | 107  | 83           | 83   | C14  | C14  | 74           |
| PE9                           | AN9_A                               | —                                        | —                              | —                | 107                    | 108          | 108  | 84           | 84   | D14  | D14  | 75           |
| PE10                          | AN10_A                              | —                                        | —                              | —                | 113                    | 113          | 113  | 89           | 89   | B13  | B13  | 80           |
| PE11                          | AN11_A                              | —                                        | —                              | —                | 115                    | 114          | 114  | 90           | 90   | C12  | C12  | 81           |
| PE12                          | AN12_A                              | —                                        | —                              | —                | 117                    | 115          | 115  | 91           | 91   | A12  | A12  | 82           |
| PE13                          | AN13_A                              | —                                        | —                              | —                | 119                    | 116          | 116  | 92           | 92   | B11  | B11  | 83           |
| PE14                          | AN14_A                              | —                                        | —                              | —                | 121                    | 117          | 117  | 93           | 93   | A10  | A10  | 84           |
| PE15                          | AN15_A                              | —                                        | —                              | —                | 123                    | 118          | 118  | 94           | 94   | A9   | A9   | 85           |
| PF0                           | eMIOS0                              | —                                        | Debug Status <sup>7</sup>      | NEXPS            | 43                     | 43           | 43   | 35           | 35   | T5   | T5   | 32           |
| PF1                           | eMIOS1                              | —                                        | Debug Status <sup>7</sup>      | NEXPR            | 42                     | 42           | 42   | 34           | 34   | R5   | R5   | 31           |
| PF2                           | eMIOS2                              | —                                        | Debug Status <sup>7</sup>      | —                | 41                     | 41           | 41   | 33           | 33   | T4   | T4   | 30           |
| PF3                           | eMIOS3                              | —                                        | Debug Status <sup>7</sup>      | —                | 40                     | 40           | 40   | 32           | 32   | R4   | R4   | 29           |
| PF4                           | eMIOS4                              | —                                        | Debug Status <sup>7</sup>      | —                | 39                     | 39           | 39   | 31           | 31   | T3   | T3   | 28           |
| PF5                           | eMIOS5                              | —                                        | Debug Status <sup>7</sup>      | —                | 38                     | 38           | 38   | 30           | 30   | P4   | P4   | 27           |
| PF6                           | eMIOS6                              | —                                        | Debug Status <sup>7</sup>      | —                | 37                     | 37           | 37   | 29           | 29   | R3   | R3   | 26           |
| PF7                           | eMIOS7                              | —                                        | Debug Status <sup>7</sup>      | —                | 36                     | 36           | 36   | 28           | 28   | R1   | R1   | 25           |
| PF8                           | eMIOS8                              | —                                        | Debug Status <sup>7</sup>      | —                | 35                     | 35           | 35   | 27           | 27   | P2   | P2   | 24           |
| PF9                           | eMIOS9                              | —                                        | Debug Status <sup>7</sup>      | —                | 34                     | 34           | 34   | 26           | 26   | P1   | P1   | 23           |
| PF10                          | eMIOS10                             | —                                        | Debug Status <sup>7</sup>      | —                | 33                     | 33           | 33   | 25           | 25   | N2   | N2   | 22           |
| PF11                          | eMIOS11                             | —                                        | Debug Status <sup>7</sup>      | —                | 32                     | 32           | 32   | 24           | 24   | N1   | N1   | 21           |
| PF12                          | eMIOS12                             | —                                        | Debug Status <sup>7</sup>      | —                | 27                     | 27           | 27   | 23           | 23   | M1   | M1   | 20           |
| PF13                          | eMIOS13                             | —                                        | Debug Status <sup>7</sup>      | —                | 26                     | 26           | 26   | 22           | 22   | L2   | L2   | 19           |
| PF14                          | eMIOS14                             | —                                        | Debug Status <sup>7</sup>      | —                | 25                     | 25           | 25   | 21           | 21   | L1   | L1   | 18           |
| PF15                          | eMIOS15                             | —                                        | Debug Status <sup>7</sup>      | —                | 24                     | 24           | 24   | 20           | 20   | K3   | K3   | 17           |
| PG0                           | RXD_B                               | —                                        | —                              | —                | 141                    | 141          | 141  | 109          | 109  | A3   | A3   | 97           |
| PG1                           | TXD_B                               | —                                        | —                              | —                | 142                    | 142          | 142  | 110          | 110  | C4   | C4   | 98           |
| PG2                           | RXD_A                               | —                                        | —                              | —                | 143                    | 143          | 143  | 111          | 111  | B3   | B3   | 99           |
| PG3                           | TXD_A                               | —                                        | —                              | —                | 144                    | 144          | 144  | 112          | 112  | C2   | C2   | 100          |
| PG4                           | CNTX_A                              | —                                        | —                              | —                | 1                      | 1            | 1    | 1            | 1    | D3   | D3   | 1            |
| PG5                           | CNRX_A                              | —                                        | —                              | —                | 2                      | 2            | 2    | 2            | 2    | C1   | C1   | 2            |
| PG6                           | CNTX_B                              | —                                        | —                              | —                | 7                      | 7            | 7    | 7            | 7    | E1   | E1   | 3            |
| PG7                           | CNRX_B                              | —                                        | —                              | —                | 8                      | 8            | 8    | 8            | 8    | F2   | F2   | 4            |
| PG8                           | CNTX_C <sup>8</sup>                 | —                                        | —                              | —                | 3                      | 3            | 3    | 3            | 3    | D2   | D2   | —            |
| PG9                           | CNRX_C <sup>8</sup>                 | —                                        | —                              | —                | 4                      | 4            | 4    | 4            | 4    | D1   | D1   | —            |
| PG10                          | CNTX_D <sup>8</sup>                 | —                                        | —                              | —                | 5                      | 5            | 5    | 5            | 5    | E3   | E3   | —            |
| PG11                          | CNRX_D <sup>8</sup>                 | —                                        | —                              | —                | 6                      | 6            | 6    | 6            | 6    | E2   | E2   | —            |
| PG12                          | RXD_D <sup>8</sup>                  | —                                        | —                              | —                | 51                     | 51           | 51   | 39           | 39   | R7   | R7   | 36           |
| PG13                          | TXD_D <sup>8</sup>                  | —                                        | —                              | —                | 52                     | 52           | 52   | 40           | 40   | R8   | R8   | 37           |

Table 37. Signal Pin Assignments (continued)

| Primary /<br>GPIO<br>Function | Peripheral<br>Function <sup>1</sup> | External<br>Bus<br>Function <sup>1</sup> | Debug<br>Function <sup>1</sup> | Read on<br>Reset | Pin Number (by Device) |              |      |              |      |      |      |              |
|-------------------------------|-------------------------------------|------------------------------------------|--------------------------------|------------------|------------------------|--------------|------|--------------|------|------|------|--------------|
|                               |                                     |                                          |                                |                  | 7101<br>7106           | 7111<br>7116 | 7112 | 7121<br>7126 | 7122 | 7131 | 7136 | 7141<br>7142 |
| PG14                          | RXD_C                               | —                                        | —                              | —                | 139                    | 139          | 139  | 107          | 107  | A4   | A4   | —            |
| PG15                          | TXD_C                               | —                                        | —                              | —                | 140                    | 140          | 140  | 108          | 108  | B4   | B4   | —            |
| PH0                           | AN0_B                               | —                                        | —                              | —                | 88                     | —            | —    | —            | —    | G13  | G13  | —            |
| PH1                           | AN1_B                               | —                                        | —                              | —                | 90                     | —            | —    | —            | —    | G14  | G14  | —            |
| PH2                           | AN2_B                               | —                                        | —                              | —                | 92                     | —            | —    | —            | —    | F16  | F16  | —            |
| PH3                           | AN3_B                               | —                                        | —                              | —                | 94                     | —            | —    | —            | —    | F15  | F15  | —            |
| PH4                           | AN4_B                               | —                                        | —                              | —                | 96                     | —            | —    | —            | —    | E16  | E16  | —            |
| PH5                           | AN5_B                               | —                                        | —                              | —                | 98                     | —            | —    | —            | —    | E15  | E15  | —            |
| PH6                           | AN6_B                               | —                                        | —                              | —                | 100                    | —            | —    | —            | —    | D16  | D16  | —            |
| PH7                           | AN7_B                               | —                                        | —                              | —                | 102                    | —            | —    | —            | —    | C16  | C16  | —            |
| PH8                           | AN8_B                               | —                                        | —                              | —                | 104                    | —            | —    | —            | —    | B16  | B16  | —            |
| PH9                           | AN9_B                               | —                                        | —                              | —                | 106                    | —            | —    | —            | —    | B14  | B14  | —            |
| PH10                          | AN10_B                              | —                                        | —                              | —                | 108                    | —            | —    | —            | —    | D13  | D13  | —            |
| PH11                          | AN11_B                              | —                                        | —                              | —                | 114                    | —            | —    | —            | —    | A13  | A13  | —            |
| PH12                          | AN12_B                              | —                                        | —                              | —                | 116                    | —            | —    | —            | —    | B12  | B12  | —            |
| PH13                          | AN13_B                              | —                                        | —                              | —                | 118                    | —            | —    | —            | —    | C11  | C11  | —            |
| PH14                          | AN14_B                              | —                                        | —                              | —                | 120                    | —            | —    | —            | —    | A11  | A11  | —            |
| PH15                          | AN15_B                              | —                                        | —                              | —                | 122                    | —            | —    | —            | —    | B10  | B10  | —            |
| PI0                           | PCS3_A                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | C3   | —            |
| PI1                           | PCS4_A                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | D5   | —            |
| PI2                           | PCS6_A                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | D4   | —            |
| PI3                           | PCS7_A                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | E4   | —            |
| PI4                           | PCS3_B                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | G4   | —            |
| PI5                           | PCS4_B                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | J4   | —            |
| PI6                           | PCS6_B                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | K4   | —            |
| PI7                           | PCS7_B                              | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | L4   | —            |
| PI8                           | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | N4   | —            |
| PI9                           | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | P3   | —            |
| PI10                          | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | R2   | —            |
| PI11                          | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | R15  | —            |
| PI12                          | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | N11  | —            |
| PI13                          | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | N12  | —            |
| PI14                          | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | N13  | —            |
| PI15                          | —                                   | —                                        | —                              | —                | —                      | —            | —    | —            | —    | —    | P14  | —            |

## NOTES:

1. The MAC7100 family maximum peripheral configurations are listed in these columns. Some family members do not implement the full complement of ATD, CAN, DSPI and eSCI peripherals. Refer to [Table 2 on page 3](#) for availability of peripheral functions on various devices.
2. AS function not available on mask set L49P devices.
3. MAC7111, MAC7116, MAC7131 and MAC7136 only.
4. The MCKO function cannot be used on MAC7121 devices (the alternate Nexus port must be used).
5. On MAC7121 mask set L49P devices, PB11 / PCS2\_B is bonded out on pin 57.
6. PD2 function not available on mask set L49P devices.
7. Optional debug status port not available on mask set L49P devices.
8. CAN C, CAN D and eSCI D not available on MAC7112, MAC7122 and MAC7142 devices.

Table 38. Power Supply, Voltage Regulator and Reference Pin Assignments


| Pin Name           | Pin Number (by Device)                                    |                    |                                                                                                                                                                                                                                               |             |
|--------------------|-----------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
|                    | 7101 / 7106 /<br>7111 / 7112 / 7116                       | 7121 / 7122 / 7126 | 7131 / 7136                                                                                                                                                                                                                                   | 7141 / 7142 |
| V <sub>DDX</sub>   | 14, 50, 64, 87, 124                                       | 10, 38, 66         | C9, H4, K16, P7, P10                                                                                                                                                                                                                          | 6, 35, 62   |
| V <sub>SSX</sub>   | 13, 49, 63, 86, 125<br><br>7101 / 7106 / 7112 only:<br>79 | 9, 37, 65          | A1, A2, B1, B2, F4, G7,<br>G8, G9, G10, H7, H8, H9,<br>H10, J7, J8, J9, J10, K7,<br>K8, K9, K10, M4, M13,<br>R9, R10, R16, T1, T2,<br>T15, T16<br><br>7131 only:<br>C3, D4, D5, E4, G4, J4,<br>K4, L4, N4, N11, N12,<br>N13, P3, P14, R9, R10 | 5, 34, 61   |
| V <sub>DDR</sub>   | 56                                                        | 44                 | P9                                                                                                                                                                                                                                            | 41          |
| V <sub>SSR</sub>   | 55                                                        | 43                 | N5, N6                                                                                                                                                                                                                                        | 40          |
| V <sub>DD2.5</sub> | 53, 127                                                   | 41, 101            | C8, P8                                                                                                                                                                                                                                        | 38, 92      |
| V <sub>SS2.5</sub> | 54, 126                                                   | 42, 100            | D6, D7, N7, N8                                                                                                                                                                                                                                | 39, 91      |
| V <sub>DDPLL</sub> | 57                                                        | 45                 | T8                                                                                                                                                                                                                                            | 42          |
| V <sub>SSPLL</sub> | 59                                                        | 47                 | N9, N10                                                                                                                                                                                                                                       | 44          |
| V <sub>DDA</sub>   | 109                                                       | 85                 | A16, B15, C13                                                                                                                                                                                                                                 | 76          |
| V <sub>SSA</sub>   | 112                                                       | 88                 | D11, D12                                                                                                                                                                                                                                      | 79          |
| V <sub>RH</sub>    | 110                                                       | 86                 | A15                                                                                                                                                                                                                                           | 77          |
| V <sub>RL</sub>    | 111                                                       | 87                 | A14                                                                                                                                                                                                                                           | 78          |
| TEST <sup>1</sup>  | 62                                                        | 50                 | R11                                                                                                                                                                                                                                           | 47          |
| N/C                | —                                                         | —                  | —                                                                                                                                                                                                                                             | 7           |

## NOTES:

1. This pin is reserved for Freescale factory testing, and must be tied to system ground in all applications.



## 4.1 MAC7141 Pin Diagram

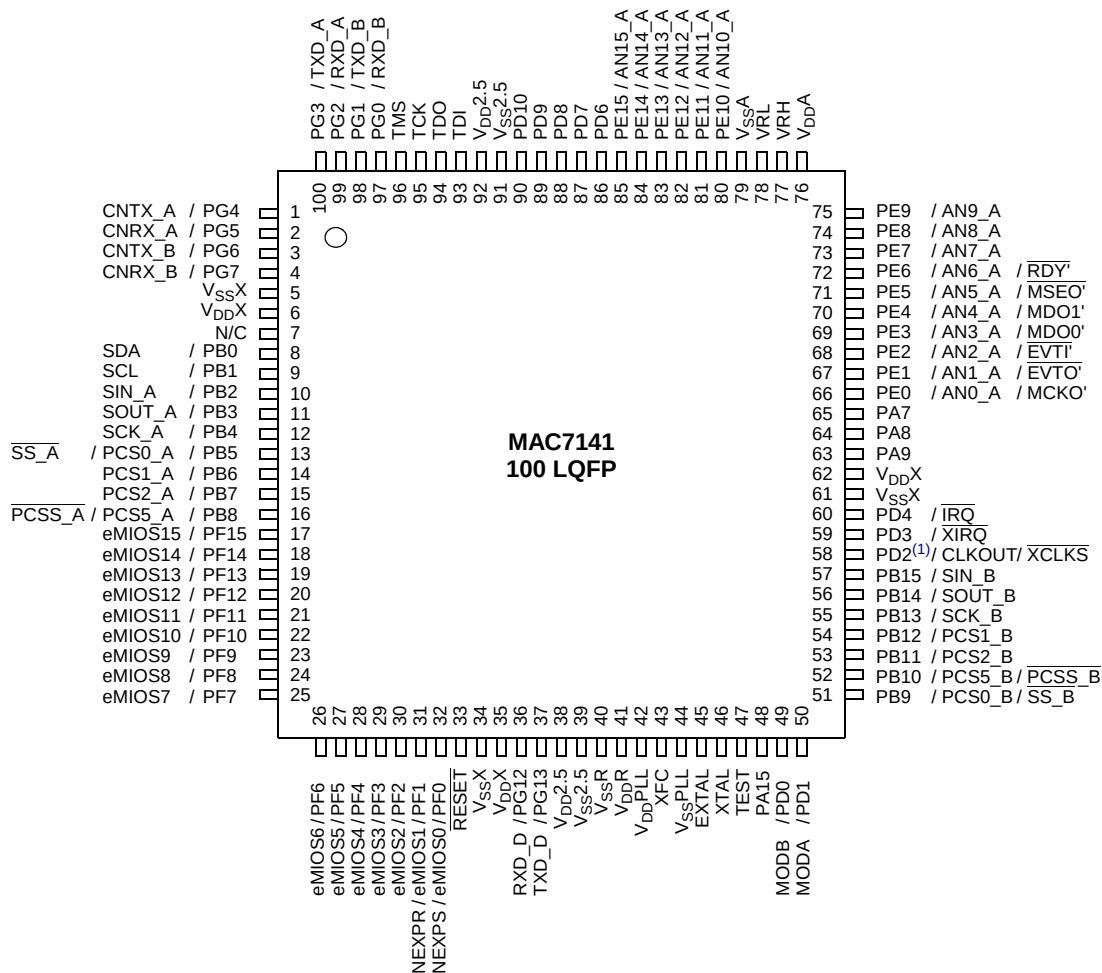

1. PD2 function not available on L49P mask set devices.

**Figure 15. Pin Assignments for MAC7141 in 100-pin LQFP**

## 4.2 MAC7142 Pin Diagram


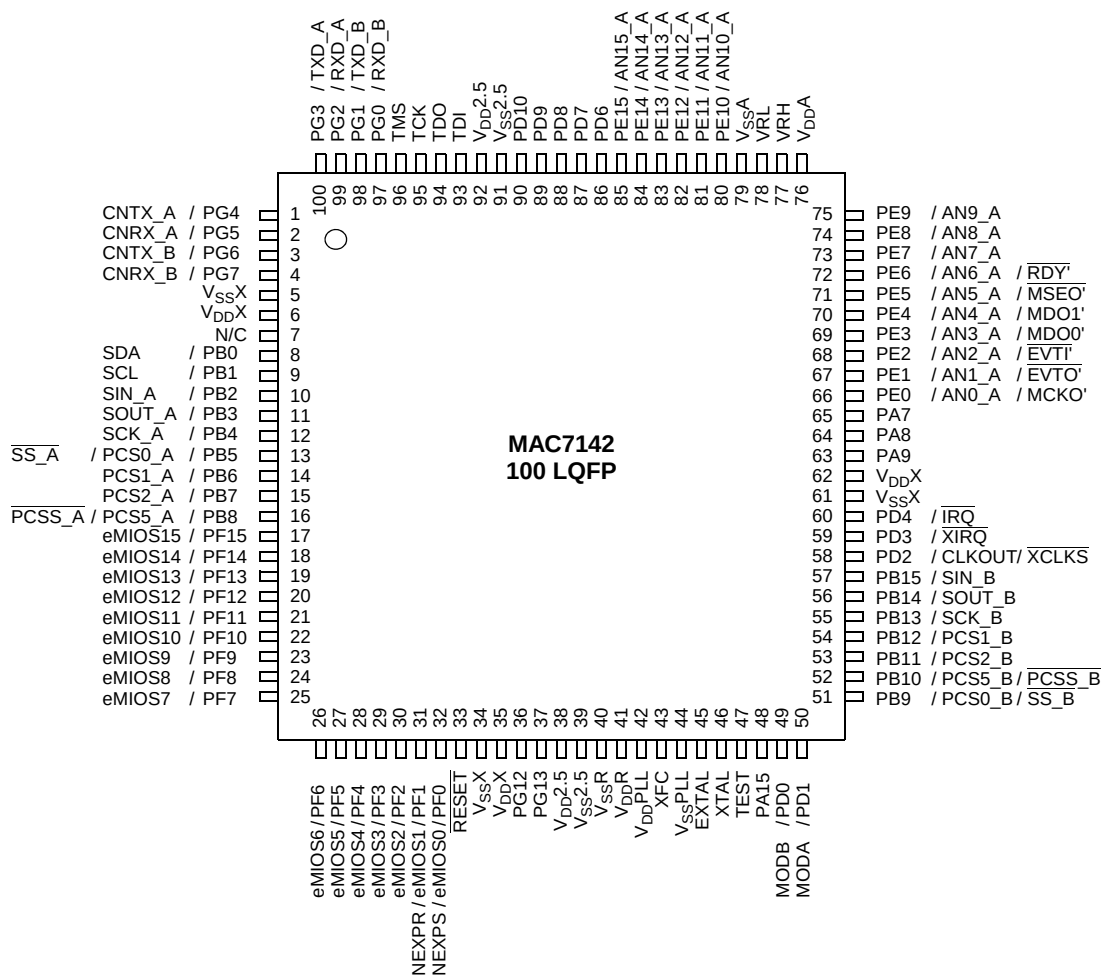


Figure 16. Pin Assignments for MAC7142 in 100-pin LQFP

## 4.3 MAC7121 / MAC7126 Pin Diagram

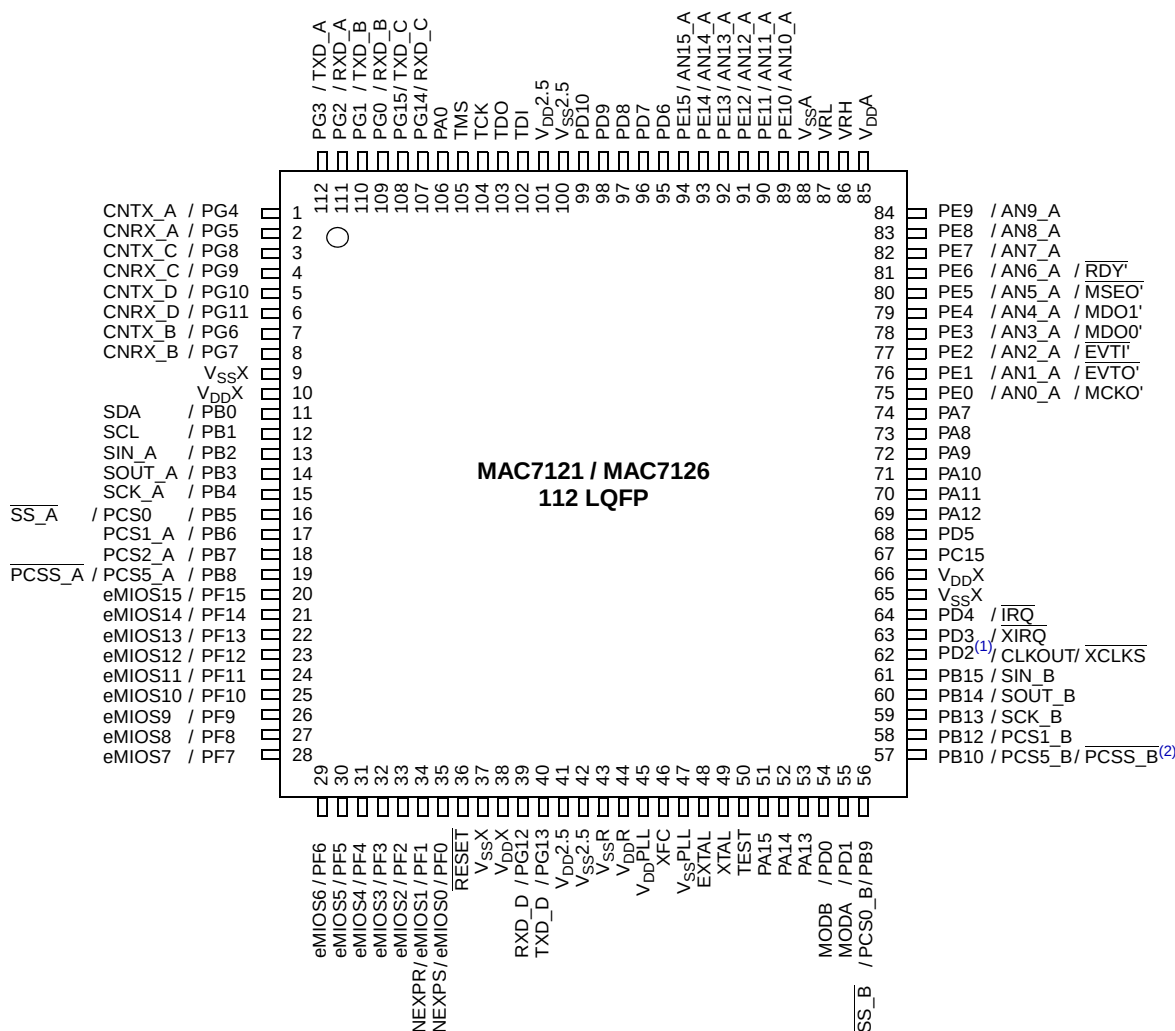

1. PD2 function not available on L49P mask set devices.

2. On L49P mask set devices, PB11 / PCS2\_B is bonded out on pin 57.

**Figure 17. Pin Assignments for MAC7121 / MAC7126 in 112-pin LQFP**

## 4.4 MAC7122 Pin Diagram


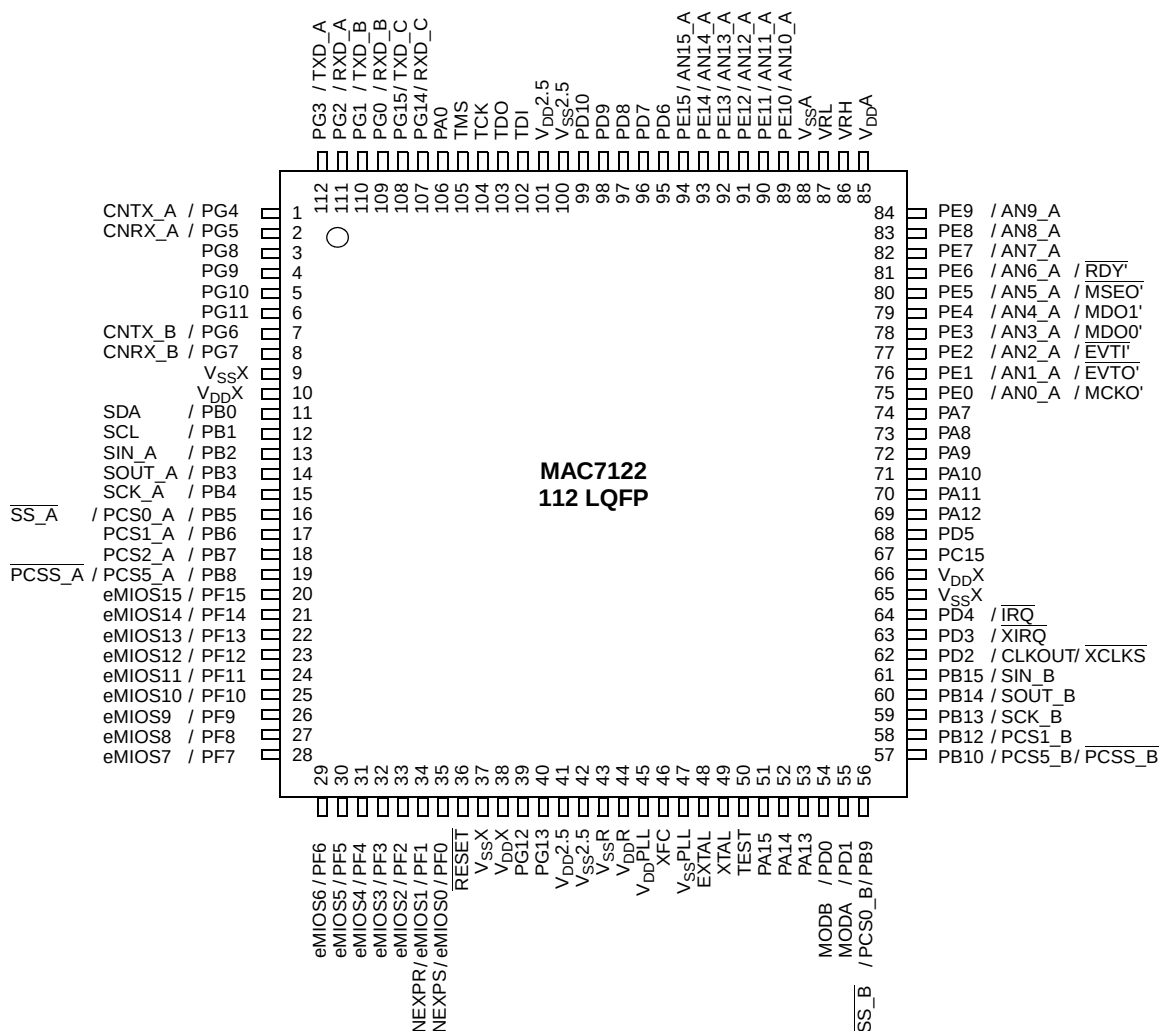


Figure 18. Pin Assignments for MAC7122 in 112-pin LQFP


## 4.5 MAC7101 / MAC7106 Pin Diagram

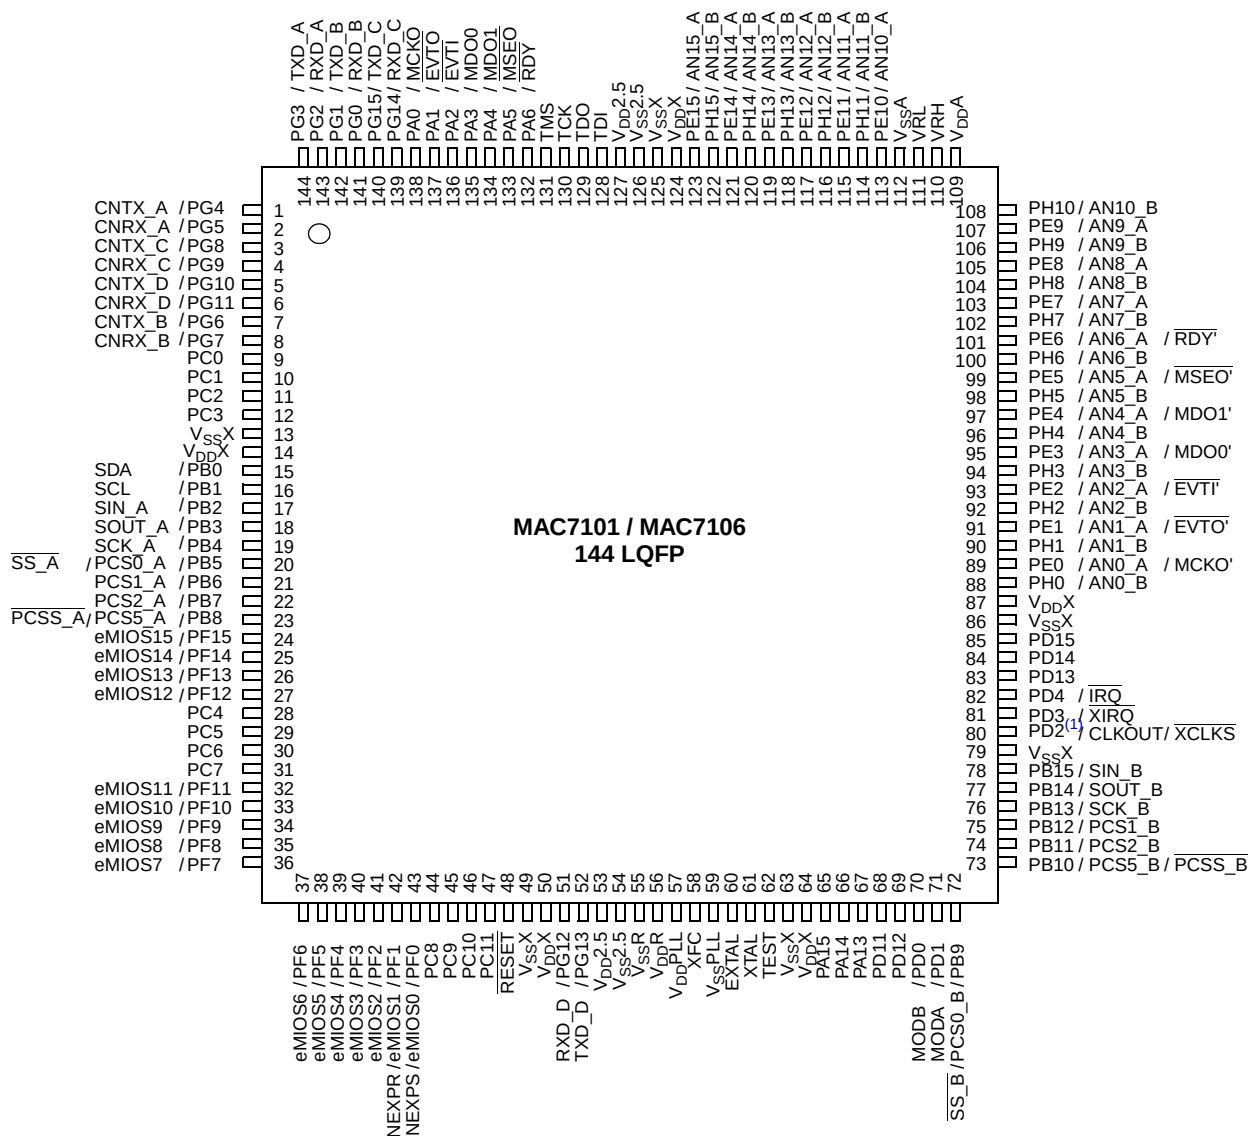

1. PD2 function not available on L49P mask set devices.

**Figure 19. Pin Assignments for MAC7101 / MAC7106 in 144-pin LQFP**

## 4.6 MAC7111 / MAC7116 Pin Diagram

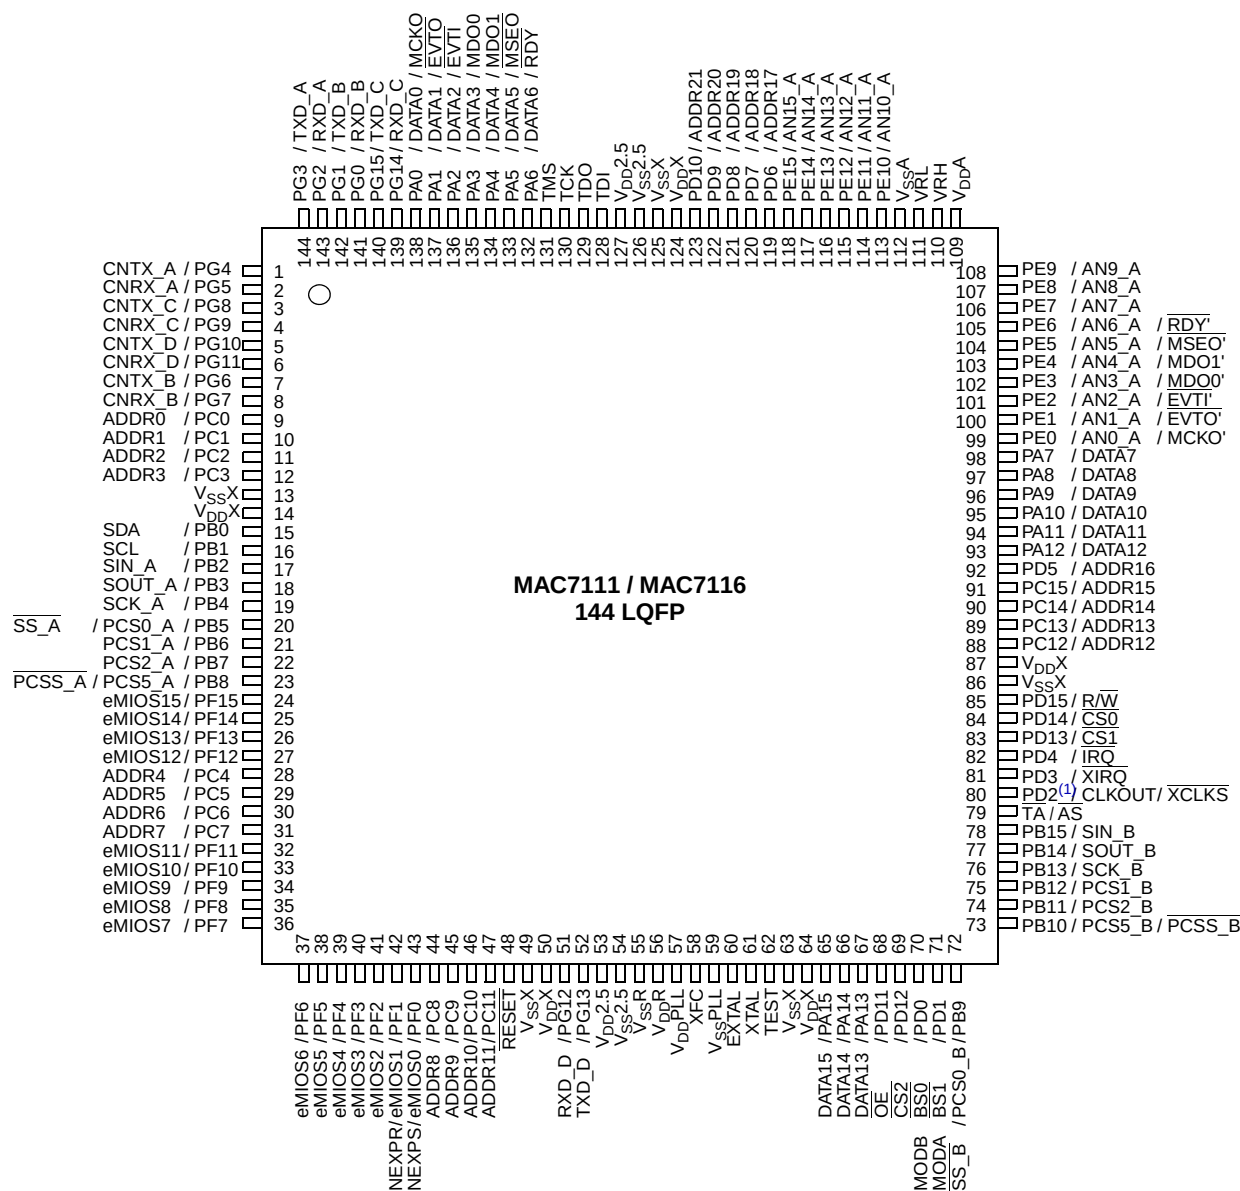

1. PD2 function not available on L49P mask set devices.

**Figure 20. Pin Assignments for MAC7111 / MAC7116 in 144-pin LQFP**

## 4.7 MAC7112 Pin Diagram

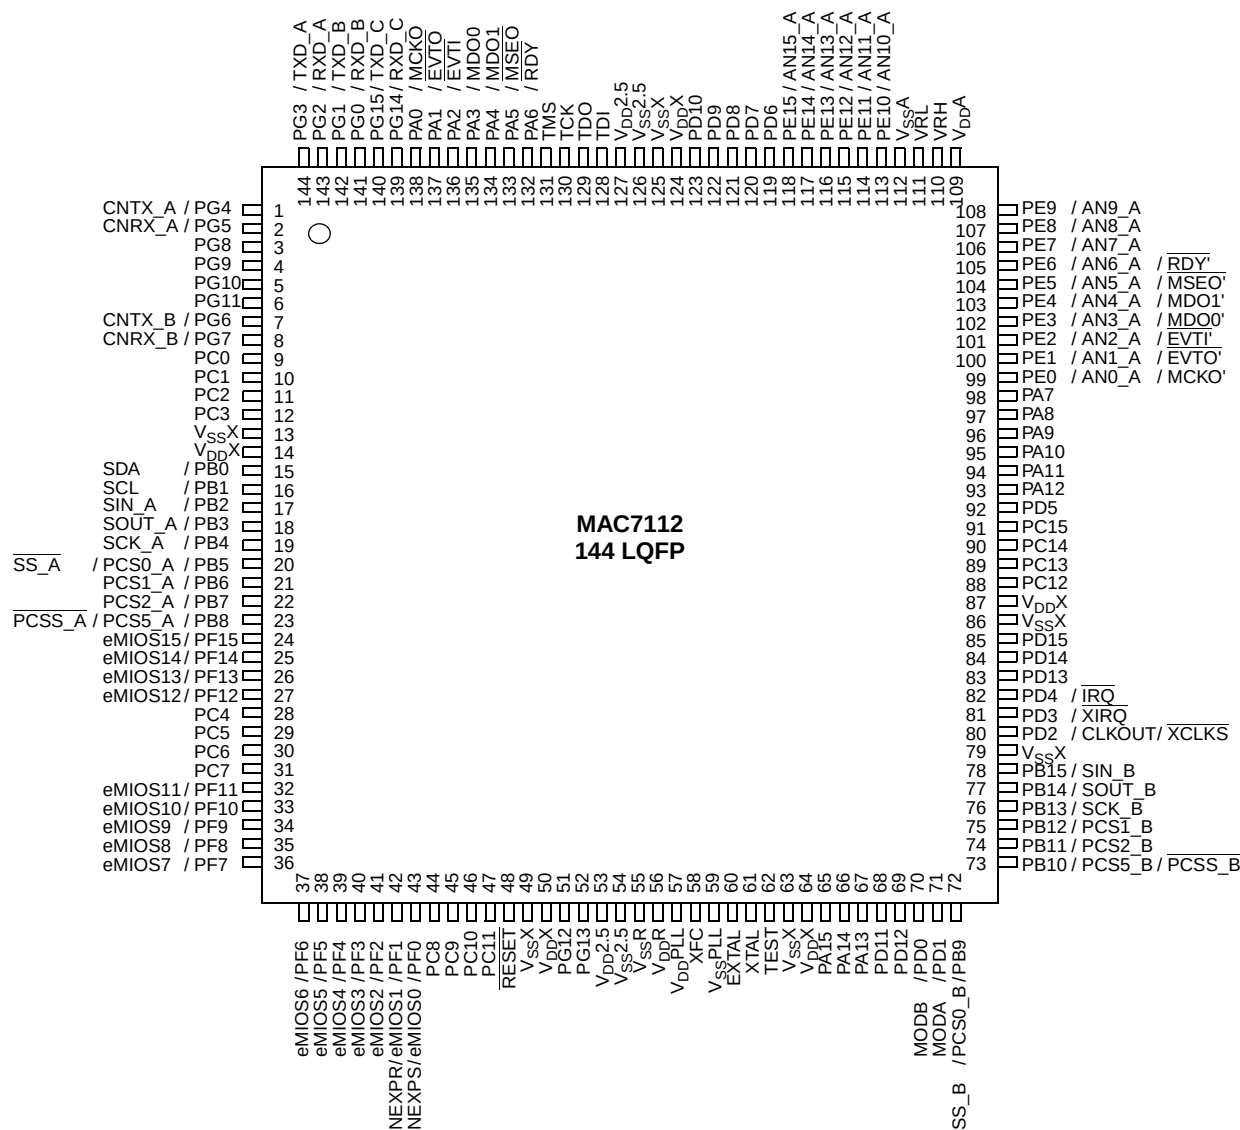


Figure 21. Pin Assignments for MAC7112 in 144-pin LQFP

## 4.8 MAC7131 Pin Diagram

|   | 1                 | 2                 | 3                 | 4                 | 5                 | 6                   | 7                         | 8                   | 9                   | 10                  | 11                | 12                | 13                | 14                                       | 15                | 16                 |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|---------------------|---------------------------|---------------------|---------------------|---------------------|-------------------|-------------------|-------------------|------------------------------------------|-------------------|--------------------|
| A | V <sub>SS</sub> X | V <sub>SS</sub> X | PG0               | PG14              | PA2               | PA5                 | TCK                       | TDI                 | PE15                | PE14                | PH14              | PE12              | PH11              | V <sub>RL</sub>                          | V <sub>RH</sub>   | V <sub>DD</sub> A  |
| B | V <sub>SS</sub> X | V <sub>SS</sub> X | PG2               | PG15              | PA0               | PA4                 | TMS                       | TDO                 | PD9                 | PH15                | PE13              | PH12              | PE10              | PH9                                      | V <sub>DD</sub> A | PH8                |
| C | PG5               | PG3               | V <sub>SS</sub> X | PG1               | PA1               | PA3                 | PA6                       | V <sub>DD</sub> 2.5 | V <sub>DD</sub> X   | PD6                 | PH13              | PE11              | V <sub>DD</sub> A | PE8                                      | PE7               | PH7                |
| D | PG9               | PG8               | PG4               | V <sub>SS</sub> X | V <sub>SS</sub> X | V <sub>SS</sub> 2.5 | V <sub>SS</sub> 2.5       | PD10                | PD8                 | PD7                 | V <sub>SS</sub> A | V <sub>SS</sub> A | PH10              | PE9                                      | PE6               | PH6                |
| E | PG6               | PG11              | PG10              | V <sub>SS</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | PE4               | PE5                                      | PH5               | PH4                |
| F | PC0               | PG7               | PC1               | V <sub>SS</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | PE2               | PE3                                      | PH3               | PH2                |
| G | PB0               | PC2               | PC3               | V <sub>SS</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | PH0               | PH1                                      | PE1               | PE0                |
| H | PB3               | PB2               | PB1               | V <sub>DD</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | PA8               | PA9                                      | PA7               | PA10               |
| J | PB5               | PB6               | PB4               | V <sub>SS</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | PD5               | PA12                                     | PA11              | PC15               |
| K | PB7               | PB8               | PF15              | V <sub>SS</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | PC13              | PC12                                     | PC14              | V <sub>DD</sub> X  |
| L | PF14              | PF13              | PC4               | V <sub>SS</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | PD13              | PD14                                     | PD15              | PD4                |
| M | PF12              | PC5               | PC6               | V <sub>SS</sub> X |                   |                     |                           |                     |                     |                     |                   |                   | V <sub>SS</sub> X | $\overline{\text{TA/AS}}$ <sup>(1)</sup> | PD3               | PD2 <sup>(1)</sup> |
| N | PF11              | PF10              | PC7               | V <sub>SS</sub> X | V <sub>SS</sub> R | V <sub>SS</sub> R   | V <sub>SS</sub> 2.5       | V <sub>SS</sub> 2.5 | V <sub>SS</sub> PLL | V <sub>SS</sub> PLL | V <sub>SS</sub> X | V <sub>SS</sub> X | V <sub>SS</sub> X | PB11                                     | PB14              | PB15               |
| P | PF9               | PF8               | V <sub>SS</sub> X | PF5               | PC8               | PC10                | V <sub>DD</sub> X         | V <sub>DD</sub> 2.5 | V <sub>DD</sub> R   | V <sub>DD</sub> X   | PA15              | PD11              | PD12              | V <sub>SS</sub> X                        | PB12              | PB13               |
| R | PF7               | V <sub>SS</sub> X | PF6               | PF3               | PF1               | PC9                 | PG12                      | PG13                | V <sub>SS</sub> X   | V <sub>SS</sub> X   | TEST              | PA13              | PD1               | PB10                                     | V <sub>SS</sub> X | V <sub>SS</sub> X  |
| T | V <sub>SS</sub> X | V <sub>SS</sub> X | PF4               | PF2               | PF0               | PC11                | $\overline{\text{RESET}}$ | V <sub>DD</sub> PLL | XFC                 | EXTAL               | XTAL              | PA14              | PD0               | PB9                                      | V <sub>SS</sub> X | V <sub>SS</sub> X  |

1.  $\overline{\text{AS}}$  and PD2 functions not available on L49P mask set devices.

**Figure 22. Pin Assignments for MAC7131 in 208-pin MAP BGA**



## 4.9 MAC7136 Pin Diagram

|   | 1                 | 2                 | 3    | 4                 | 5                 | 6                   | 7                   | 8                   | 9                   | 10                  | 11                | 12                | 13                | 14                              | 15                | 16                |
|---|-------------------|-------------------|------|-------------------|-------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-------------------|-------------------|-------------------|---------------------------------|-------------------|-------------------|
| A | V <sub>SS</sub> X | V <sub>SS</sub> X | PG0  | PG14              | PA2               | PA5                 | TCK                 | TDI                 | PE15                | PE14                | PH14              | PE12              | PH11              | V <sub>RL</sub>                 | V <sub>RH</sub>   | V <sub>DD</sub> A |
| B | V <sub>SS</sub> X | V <sub>SS</sub> X | PG2  | PG15              | PA0               | PA4                 | TMS                 | TDO                 | PD9                 | PH15                | PE13              | PH12              | PE10              | PH9                             | V <sub>DD</sub> A | PH8               |
| C | PG5               | PG3               | PI0  | PG1               | PA1               | PA3                 | PA6                 | V <sub>DD</sub> 2.5 | V <sub>DD</sub> X   | PD6                 | PH13              | PE11              | V <sub>DD</sub> A | PE8                             | PE7               | PH7               |
| D | PG9               | PG8               | PG4  | PI2               | PI1               | V <sub>SS</sub> 2.5 | V <sub>SS</sub> 2.5 | PD10                | PD8                 | PD7                 | V <sub>SS</sub> A | V <sub>SS</sub> A | PH10              | PE9                             | PE6               | PH6               |
| E | PG6               | PG11              | PG10 | PI3               |                   |                     |                     |                     |                     |                     |                   |                   | PE4               | PE5                             | PH5               | PH4               |
| F | PC0               | PG7               | PC1  | V <sub>SS</sub> X |                   |                     |                     |                     |                     |                     |                   |                   | PE2               | PE3                             | PH3               | PH2               |
| G | PB0               | PC2               | PC3  | PI4               |                   |                     |                     |                     |                     |                     |                   |                   | PH0               | PH1                             | PE1               | PE0               |
| H | PB3               | PB2               | PB1  | V <sub>DD</sub> X |                   |                     |                     |                     |                     |                     |                   |                   | PA8               | PA9                             | PA7               | PA10              |
| J | PB5               | PB6               | PB4  | PI5               |                   |                     |                     |                     |                     |                     |                   |                   | PD5               | PA12                            | PA11              | PC15              |
| K | PB7               | PB8               | PF15 | PI6               |                   |                     |                     |                     |                     |                     |                   |                   | PC13              | PC12                            | PC14              | V <sub>DD</sub> X |
| L | PF14              | PF13              | PC4  | PI7               |                   |                     |                     |                     |                     |                     |                   |                   | PD13              | PD14                            | PD15              | PD4               |
| M | PF12              | PC5               | PC6  | V <sub>SS</sub> X |                   |                     |                     |                     |                     |                     |                   |                   | V <sub>SS</sub> X | $\overline{TA} / \overline{AS}$ | PD3               | PD2               |
| N | PF11              | PF10              | PC7  | PI8               | V <sub>SS</sub> R | V <sub>SS</sub> R   | V <sub>SS</sub> 2.5 | V <sub>SS</sub> 2.5 | V <sub>SS</sub> PLL | V <sub>SS</sub> PLL | PI12              | PI13              | PI14              | PB11                            | PB14              | PB15              |
| P | PF9               | PF8               | PI9  | PF5               | PC8               | PC10                | V <sub>DD</sub> X   | V <sub>DD</sub> 2.5 | V <sub>DD</sub> R   | V <sub>DD</sub> X   | PA15              | PD11              | PD12              | PI15                            | PB12              | PB13              |
| R | PF7               | PI10              | PF6  | PF3               | PF1               | PC9                 | PG12                | PG13                | V <sub>SS</sub> X   | V <sub>SS</sub> X   | TEST              | PA13              | PD1               | PB10                            | PI11              | V <sub>SS</sub> X |
| T | V <sub>SS</sub> X | V <sub>SS</sub> X | PF4  | PF2               | PF0               | PC11                | $\overline{RESET}$  | V <sub>DD</sub> PLL | XFC                 | EXTAL               | XTAL              | PA14              | PD0               | PB9                             | V <sub>SS</sub> X | V <sub>SS</sub> X |

Figure 23. Pin Assignments for MAC7136 in 208-pin MAP BGA

# 5 Mechanical Information

As indicated in [Table 2](#), MAC7100 Family devices are available in several packages. Please refer to the [freescale.com](http://freescale.com) web site for the most up-to-date package availability and mechanical information. The table below lists available package identifiers and Freescale document numbers for reference.

**Table 39. Package Identifiers and Mechanical Specifications**

| Package Type     | Case Identifier | Mechanical Specification Document |
|------------------|-----------------|-----------------------------------|
| 100-lead LQFP    | 983-02          | <a href="#">98ASS23308W</a>       |
| 112-lead LQFP    | 987-02          | <a href="#">98ASS23330W</a>       |
| 144-lead LQFP    | 918-03          | <a href="#">98ASS23177W</a>       |
| 208-lead MAP BGA | 1159A-01        | <a href="#">98ARS23882W</a>       |

# Revision History

| Version No.<br>Release Date                                  | Description of Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Page<br>Numbers     |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
|--------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|----------|---------------------------|-------------|-------------|---------------------------|-------------|-------------|--------------------------------------------------------------|----------------------|---------------------|----------------------------------------------------------|-------------|--------------|----------------------------------------------------------|-------------|-----|---------------------------|-------------|-------------|------------------------------------|----------|----------|----------------------------|--------------|--------------|---------------------|-------------|-------------|---------------------------|----------|----------|-----------------------------------------|----------|----------|-----------------------------|-------------|-------------|------------------------------------------|-------------|-------------|-------------------------------------------|--------------|--------------|----------------------------------------------|-------------|-------------|----------------------------------------------|-------------|-------------|--------------------------------|-------------|-------------|-------------------------------------------|-------------|-------------|-------------------------------------------|-------------|-------------|--------------------------------------------|-----|-------------|--------------------------------|-----|-------------|---------------------------|-----|-------------|--------------------------------------------|-------------|-------------|----------------------------------------|--------------|--------------|---------------------------------------|--------------|--------------|---------------------------------------|-------------|-------------|----------------------------|-------------|-------------|---------------------------------|--------------|--------------|------|
| v0.1<br>29-Oct-03                                            | First public customer release (preliminary).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                     |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| v1.0<br>14-Sep-04                                            | <p><b>General</b></p> <ul style="list-style-type: none"> <li>Converted to Freescale identity, with blue cross-reference highlights for enhanced PDF navigation, and miscellaneous updates for presentation consistency.</li> <li>The order of <a href="#">Section 3.5</a> and <a href="#">Section 3.6</a> were reversed for better content flow. This has caused specification numbering to change as detailed below.</li> </ul> <p><b>Note:</b> Content consolidation and reorganization has resulted in the following table and specification number changes (the first spec number of each table is shown):</p> <table> <tr> <th>Table Title</th><th>Rev. 1.0</th><th>Rev. 0.1</th></tr> <tr> <td>5.0 V I/O Characteristics</td><td>Table 8 D1a</td><td>Table 15 F1</td></tr> <tr> <td>3.3 V I/O Characteristics</td><td>Table 9 E1a</td><td>Table 16 G1</td></tr> <tr> <td>Section 3.6, "Power Dissipation and Thermal Characteristics"</td><td>Table 10 to Table 14</td><td>Table 7 to Table 11</td></tr> <tr> <td>MAC71x1/6 Device Supply Current Characteristics – 40 MHz</td><td>Table 15 F1</td><td>Table 12 D1a</td></tr> <tr> <td>MAC71x1/6 Device Supply Current Characteristics – 50 MHz</td><td>Table 16 G1</td><td>N/A</td></tr> <tr> <td>VREG Operating Conditions</td><td>Table 17 H1</td><td>Table 13 E1</td></tr> <tr> <td>VREG Recommended Load Capacitances</td><td>Table 18</td><td>Table 14</td></tr> <tr> <td>Oscillator Characteristics</td><td>Table 19 J1a</td><td>Table 17 H1a</td></tr> <tr> <td>PLL Characteristics</td><td>Table 20 K1</td><td>Table 18 J1</td></tr> <tr> <td>Crystal Monitor Time-Outs</td><td>Table 21</td><td>Table 19</td></tr> <tr> <td>CRG Maximum Clock Quality Check Timings</td><td>Table 22</td><td>Table 20</td></tr> <tr> <td>CRG Startup Characteristics</td><td>Table 23 L1</td><td>Table 21 K1</td></tr> <tr> <td>External Bus Input Timing Specifications</td><td>Table 24 M1</td><td>Table 22 L1</td></tr> <tr> <td>External Bus Output Timing Specifications</td><td>Table 25 M6a</td><td>Table 23 L6a</td></tr> <tr> <td>ATD Operating Characteristics in 5.0 V Range</td><td>Table 26 N1</td><td>Table 24 M1</td></tr> <tr> <td>ATD Operating Characteristics in 3.3 V Range</td><td>Table 27 P1</td><td>Table 25 N1</td></tr> <tr> <td>ATD Electrical Characteristics</td><td>Table 28 Q1</td><td>Table 26 P1</td></tr> <tr> <td>ATD Conversion Performance in 5.0 V Range</td><td>Table 29 R1</td><td>Table 27 Q1</td></tr> <tr> <td>ATD Conversion Performance in 3.3 V Range</td><td>Table 30 S1</td><td>Table 28 R1</td></tr> <tr> <td>ATD Electrical Characteristics (Operating)</td><td>N/A</td><td>Table 29 S1</td></tr> <tr> <td>ATD Performance Specifications</td><td>N/A</td><td>Table 30 T1</td></tr> <tr> <td>ATD Timing Specifications</td><td>N/A</td><td>Table 31 U1</td></tr> <tr> <td>ATD External Trigger Timing Specifications</td><td>Table 31 T1</td><td>Table 32 V1</td></tr> <tr> <td>SPI Master Mode Timing Characteristics</td><td>Table 32 U1a</td><td>Table 33 W1a</td></tr> <tr> <td>SPI Slave Mode Timing Characteristics</td><td>Table 33 V1a</td><td>Table 34 X1a</td></tr> <tr> <td>FlexCAN Wake-up Pulse Characteristics</td><td>Table 34 W1</td><td>Table 35 Y1</td></tr> <tr> <td>CFM Timing Characteristics</td><td>Table 35 X1</td><td>Table 36 Z1</td></tr> <tr> <td>NVM Reliability Characteristics</td><td>Table 36 X9b</td><td>Table 37 Z10</td></tr> </table> | Table Title         | Rev. 1.0 | Rev. 0.1 | 5.0 V I/O Characteristics | Table 8 D1a | Table 15 F1 | 3.3 V I/O Characteristics | Table 9 E1a | Table 16 G1 | Section 3.6, "Power Dissipation and Thermal Characteristics" | Table 10 to Table 14 | Table 7 to Table 11 | MAC71x1/6 Device Supply Current Characteristics – 40 MHz | Table 15 F1 | Table 12 D1a | MAC71x1/6 Device Supply Current Characteristics – 50 MHz | Table 16 G1 | N/A | VREG Operating Conditions | Table 17 H1 | Table 13 E1 | VREG Recommended Load Capacitances | Table 18 | Table 14 | Oscillator Characteristics | Table 19 J1a | Table 17 H1a | PLL Characteristics | Table 20 K1 | Table 18 J1 | Crystal Monitor Time-Outs | Table 21 | Table 19 | CRG Maximum Clock Quality Check Timings | Table 22 | Table 20 | CRG Startup Characteristics | Table 23 L1 | Table 21 K1 | External Bus Input Timing Specifications | Table 24 M1 | Table 22 L1 | External Bus Output Timing Specifications | Table 25 M6a | Table 23 L6a | ATD Operating Characteristics in 5.0 V Range | Table 26 N1 | Table 24 M1 | ATD Operating Characteristics in 3.3 V Range | Table 27 P1 | Table 25 N1 | ATD Electrical Characteristics | Table 28 Q1 | Table 26 P1 | ATD Conversion Performance in 5.0 V Range | Table 29 R1 | Table 27 Q1 | ATD Conversion Performance in 3.3 V Range | Table 30 S1 | Table 28 R1 | ATD Electrical Characteristics (Operating) | N/A | Table 29 S1 | ATD Performance Specifications | N/A | Table 30 T1 | ATD Timing Specifications | N/A | Table 31 U1 | ATD External Trigger Timing Specifications | Table 31 T1 | Table 32 V1 | SPI Master Mode Timing Characteristics | Table 32 U1a | Table 33 W1a | SPI Slave Mode Timing Characteristics | Table 33 V1a | Table 34 X1a | FlexCAN Wake-up Pulse Characteristics | Table 34 W1 | Table 35 Y1 | CFM Timing Characteristics | Table 35 X1 | Table 36 Z1 | NVM Reliability Characteristics | Table 36 X9b | Table 37 Z10 | 7, 8 |
| Table Title                                                  | Rev. 1.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Rev. 0.1            |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| 5.0 V I/O Characteristics                                    | Table 8 D1a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 15 F1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| 3.3 V I/O Characteristics                                    | Table 9 E1a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 16 G1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| Section 3.6, "Power Dissipation and Thermal Characteristics" | Table 10 to Table 14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Table 7 to Table 11 |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| MAC71x1/6 Device Supply Current Characteristics – 40 MHz     | Table 15 F1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 12 D1a        |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| MAC71x1/6 Device Supply Current Characteristics – 50 MHz     | Table 16 G1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | N/A                 |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| VREG Operating Conditions                                    | Table 17 H1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 13 E1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| VREG Recommended Load Capacitances                           | Table 18                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Table 14            |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| Oscillator Characteristics                                   | Table 19 J1a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Table 17 H1a        |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| PLL Characteristics                                          | Table 20 K1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 18 J1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| Crystal Monitor Time-Outs                                    | Table 21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Table 19            |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| CRG Maximum Clock Quality Check Timings                      | Table 22                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Table 20            |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| CRG Startup Characteristics                                  | Table 23 L1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 21 K1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| External Bus Input Timing Specifications                     | Table 24 M1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 22 L1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| External Bus Output Timing Specifications                    | Table 25 M6a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Table 23 L6a        |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Operating Characteristics in 5.0 V Range                 | Table 26 N1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 24 M1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Operating Characteristics in 3.3 V Range                 | Table 27 P1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 25 N1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Electrical Characteristics                               | Table 28 Q1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 26 P1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Conversion Performance in 5.0 V Range                    | Table 29 R1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 27 Q1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Conversion Performance in 3.3 V Range                    | Table 30 S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 28 R1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Electrical Characteristics (Operating)                   | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Table 29 S1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Performance Specifications                               | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Table 30 T1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD Timing Specifications                                    | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Table 31 U1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| ATD External Trigger Timing Specifications                   | Table 31 T1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 32 V1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| SPI Master Mode Timing Characteristics                       | Table 32 U1a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Table 33 W1a        |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| SPI Slave Mode Timing Characteristics                        | Table 33 V1a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Table 34 X1a        |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| FlexCAN Wake-up Pulse Characteristics                        | Table 34 W1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 35 Y1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| CFM Timing Characteristics                                   | Table 35 X1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Table 36 Z1         |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
| NVM Reliability Characteristics                              | Table 36 X9b                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Table 37 Z10        |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |
|                                                              | <p><b>Section 2, "Ordering Information"</b></p> <ul style="list-style-type: none"> <li>Added <a href="#">Table 1</a>, mask set information</li> <li>Updated <a href="#">Table 2</a> with expanded port pin counts, MAC71x2 and MAC71x6 family members</li> <li>Pin assignment changes for mask set L47W devices: <ul style="list-style-type: none"> <li>In <a href="#">Table 37</a>, PB10 / PCS5_B / PCSS_B changed to pin 57, footnote for L49P</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2<br>3<br>36        |          |          |                           |             |             |                           |             |             |                                                              |                      |                     |                                                          |             |              |                                                          |             |     |                           |             |             |                                    |          |          |                            |              |              |                     |             |             |                           |          |          |                                         |          |          |                             |             |             |                                          |             |             |                                           |              |              |                                              |             |             |                                              |             |             |                                |             |             |                                           |             |             |                                           |             |             |                                            |     |             |                                |     |             |                           |     |             |                                            |             |             |                                        |              |              |                                       |              |              |                                       |             |             |                            |             |             |                                 |              |              |      |

## Revision History (continued)

| Version No.<br>Release Date      | Description of Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Page<br>Numbers |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| v1.0<br>14-Sep-04<br>(continued) | <b>Section 3, “Electrical Characteristics”</b> <ul style="list-style-type: none"><li>• <b>Section 3.2, “Absolute Maximum Ratings”</b><ul style="list-style-type: none"><li>— <b>A1a</b> renamed to <math>V_{DDX}</math>4</li><li>— <b>A4</b> “rating” changed to Analog (from ATD)4</li><li>— <b>A9</b> minimum changed to <math>-0.3</math>5</li><li>— <b>A12</b> maximum value removed, footnote reference added5</li><li>— <b>Table 8, Table 9</b> footnotes added regarding <math>V_{DD5}/V_{SS5}</math>7, 8</li></ul></li><li>• <b>Section 3.4, “Operating Conditions”</b><ul style="list-style-type: none"><li>— <b>C1</b> renamed to <math>V_{DDX}</math>6</li><li>— <b>C4</b> added (<b>C5</b> to <b>C11b</b> renumbered)6</li><li>— <b>C8</b> maximum changed from 40 MHz to 50 MHz6</li></ul></li><li>• <b>Section 3.5, “Input/Output Characteristics”</b><ul style="list-style-type: none"><li>— <b>Table 8</b> spec <b>D4</b> updated (from TBD)7</li><li>— <b>Table 9</b> spec <b>E4</b> changed to 1 <math>\mu</math>A to match <b>D4</b>8</li></ul></li><li>• <b>Section 3.6, “Power Dissipation and Thermal Characteristics”</b><ul style="list-style-type: none"><li>— Reworked <b>Equation 1</b> through <b>Equation 4</b> and supporting text9</li><li>— <b>Section 3.6.1</b> and <b>Table 10</b> name changed from “Power Dissipation...”10</li></ul></li><li>• <b>Section 3.7, “Power Supply”</b><ul style="list-style-type: none"><li>— Added <b>MAC71x1</b> designation and footnotes to <b>Table 15 / Table 16</b>12</li><li>— <b>Table 15</b> designated for 40 MHz, and<ul style="list-style-type: none"><li>– Numerous TBD entries replaced with values</li><li>– Run Supply Current collapsed from fifteen spec items to one</li><li>– Removed separate Core/Regulator/Pins specs for Run/Pseudo Stop/Stop modes</li><li>– <b>F1</b> and <b>F3</b> descriptions changed</li><li>– <b>F1, F2, F3</b> and <b>F4</b> values updated</li></ul></li><li>— <b>Table 16</b> added for 50 MHz specifications12</li><li>— <b>Table 17</b>, deleted <math>I_{REG}</math> spec (Regulator Current in Reduced Power, Shutdown Modes)13</li><li>— <b>Table 18</b>, <math>V_{DD2.5}</math> load capacitance typical changed, with clarification footnote14</li></ul></li><li>• <b>Section 3.8, “Clock and Reset Generator”</b><ul style="list-style-type: none"><li>— <b>Table 19</b> updates15<ul style="list-style-type: none"><li>– Changed specs <b>J1b</b> and <b>J6</b> maximum from 40 MHz to 50 MHz</li><li>– Reversed polarity of <math>\overline{XCLKS}</math> reference in footnote (3)</li><li>– <b>J1b</b> maximum changed to 40 MHz</li><li>– <math>V_{DCBIAS}</math> removed</li><li>– Added footnote to define <math>t_{fSYS}</math> as <math>1 \div f_{SYS}</math> for use elsewhere in the document</li></ul></li><li>— Updated <b>Section 3.8.2, “PLL Filter Characteristics”</b>16</li><li>— <b>Table 20</b> updates18<ul style="list-style-type: none"><li>– Changed spec <b>K3</b> maximum from 40 MHz to 50 MHz</li><li>– Added footnote to define <math>t_{fSYS}</math> as <math>1 \div f_{SYS}</math> for use elsewhere in the document</li></ul></li><li>— <b>Table 23</b> updates19<ul style="list-style-type: none"><li>– Removed <math>V_{PORR}</math> and <math>V_{PORA}</math>, as they duplicated <b>H6</b></li><li>– Removed <math>t_{WRS}</math></li></ul></li></ul></li><li>• <b>Section 3.9, “External Bus Timing”</b><ul style="list-style-type: none"><li>— <b>Table 24</b> updates20<ul style="list-style-type: none"><li>– <b>M1</b> minimum changed from 25 ns to 20 ns (<b>Figure 6</b> also updated)</li><li>– Reworded footnote (1)</li><li>– Added footnote (2) to define <math>t_{CYC}</math> as <math>1 \div CLKOUT</math></li></ul></li><li>— <b>Table 25</b> updates21<ul style="list-style-type: none"><li>– Added footnote (1)</li><li>– Consolidated previous NOTES into footnote (2), (<b>Figure 7, Figure 8</b> also updated)</li></ul></li></ul></li></ul> |                 |

# Revision History (continued)

| Version No.<br>Release Date      | Description of Changes                                                                                                                                                                                                                       | Page<br>Numbers |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| v1.0<br>14-Sep-04<br>(continued) | <b>Section 3, “Electrical Characteristics” (continued)</b>                                                                                                                                                                                   |                 |
|                                  | • <b>Section 3.10, “Analog-to-Digital Converter”</b>                                                                                                                                                                                         | 24              |
|                                  | — Rev. 0.1 redundant and superfluous content deleted                                                                                                                                                                                         |                 |
|                                  | — Section 3.10.3, “ATD Electrical Specifications,” (included Table 29 and Table 30)                                                                                                                                                          |                 |
|                                  | — Table 31, “ATD Performance Specifications” (redundant with v0.1 Table 27 and Table 28, now <a href="#">Table 29</a> and <a href="#">Table 30</a> )                                                                                         |                 |
|                                  | — <a href="#">Table 26</a> updates                                                                                                                                                                                                           | 24              |
|                                  | — Deleted previous spec M6                                                                                                                                                                                                                   |                 |
|                                  | — Changed spec <a href="#">N7</a> and <a href="#">N8</a> values                                                                                                                                                                              |                 |
|                                  | — <a href="#">Table 27</a> updates                                                                                                                                                                                                           | 24              |
|                                  | — Deleted previous spec N6                                                                                                                                                                                                                   |                 |
|                                  | — Changed spec <a href="#">P7</a> and <a href="#">P8</a> values                                                                                                                                                                              |                 |
|                                  | — Changed spec <a href="#">P2</a> and footnote (1) to specify 3.15 V                                                                                                                                                                         |                 |
|                                  | — <a href="#">Table 28</a> updates                                                                                                                                                                                                           | 25              |
|                                  | — Changed spec <a href="#">Q2</a> parameter classification from T to C and 10 pF and 22 pF values moved from maximum to typical                                                                                                              |                 |
|                                  | — <a href="#">Table 29</a> updates                                                                                                                                                                                                           | 26              |
|                                  | — Operating conditions $V_{DDA}$ minimum changed to 4.5 V                                                                                                                                                                                    |                 |
|                                  | — $V_{REF}$ description moved from “conditions” header to new footnote (1)                                                                                                                                                                   |                 |
|                                  | — <a href="#">Table 30</a> updates                                                                                                                                                                                                           | 26              |
|                                  | — Operating conditions $V_{DDA}$ minimum changed to 3.15 V                                                                                                                                                                                   |                 |
|                                  | — $V_{REF}$ description moved from “conditions” header to new footnote (1)                                                                                                                                                                   |                 |
|                                  | — <a href="#">Table 31</a> updates                                                                                                                                                                                                           | 28              |
|                                  | — Spec <a href="#">T1</a> description clarified, max removed, min added with footnote                                                                                                                                                        |                 |
|                                  | — Spec <a href="#">T2</a> modified to show both edge- and level-sensitive modes                                                                                                                                                              |                 |
|                                  | — <a href="#">Figure 10</a> modified to remove “Max Frequency” label and clearly separate edge- and level-sensitive mode timing examples                                                                                                     | 28              |
|                                  | • <b>Section 3.11, “Serial Peripheral Interface”</b>                                                                                                                                                                                         |                 |
|                                  | — <a href="#">Table 32</a> updates                                                                                                                                                                                                           | 29              |
|                                  | — Changed specs <a href="#">U1a</a> , <a href="#">U1b</a> and <a href="#">U4</a> to use $f_{IPS}$ and $t_{IPS}$ for clarity and consistency with MAC7100RM                                                                                   |                 |
|                                  | — Changed <a href="#">U1a</a> max to ½ and <a href="#">U1b</a> min to 2 to account for the DBR bit                                                                                                                                           |                 |
|                                  | — <a href="#">Table 33</a> updates                                                                                                                                                                                                           | 29              |
|                                  | — Changed specs <a href="#">V1a</a> , <a href="#">V1b</a> , <a href="#">V2</a> , <a href="#">V3</a> , <a href="#">V4</a> , <a href="#">V7</a> , <a href="#">V8</a> to use $f_{IPS}$ and $t_{IPS}$ for clarity and consistency with MAC7100RM |                 |
|                                  | — Changed <a href="#">V1a</a> max to ½ and <a href="#">V1b</a> min to 2 to account for the DBR bit                                                                                                                                           |                 |
|                                  | • <b>Section 3.13, “Common Flash Module”</b>                                                                                                                                                                                                 |                 |
|                                  | — Significant rework to match MAC7100RM clock naming, references and timing calculations for clarity and consistency                                                                                                                         | 32 to 35        |
|                                  | — Changed <a href="#">X1</a> maximum from 40 MHz to 50 MHz ( <a href="#">Table 35</a> )                                                                                                                                                      | 34              |

## Revision History (continued)

| Version No.<br>Release Date      | Description of Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Page<br>Numbers                                                                              |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| v1.0<br>14-Sep-04<br>(continued) | <b>Section 4, “Device Pin Assignments”</b> <ul style="list-style-type: none"> <li>Table 37 and Table 38 added</li> <li>Added PD2 label / footnote to Figure 15, Figure 17, Figure 19, Figure 20 and Figure 22</li> <li>Section 4.2, “MAC7142 Pin Diagram” / Figure 16 added</li> <li>Section 4.3, “MAC7121 / MAC7126 Pin Diagram” / Figure 17 updated <ul style="list-style-type: none"> <li>PB10 / PCS5_B / PCSS_B bonded out on pin 57, footnote for L49P</li> <li>Added MAC71x6 device information</li> </ul> </li> <li>Section 4.4, “MAC7122 Pin Diagram” / Figure 18 added</li> <li>Section 4.5, “MAC7101 / MAC7106 Pin Diagram” / Figure 19 updated <ul style="list-style-type: none"> <li>Added MAC71x6 device information</li> </ul> </li> <li>Section 4.6, “MAC7111 / MAC7116 Pin Diagram” / Figure 20 updated <ul style="list-style-type: none"> <li>Added AS to TA pin</li> <li>Added MAC71x6 device information</li> </ul> </li> <li>Section 4.7, “MAC7112 Pin Diagram” / Figure 21 added</li> <li>Section 4.8, “MAC7131 Pin Diagram” / Figure 22 corrected, updated <ul style="list-style-type: none"> <li>Changed pins C8 &amp; P8 from V<sub>SS</sub>2.5 to V<sub>DD</sub>2.5</li> <li>Changed pin T8 from V<sub>SS</sub>PLL to V<sub>DD</sub>PLL</li> <li>Added AS to TA pin</li> </ul> </li> <li>Section 4.9, “MAC7136 Pin Diagram” / Figure 23 added</li> </ul> | 36, 40<br>41, 43, 45, 46, 48<br>42<br>43<br><br>44<br>45<br><br>46<br><br>47<br>48<br><br>49 |
| v1.1<br>1-Dec-04                 | <b>Section 3, “Electrical Characteristics”</b> <ul style="list-style-type: none"> <li>Section 3.7, “Power Supply” <ul style="list-style-type: none"> <li>Table 15 spec F4 –40° C and 25° C max value changed</li> <li>Table 16 spec G4 –40° C and 25° C max value changed</li> </ul> </li> <li>Section 3.8, “Clock and Reset Generator” <ul style="list-style-type: none"> <li>Table 19 spec J3 typical TBD entry replaced with value</li> <li>Table 20 specs K15 and K16 maximum TBD entries replaced with values</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <br>12<br>12<br><br>15<br>18                                                                 |
| v1.1.1<br>3-Dec-04               | <b>Section 3, “Electrical Characteristics”</b> <ul style="list-style-type: none"> <li>Section 3.7, “Power Supply” <ul style="list-style-type: none"> <li>Table 15 spec F3 –40° C, 25° C and 125° C typ and max values and unit changed</li> <li>Table 16 spec G3 –40° C, 25° C and 125° C typ and max value and unit changed</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <br>12<br>12                                                                                 |
| v1.2<br>10-Feb--06               | <b>Section 1, “Overview”</b> <ul style="list-style-type: none"> <li>Moved 71x6 device numbers from footnote to “covered” list</li> </ul> <b>Section 2, “Ordering Information”</b> <ul style="list-style-type: none"> <li>Added AF, AG and VM package identifiers to Figure 1</li> <li>Added 1L38Y to Table 1</li> </ul> <b>Section 3, “Electrical Characteristics”</b> <ul style="list-style-type: none"> <li>Replaced TBD values in Table 15 and Table 16 with final qualification data, changed table titles and footnotes to reflect 71x6 inclusion.</li> </ul> <b>Section 5, “Mechanical Information”</b> <ul style="list-style-type: none"> <li>Removed obsolete package diagrams, replaced with document IDs available on web site.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 1<br><br>2<br>2<br><br>12<br><br>50                                                          |

**This page intentionally left blank.**

## How to Reach Us:

### Home Page:

[www.freescale.com](http://www.freescale.com)

### E-mail:

[support@freescale.com](mailto:support@freescale.com)

### USA/Europe or Locations Not Listed:

Freescall Semiconductor  
Technical Information Center, CH370  
1300 N. Alma School Road  
Chandler, Arizona 85224  
+1-800-521-6274 or +1-480-768-2130  
[support@freescale.com](mailto:support@freescale.com)

### Europe, Middle East, and Africa:

Freescall Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[support@freescale.com](mailto:support@freescale.com)

### Japan:

Freescall Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

### Asia/Pacific:

Freescall Semiconductor Hong Kong Ltd.  
Technical Information Center  
2 Dai King Street  
Tai Po Industrial Estate  
Tai Po, N.T., Hong Kong  
+800 2666 8080  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

### For Literature Requests Only:

Freescall Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or 303-675-2140  
Fax: 303-675-2150  
[LDCForFreescallSemiconductor@hibbertgroup.com](mailto:LDCForFreescallSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescall Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescall Semiconductor reserves the right to make changes without further notice to any products herein. Freescall Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescall Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescall Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescall Semiconductor does not convey any license under its patent rights nor the rights of others. Freescall Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescall Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescall Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescall Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescall Semiconductor was negligent regarding the design or manufacture of the part.

Freescall™ and the Freescall logo are trademarks of Freescall Semiconductor, Inc. The ARM POWERED logo is a registered trademark of ARM Limited. ARM7TDMI-S is a trademark of ARM Limited. All other product or service names are the property of their respective owners.

RoHS-compliant and/or Pb-free versions of Freescall products have the functionality and electrical characteristics of their non-RoHS-compliant and/or non-Pb-free counterparts. For further information, see [www.freescale.com](http://www.freescale.com) or contact your Freescall sales representative.

For information on Freescall's Environmental Products program, go to [www.freescale.com/epp](http://www.freescale.com/epp).

© Freescall Semiconductor, Inc. 2004-2006. All rights reserved.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NXP:](#)

[MAC7101MAG40](#) [MAC7111MAG40](#) [MAC7121MAG40](#) [MAC7131MVF40](#) [MAC7111MAG50](#) [MAC7116VAG50](#)