


D3V

Miniature Basic Switch

Reliable Basic Switch with External Lever


- Available by 21 A, 16 A, 11 A, 6 A and 0.1 A models, all with self-cleaning contacts.
- Available with internally or externally fitted levers.

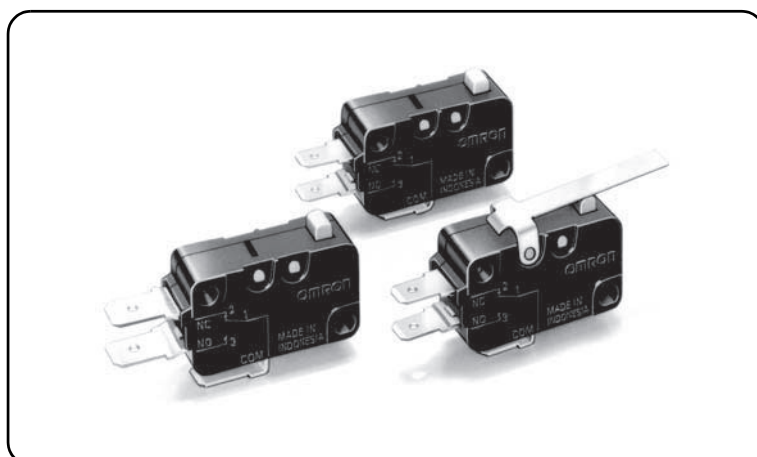


D
3
V

Model Number Legend

D3V-1 2 3 4 - 5 6 7 - 8 - 9								
1. Ratings				5. Contact Form				
21 : 20 (4) A at 250 VAC				1 : SPDT				
16 : 16 (3) A at 250 VAC				2 : SPST-NC				
11 : 11 (3) A at 250 VAC				3 : SPST-NO				
6 : 6 (2) A at 250 VAC				6. Terminals				
01 : 0.1 A at 125 VAC				A : Solder terminals				
2. Contact Gap				C2 : Quick-connect terminals (#187)				
None : 1 mm (F gap)				C : Quick-connect terminals (#250)				
G : 0.5 mm (G gap)				7. Maximum Operating Force				
3. Actuator				5 : 1.96 N {200 gf}				
None : Pin plunger				4A : 1.23 N {125 gf}				
1 : Short hinge lever				4 : 0.98 N {100 gf}				
2 : Hinge lever				3 : 0.49 N {50 gf}				
3 : Long hinge lever				2 : 0.25 N {25 gf}				
4 : Simulated roller lever				Note. These values are for the pin plunger models.				
5 : Short hinge roller lever				8. Mounting Hole Size				
6 : Hinge roller lever				None : 3.1 mm				
4. Hinge Position				K : 2.9 mm				
None : Internal/Far from plunger				9. Special Code				
				None : Standard				
				H : High temperature (125°C) (See note)				
				E : Special rating: 21 (8) A				



K : External/Near plunger



Note. Consult your OMRON sales representative for high temperature models.

List of Models

●21 A (OF: 1.23 N {125 gf})

Ratings	Contact gap	Actuators	Contact form	Terminals Maximum operating force (OF)	Quick-connect terminals (#250) (C)
21 A	0.5 mm (G gap)	 Pin plunger	SPDT	1.23 N {125 gf}	D3V-21G-1C4A
			SPST-NC		---
			SPST-NO		---
		 Short hinge lever	SPDT	1.23 N {125 gf}	D3V-21G1-1C4A
			SPST-NC		---
			SPST-NO		---
		 Hinge lever	SPDT	0.78 N {80 gf}	D3V-21G2-1C4A
			SPST-NC		---
			SPST-NO		---
		 Long hinge lever	SPDT	0.44 N {45 gf}	D3V-21G3-1C4A
			SPST-NC		---
			SPST-NO		---
		 Simulated roller lever	SPDT	0.83 N {85 gf}	D3V-21G4-1C4A
			SPST-NC		---
			SPST-NO		---
		 Short hinge roller lever	SPDT	1.42 N {145 gf}	D3V-21G5-1C4A
			SPST-NC		---
			SPST-NO		---
		 Hinge roller lever	SPDT	0.79 N {80 gf}	D3V-21G6-1C4A
			SPST-NC		---
			SPST-NO		---

Note. If you need mounting hole 2.9 mm, add "-K" at last of model.

Consult your OMRON sales representative when you can't find a model on this List of Models.

●16 A (OF: 1.96 N {200 gf})

Ratings	Contact gap	Actuators	Contact form	Terminals Maximum operating force (OF)	Solder terminals (A)	Quick-connect terminals (#187) (C2)	Quick-connect terminals (#250) (C)
16 A	1 mm (F gap)	 Pin plunger	SPDT	1.96 N {200 gf}	D3V-16-1A5	D3V-16-1C25	D3V-16-1C5
			SPST-NC		D3V-16-2A5	D3V-16-2C25	D3V-16-2C5
			SPST-NO		D3V-16-3A5	D3V-16-3C25	D3V-16-3C5
		 Short hinge lever	SPDT	1.96 N {200 gf}	D3V-161-1A5	D3V-161-1C25	D3V-161-1C5
			SPST-NC		D3V-161-2A5	D3V-161-2C25	D3V-161-2C5
			SPST-NO		D3V-161-3A5	D3V-161-3C25	D3V-161-3C5
		 Hinge lever	SPDT	1.23 N {125 gf}	D3V-162-1A5	D3V-162-1C25	D3V-162-1C5
			SPST-NC		D3V-162-2A5	D3V-162-2C25	D3V-162-2C5
			SPST-NO		D3V-162-3A5	D3V-162-3C25	D3V-162-3C5
		 Long hinge lever	SPDT	0.69 N {70 gf}	D3V-163-1A5	D3V-163-1C25	D3V-163-1C5
			SPST-NC		D3V-163-2A5	D3V-163-2C25	D3V-163-2C5
			SPST-NO		D3V-163-3A5	D3V-163-3C25	D3V-163-3C5
		 Simulated roller lever	SPDT	1.23 N {125 gf}	D3V-164-1A5	D3V-164-1C25	D3V-164-1C5
			SPST-NC		D3V-164-2A5	D3V-164-2C25	D3V-164-2C5
			SPST-NO		D3V-164-3A5	D3V-164-3C25	D3V-164-3C5
		 Short hinge roller lever	SPDT	2.35 N {240 gf}	D3V-165-1A5	D3V-165-1C25	D3V-165-1C5
			SPST-NC		D3V-165-2A5	D3V-165-2C25	D3V-165-2C5
			SPST-NO		D3V-165-3A5	D3V-165-3C25	D3V-165-3C5
		 Hinge roller lever	SPDT	1.23 N {125 gf}	D3V-166-1A5	D3V-166-1C25	D3V-166-1C5
			SPST-NC		D3V-166-2A5	D3V-166-2C25	D3V-166-2C5
			SPST-NO		D3V-166-3A5	D3V-166-3C25	D3V-166-3C5

Note. If you need mounting hole 2.9 mm, add "-K" at last of model.

Consult your OMRON sales representative when you can't find a model on this List of Models.

●11 A (OF: 1.96 N {200 gf})

Ratings	Contact gap	Actuators	Contact form	Terminals Maximum operating force (OF)	Solder terminals (A)	Quick-connect terminals (#187) (C2)	Quick-connect terminals (#250) (C)
11 A	1 mm (F gap)		SPDT	1.96N {200 gf}	D3V-11-1A5	D3V-11-1C25	D3V-11-1C5
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	1.96N {200 gf}	D3V-111-1A5	D3V-111-1C25	D3V-111-1C5
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	1.23N {125 gf}	D3V-112-1A5	D3V-112-1C25	D3V-112-1C5
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	0.69N {70 gf}	D3V-113-1A5	D3V-113-1C25	D3V-113-1C5
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	1.23N {125 gf}	D3V-114-1A5	D3V-114-1C25	D3V-114-1C5
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	2.35N {240 gf}	D3V-115-1A5	D3V-115-1C25	D3V-115-1C5
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	1.23N {125 gf}	D3V-116-1A5	D3V-116-1C25	D3V-116-1C5
			SPST-NC		---	---	---
			SPST-NO		---	---	---

Note. If you need mounting hole 2.9 mm, add "-K" at last of model.

Consult your OMRON sales representative when you can't find a model on this List of Models.

●11 A (OF: 0.98 N {100 gf})

Ratings	Contact gap	Actuators	Contact form	Terminals Maximum operating force (OF)	Solder terminals (A)	Quick-connect terminals (#187) (C2)	Quick-connect terminals (#250) (C)
11 A	1 mm (F gap)		SPDT	0.98N {100 gf}	D3V-11-1A4	D3V-11-1C24	D3V-11-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	0.98N {100 gf}	D3V-111-1A4	D3V-111-1C24	D3V-111-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	0.59N {60 gf}	D3V-112-1A4	D3V-112-1C24	D3V-112-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	0.34N {35 gf}	D3V-113-1A4	D3V-113-1C24	D3V-113-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	0.59N {60 gf}	D3V-114-1A4	D3V-114-1C24	D3V-114-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	1.18N {120 gf}	D3V-115-1A4	D3V-115-1C24	D3V-115-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
			SPDT	0.59N {60 gf}	D3V-116-1A4	D3V-116-1C24	D3V-116-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---

Note. If you need mounting hole 2.9 mm, add "-K" at last of model.

Consult your OMRON sales representative when you can't find a model on this List of Models.

● 6 A (OF: 0.98 N {100 gf})

Ratings	Contact gap	Actuators	Contact form	Terminals Maximum operating force (OF)	Solder terminals (A)	Quick-connect terminals (#187) (C2)	Quick-connect terminals (#250) (C)
6 A	1 mm (F gap)	 Pin plunger	SPDT	0.98 N {100 gf}	D3V-6-1A4	D3V-6-1C24	D3V-6-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Short hinge lever	SPDT	0.98 N {100 gf}	D3V-61-1A4	D3V-61-1C24	D3V-61-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Hinge lever	SPDT	0.59 N {60 gf}	D3V-62-1A4	D3V-62-1C24	D3V-62-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Long hinge lever	SPDT	0.34 N {35 gf}	D3V-63-1A4	D3V-63-1C24	D3V-63-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Simulated roller lever	SPDT	0.59 N {60 gf}	D3V-64-1A4	D3V-64-1C24	D3V-64-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Short hinge roller lever	SPDT	1.18 N {120 gf}	D3V-65-1A4	D3V-65-1C24	D3V-65-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Hinge roller lever	SPDT	0.59 N {60 gf}	D3V-66-1A4	D3V-66-1C24	D3V-66-1C4
			SPST-NC		---	---	---
			SPST-NO		---	---	---

● 6 A (OF: 0.49 N {50 gf})

Ratings	Contact gap	Actuators	Contact form	Terminals Maximum operating force (OF)	Solder terminals (A)	Quick-connect terminals (#187) (C2)	Quick-connect terminals (#250) (C)
6 A	0.5 mm Ggap)	 Pin plunger	SPDT	0.49 N {50 gf}	D3V-6G-1A3	D3V-6G-1C23	D3V-6G-1C3
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Short hinge lever	SPDT	0.49 N {50 gf}	D3V-6G1-1A3	D3V-6G1-1C23	D3V-6G1-1C3
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Hinge lever	SPDT	0.59 N {60 gf}	D3V-6G2-1A3	D3V-6G2-1C23	D3V-6G2-1C3
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Long hinge lever	SPDT	0.20 N {20 gf}	D3V-6G3-1A3	D3V-6G3-1C23	D3V-6G3-1C3
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Simulated roller lever	SPDT	0.29 N {30 gf}	D3V-6G4-1A3	D3V-6G4-1C23	D3V-6G4-1C3
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Short hinge roller lever	SPDT	0.59 N {60 gf}	D3V-6G5-1A3	D3V-6G5-1C23	D3V-6G5-1C3
			SPST-NC		---	---	---
			SPST-NO		---	---	---
		 Hinge roller lever	SPDT	0.29 N {30 gf}	D3V-6G6-1A3	D3V-6G6-1C23	D3V-6G6-1C3
			SPST-NC		---	---	---
			SPST-NO		---	---	---

Note. If you need mounting hole 2.9 mm, add "-K" at last of model.

Consult your OMRON sales representative when you can't find a model on this List of Models.

●0.1 A (OF: 0.49 N {50 gf})


Ratings	Contact gap	Actuators	Contact form	Terminals Maximum operating force (OF)	Solder terminals (A)	Quick-connect terminals (#187) (C2)	Quick-connect terminals (#250) (C)
0.1 A	1 mm (F gap)	 Pin plunger	SPDT	0.49 N {50 gf}	D3V-01-1A3	D3V-01-1C23	D3V-01-1C3
			SPST-NC		D3V-01-2A3	D3V-01-2C23	D3V-01-2C3
			SPST-NO		D3V-01-3A3	D3V-01-3C23	D3V-01-3C3
		 Short hinge lever	SPDT	0.49 N {50 gf}	D3V-011-1A3	D3V-011-1C23	D3V-011-1C3
			SPST-NC		D3V-011-2A3	D3V-011-2C23	D3V-011-2C3
			SPST-NO		D3V-011-3A3	D3V-011-3C23	D3V-011-3C3
		 Hinge lever	SPDT	0.59 N {60 gf}	D3V-012-1A3	D3V-012-1C23	D3V-012-1C3
			SPST-NC		D3V-012-2A3	D3V-012-2C23	D3V-012-2C3
			SPST-NO		D3V-012-3A3	D3V-012-3C23	D3V-012-3C3
		 Long hinge lever	SPDT	0.20 N {20 gf}	D3V-013-1A3	D3V-013-1C23	D3V-013-1C3
			SPST-NC		D3V-013-2A3	D3V-013-2C23	D3V-013-2C3
			SPST-NO		D3V-013-3A3	D3V-013-3C23	D3V-013-3C3
		 Simulated roller lever	SPDT	0.29 N {30 gf}	D3V-014-1A3	D3V-014-1C23	D3V-014-1C3
			SPST-NC		D3V-014-2A3	D3V-014-2C23	D3V-014-2C3
			SPST-NO		D3V-014-3A3	D3V-014-3C23	D3V-014-3C3
		 Short hinge roller lever	SPDT	0.59 N {60 gf}	D3V-015-1A3	D3V-015-1C23	D3V-015-1C3
			SPST-NC		D3V-015-2A3	D3V-015-2C23	D3V-015-2C3
			SPST-NO		D3V-015-3A3	D3V-015-3C23	D3V-015-3C3
		 Hinge roller lever	SPDT	0.29 N {30 gf}	D3V-016-1A3	D3V-016-1C23	D3V-016-1C3
			SPST-NC		D3V-016-2A3	D3V-016-2C23	D3V-016-2C3
			SPST-NO		D3V-016-3A3	D3V-016-3C23	D3V-016-3C3

Note. If you need mounting hole 2.9 mm, add "-K" at last of model.


Consult your OMRON sales representative when you can't find a model on this List of Models.

Contact Form


●SPDT



●SPST-NC



●SPST-NO



Contact Specifications

Item	Model	D3V-21	D3V-16	D3V-11	D3V-6	D3V-01
Contact	Specification	Rivet				Crossbar
	Material	Silver alloy				Gold alloy
	Gap (standard value)	0.5 mm	1.0 mm (F gap) or 0.5 mm (G gap)			1.0 mm
Inrush current	NC	50 A max.	40 A max.	24 A max.	15 A max.	---
	NO					
Minimum applicable load (see note)		160 mA at 5 VDC				1 mA at 5 VDC

Note. For more information on the minimum applicable load, refer to *Using Micro Loads* on page 11.

Ratings

Model	Rated voltage	Item	Resistive load
D3V-21	250 VAC		21 A
	125 VDC		0.6 A
	250 VDC		0.3 A
D3V-16	250 VAC		16 A
	125 VDC		0.6 A
	250 VDC		0.3 A
D3V-11	250 VAC		11 A
	125 VDC		0.6 A
	250 VDC		0.3 A
D3V-6	250 VAC		6 A
	125 VDC		0.4 A
	250 VDC		0.3 A
D3V-01	125 VAC		0.1 A
	30 VDC		0.1 A

Note 1. The above current values are the normal current values of models with a contact gap of 1 mm (gap F), which vary with the normal current values of models with a contact gap of 0.5 mm (gap G).

Note 2. The ratings values apply under the following test conditions:

Ambient temperature: 20±2°C

Ambient humidity: 65±5%

Operating frequency: 30 operations/min

Approved Safety Standards

Consult your OMRON sales representative for specific models with standard approvals.

UL (UL61058-1)/cUL (CSA C22.2 No. 61058-1)

Rated voltage	Model	D3V-21G	D3V-16	D3V-16G	D3V-11	D3V-11G	D3V-6	D3V-6G	D3V-01
125 VAC		---	16 A, 1/2 HP	16 A, 1/2 HP	11 A, 1/2 HP	11 A, 1/2 HP	6 A, 1/4 HP	6 A, 1/4 HP	0.1 A
250 VAC		20.1 A	16 A, 1/2 HP	16 A, 1/2 HP	11 A, 1/2 HP	11 A, 1/2 HP	6 A, 1/4 HP	6 A, 1/4 HP	---
125 VDC		---	0.6 A	0.1 A	0.6 A	0.1 A	---	---	---
250 VDC		---	0.3 A	---	0.3 A	---	---	---	---

VDE (EN 61058-1)

Rated voltage	Model	D3V-21G	D3V-16	D3V-11	D3V-6	D3V-01
125 VAC		---	---	---	---	0.1 A
250 VAC		20 (4) A	16 (3) A	11 (3) A	6 (2) A	---

Testing conditions: 5E4 (50,000 operations), T85 (0 to 85°C) for D3V-21/D3V-01, T105 (0 to 105°C) for D3V-16/D3V-11/D3V-6

Rated voltage	Model	D3V-21G
250 VAC		21 (8) A

Testing conditions: 10,000 operations, T85 (0 to 85°C)

Characteristics

Item	Model	D3V-21	D3V-16	D3V-11	D3V-6	D3V-01
Permissible operating speed		0.1 mm to 1 m/s (pin plunger models)				
Permissible operating frequency		Mechanical: 600 operations/min max. Electrical: 30 operations/min max.				
Insulation resistance		100 MΩ min. (at 500 VDC with insulation tester)				
Contact resistance (initial values)		50 mΩ max.	30 mΩ max.			0.49N {50 gf}: 50 mΩ max. 0.25N {25 gf}: 100 mΩ max.
Dielectric strength (see note 2)		1,000 VAC, 50/60 Hz for 1 min between terminals of the same polarity				
		2,000 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground, and between each terminal and non-current-carrying metal parts				
Vibration resistance (see note 3)		Malfunction: 10 to 55 Hz, 1.5-mm double amplitude				
Shock resistance (see note 3)		Destruction: 400 m/s ² {approx. 40 G} max. Malfunction: 100 m/s ² {approx. 10 G} max.				
Durability (see note 4)	Mechanical	10,000,000 operations min.				
	Electrical	50,000 operations min.	100,000 operations min.	200,000 operations min.	500,000 operations min.	
Degree of protection		IEC IP40				
Degree of protection against electric shock		Class I				
Ambient operating temperature		−25 to +85°C (at ambient humidity of 60% max.) (with no icing or condensation)	−25 to +105°C (at ambient humidity of 60% max.) (with no icing or condensation)			−25 to +85°C (at ambient humidity of 60% max.) (with no icing or condensation)
Ambient operating humidity		85% max. (for +5 to +35°C)				
Weight		Approx. 6.2 g (pin plunger models)				

Note 1. The data given above are initial values.

Note 2. The dielectric strength values shown in the table are for models with a Separator.

Note 3. For the pin plunger models, the above values apply for use at both the free position and total travel position. For the lever models, they apply at the total travel position.


Note 4. For testing conditions, contact your OMRON sales representative.

Terminals/Appearences (Unit: mm)

Solder Terminals (A)	Quick-connect Terminals (#187) (C2)	Quick-connect Terminals (#250) (C)
t = 0.5 (10) Three, solder terminals	t = 0.5 (10) Three, quick-connect terminals (#187)	t = 0.8 (12.0) Three, quick-connect terminals (#250)
6.35 3.2 (see note) 4.75±0.1 2.4 dia. 1.6 dia. Note: Indicates the length to the center of the 1.6-dia. holes	6.35 3.2 4.75±0.1 1.6-dia. terminal hole	8 3.95 6.35±0.1 1.65-dia. terminal hole

Note. The table below is for the SPDT contact specifications. Two terminals will be available for SPST-NO or SPST-NC contact specifications. For terminal positions, refer to Contact Form on page 5.

Mounting Holes (Unit: mm)




Dimensions (Unit: mm) and Operating Characteristics

The following illustrations and drawings are for quick-connect terminals (#187) (terminals C2). D3V models incorporate terminals A and C. These models are different from #187 models in terminal size only. Terminals A and C are omitted from the following drawings. Refer to "Terminals/Appearances" on page 7 for these terminals. The □ in the model number is for the terminal code.

●Pin Plunger Models


- D3V-21G-1C4A
- D3V-16-1□5
- D3V-11-1□5
- D3V-11-1□4
- D3V-6-1□4
- D3V-6G-1□3
- D3V-01-1□3

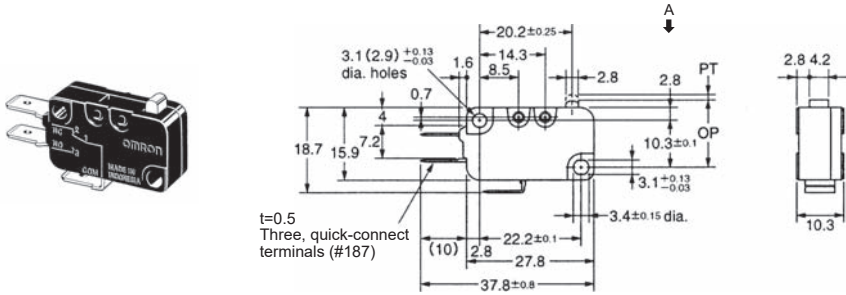

Model			D3V-21G-1C4A	D3V-16-1□5 D3V-11-1□5	D3V-11-1□4 D3V-6-1□4	D3V-6G-1□3	D3V-01-1□3
Operating Characteristics							
Operating Force	OF	Max.	1.23 N {125 gf}	1.96 N {200 gf}	0.98 N {100 gf}	0.49 N {50 gf}	
Releasing Force	RF	Min.	0.20 N {20 gf}	0.49 N {50 gf}	0.15 N {15 gf}	0.05 N {5 gf}	
Pretravel	PT	Max.	1.2 mm	1.2 mm		1.2 mm	1.2 mm
Overtravel	OT	Min.	1.0 mm	1.0 mm		1.0 mm	1.0 mm
Movement Differential	MD	Max.	0.3 mm	0.4 mm		0.3 mm	0.4 mm
Operating Position	OP		14.7±0.4 mm				

●Short Hinge Lever Models


- D3V-21G1-1C4A
- D3V-161-1□5
- D3V-111-1□5
- D3V-111-1□4
- D3V-61-1□4
- D3V-6G1-1□3
- D3V-011-1□3

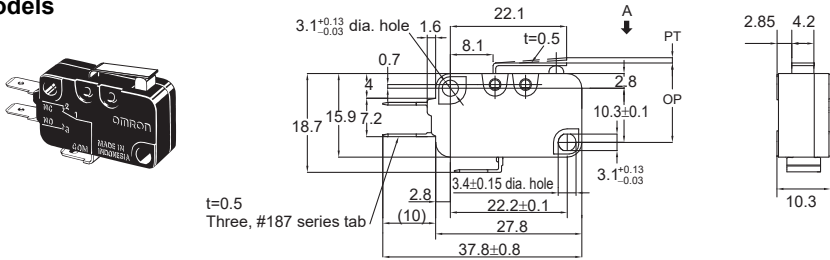

Model			D3V-21G1-1C4A	D3V-161-1□5 D3V-111-1□5	D3V-111-1□4 D3V-61-1□4	D3V-6G1-1□3	D3V-011-1□3
Operating Characteristics							
Operating Force	OF	Max.	1.23 N {125 gf}	1.96 N {200 gf}	0.98 N {100 gf}	0.49 N {50 gf}	
Releasing Force	RF	Min.	0.20 N {20 gf}	0.49 N {50 gf}	0.15 N {15 gf}	0.05 N {5 gf}	
Pretravel	PT	Max.	1.6 mm	1.6 mm		1.6 mm	1.6 mm
Overtravel	OT	Min.	0.8 mm	0.8 mm		0.8 mm	0.8 mm
Movement Differential	MD	Max.	0.5 mm	0.6 mm		0.5 mm	0.6 mm
Operating Position	OP		15.2±0.5 mm				

●Hinge Lever Models

- D3V-21G2-1C4A
- D3V-162-1□5
- D3V-112-1□5
- D3V-112-1□4
- D3V-62-1□4
- D3V-6G2-1□3
- D3V-012-1□3

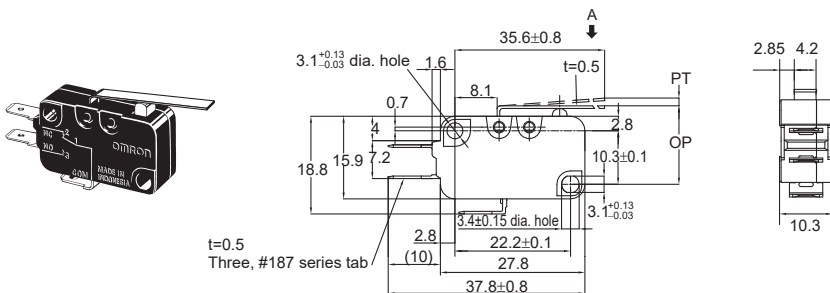

Model			D3V-21G2-1C4A	D3V-162-1□5 D3V-112-1□5	D3V-112-1□4 D3V-62-1□4	D3V-6G2-1□3	D3V-012-1□3
Operating Characteristics							
Operating Force	OF	Max.	0.78 N {80 gf}	1.23 N {125 gf}	0.59 N {60 gf}	0.29 N {30 gf}	
Releasing Force	RF	Min.	0.06 N {6 gf}	0.14 N {14 gf}	0.06 N {6 gf}	----	
Pretravel	PT	Max.	4.0 mm	4.0 mm		4.0 mm	4.0 mm
Overtravel	OT	Min.	1.6 mm	1.6 mm		1.6 mm	1.6 mm
Movement Differential	MD	Max.	0.8 mm	1.5 mm		0.8 mm	1.5 mm
Operating Position	OP		15.2±1.2 mm				

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.
Note 2. The operating characteristics are for operation in the A direction (↓).

●Long Hinge Lever Models

D3V-21G3-1C4A

D3V-163-1□5



D3V-113-1□5

D3V-113-1□4

D3V-63-1□4

D3V-6G3-1□3

D3V-013-1□3

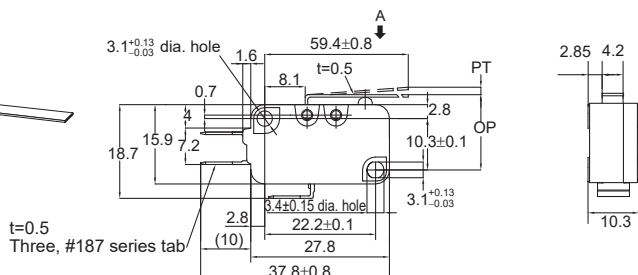

Model			D3V-21G3-1C4A	D3V-163-1□5 D3V-113-1□5	D3V-113-1□4 D3V-63-1□4	D3V-6G3-1□3	D3V-013-1□3
Operating Characteristics							
Operating Force	OF	Max.	0.44 N {45 gf}	0.69 N {70 gf}	0.34 N {35 gf}	0.20 N {20 gf}	
	RF	Min.	0.03 N {3 gf}	0.06 N {6 gf}	---	---	
Pretravel	PT	Max.	9.0 mm	9.0 mm	9.0 mm	9.0 mm	9.0 mm
Overtravel	OT	Min.	2.0 mm	2.0 mm	2.0 mm	3.2 mm	3.2 mm
Movement Differential	MD	Max.	2.0 mm	2.8 mm	2.8 mm	2.0 mm	2.8 mm
Operating Position	OP		15.2 ^{+2.6} _{-3.2} mm			15.2±2.6 mm	

●Simulated Roller Lever Models

D3V-21G4-1C4A

D3V-164-1□5


D3V-114-1□5

D3V-114-1□4

D3V-64-1□4

D3V-6G4-1□3

D3V-014-1□3

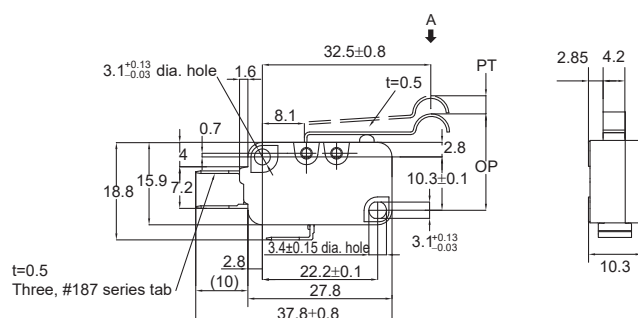

Model			D3V-21G4-1C4A	D3V-164-1□5 D3V-114-1□5	D3V-114-1□4 D3V-64-1□4	D3V-6G4-1□3	D3V-014-1□3
Operating Characteristics							
Operating Force	OF	Max.	0.83 N {85 gf}	1.23 N {125 gf}	0.59 N {60 gf}	0.29 N {30 gf}	
	RF	Min.	0.07 N {7 gf}	0.14 N {14 gf}	0.06 N {6 gf}	---	
Pretravel	PT	Max.	4.0 mm	4.0 mm	4.0 mm	4.0 mm	4.0 mm
Overtravel	OT	Min.	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm
Movement Differential	MD	Max.	1.4 mm	1.5 mm	1.5 mm	1.4 mm	1.5 mm
Operating Position	OP		18.7±1.2 mm				

●Short Hinge Roller Lever Models

D3V-21G5-1C4A

D3V-165-1□5



D3V-115-1□5

D3V-115-1□4

D3V-65-1□4

D3V-6G5-1□3

D3V-015-1□3

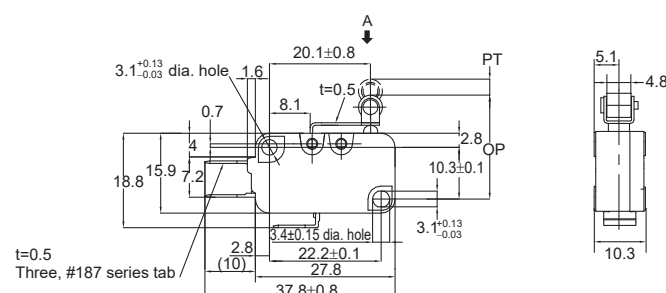

Model			D3V-21G5-1C4A	D3V-165-1□5 D3V-115-1□5	D3V-115-1□4 D3V-65-1□4	D3V-6G5-1□3	D3V-015-1□3
Operating Characteristics							
Operating Force	OF	Max.	1.42 N {145 gf}	2.35 N {240 gf}	1.18 N {120 gf}	0.59 N {60 gf}	
	RF	Min.	0.2 N {20 gf}	0.49 N {50 gf}	0.15 N {15 gf}	0.06 N {6 gf}	
Pretravel	PT	Max.	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm
Overtravel	OT	Min.	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm
Movement Differential	MD	Max.	0.5 mm	0.6 mm	0.6 mm	0.5 mm	0.6 mm
Operating Position	OP		20.7±0.6 mm				

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

●Hinge Roller Lever Models

D3V-21G6-1C4A

D3V-166-1□5


D3V-116-1□5

D3V-116-1□4

D3V-66-1□4

D3V-6G6-1□3

D3V-016-1□3

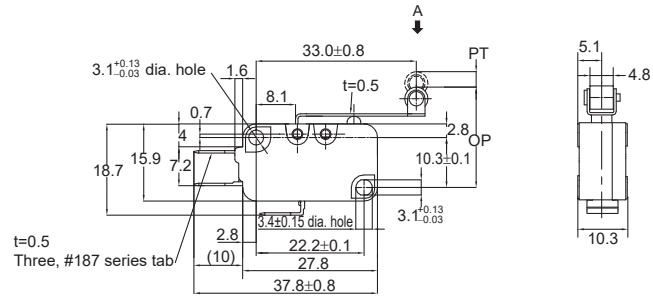

Model			D3V-21G6-1C4A	D3V-166-1□5 D3V-116-1□5	D3V-116-1□4 D3V-66-1□4	D3V-6G6-1□3	D3V-016-1□3
Operating Force	OF	Max.	0.79 N {80 gf}	1.23 N {125 gf}	0.59 N {60 gf}	0.29 N {30 gf}	
Releasing Force	RF	Min.	0.05 N {5 gf}	0.14 N {14 gf}	0.06 N {6 gf}	---	
Pretravel	PT	Max.	4.0 mm	4.0 mm		4.0 mm	4.0 mm
Overtravel	OT	Min.	1.6 mm	1.6 mm		1.6 mm	1.6 mm
Movement Differential	MD	Max.	0.8 mm	1.5 mm		0.8 mm	1.5 mm
Operating Position	OP		20.7±1.2 mm				

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

Precautions

★Please refer to "Common Precautions" for correct use.

Cautions

●Handling

Be careful not to drop the switch. Doing so may cause damage to the switch's internal components because it is designed for a small load.

Correct Use

●Mounting

Use two M3 mounting screws with an appropriate screwdriver to mount the switch. Tighten the screws to a torque of 0.39 to 0.59 N·m {4 to 6 kgf·cm}.

●Mounting Direction


Mount lever-operated switches with a maximum operating force of 0.49 N in a direction where the actuator weight will not be applied to the switch. Since the switch is designed for a small load, its resetting force is small. Therefore, resetting failure may occur if unnecessary load is applied to the switch.

●Insulation Distance

According to EN61058-1, the minimum insulation thickness for this switch should be 1.1 mm and minimum clearance distance between the terminal and mounting plate should be 1.9 mm. If the insulation distance cannot be provided in the product incorporating the switch, either use a switch with insulation barrier or use a Separator to ensure sufficient insulation distance.

●Using Micro Loads

Using a model for ordinary loads to open or close the contact of a micro load circuit may result faulty contact. Use models that operate in the following range. However, even when using micro load models within the operating range shown below, if inrush current occurs when the contact is opened or closed, it may increase contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary. The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% (λ_{60}). The equation, $\lambda_{60} = 0.5 \times 10^{-6}/\text{operations}$ indicates that the estimated malfunction rate is less than 1/2,000,000 operations with a reliability level of 60%.

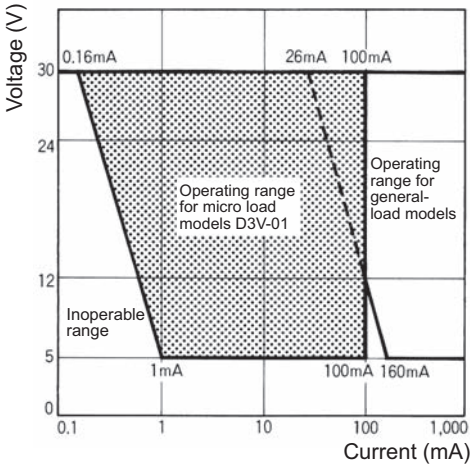

●Solder Terminal Approval Conditions

Soldering iron can be used. Soldering hook hole available.
Soldering terminal types 1 and 2 are met.

Actuator (Sold Separately)

Various Actuators are available as shown on D3V/V/VX/D2MV/D2RV Common Accessories.

Connector (Sold Separately)

Refer to Terminal Connectors.



D
3
V

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact	
Americas https://components.omron.com/us	Europe https://components.omron.com/eu
Asia-Pacific https://components.omron.com/ap	China https://components.omron.com.cn
Korea https://components.omron.com/kr	Japan https://components.omron.com/jp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[D3V-16G2-3C25-K](#) [D3V-11-2A5](#) [D3V-16G-1C25](#) [D3V-11-2C25](#) [D3V-16G-3C25](#) [D3V-16G-1C5](#) [D3V-16G-3C5](#)
[D3V-16G-1A5-K](#) [D3V-11G-1A5-K](#) [D3V-11-2A5-K](#) [D3V-16G-2A5-K](#) [D3V-11G-2A5-K](#) [D3V-16G-3A5-K](#) [D3V-11G-3A5-K](#)
[D3V-16G-2C25-K](#) [D3V-11G-2C25-K](#) [D3V-16G-3C25-K](#) [D3V-11G-3C25-K](#) [D3V-11G-1C5-K](#) [D3V-16G-2C5-K](#) [D3V-16G-3C5-K](#)
[D3V-16G-1C25-K-H](#) [D3V-11G1-1C25-K](#) [D3V-11G2-1C5-K](#) [D3V-11G2-3C25-K](#) [D3V-11G3-1C25-K](#) [D3V-11G4K-3C25](#)
[D3V-11G5-1C25-K](#) [D3V-16G1-1C25-K](#) [D3V-16G1-2C5-K](#) [D3V-16G2-1C5-K](#) [D3V-16G3-1C25-K](#) [D3V-16G3-1C5-K](#)
[D3V-16G3-3C25-K](#) [D3V-16G5-1C25-K](#) [D3V-16G-1C25-K](#) [D3V-11G2-1A5-K](#) [D3V-11G2-2C25-K](#) [D3V-11G4-2C25-K](#)
[D3V-164K-1C5-K-H](#) [D3V-16G2-1A5](#) [D3V-16G2-1C5](#) [D3V-16G4-3C25-K](#) [D3V-16G4-3C5-K](#) [D3V-16G4K-1C25-K](#)
[D3V-16G5-1C25](#) [D3V-16G5-3C25-K](#) [D3V-16G6-1C25](#) [D3V-6G4-1C25](#) [D3V-6G4-1C25-T](#) [D3V-6G4-2C25](#)
[D3V-112K-1C25](#) [D3V-113K-1C25](#) [D3V-163K-1C5-K](#) [D3V-16G3K-1C25-K](#) [D3V-6G-1C25-K-13](#) [D3V-11G6K-1C25-K](#)
[D3V-11G2-1C25-K](#) [D3V-11G4-1C25-K](#) [D3V-11G6-1C25-K](#) [D3V-16G2-1C25-K](#) [D3V-16G4-1C25-K](#) [D3V-16G6-1C25-K](#)
[D3V-11G-1C25-K](#) [D3V-62K-1C5](#) [D3V-6-2C25](#) [D3V-6G5-2C5](#) [D3V-62K-1C25-K](#)
[D3V16G52C25KBYOMI](#) [D3V6G4K1C25BYOMI](#) [D3V1152A5](#) [D3V1133C25](#) [D3V113A5](#) [D3V-11-3A5](#) [D3V-16G3-1C25](#)
[D3V-16G5-2C25-K](#) [D3V-6G4K-1C25](#) [D3V-16G3-1C25 BY OMI](#) [D3V-113-3C25](#) [D3V-6G4K-1C25 BY OMI](#) [D3V-16G5-2C25-K BY OMI](#)
[D3V-115-2A5](#)