## **ON Semiconductor**

### Is Now



To learn more about onsemi<sup>™</sup>, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,



## FUSB252 Evaluation Board Users Guide

*Version 1.1 - 4/6/2018* 

#### **Overview**

The FUSB252 evaluation board is designed to be inserted between a board that contains a Type-C controller (such as FUSB301 or FUSB302) and a source of voltage for OVP testing. Test points on the CC pins will allow OVP test scenarios to test the devices intended function. An LED indicator will show an OVP condition and the device should break connection to the USB host. If there isn't access to a Type-C voltage source, test points (GND and VDD) are available on the board for direct power supply connections.

After performing OVP testing, the Type-C receptacle can accept a Type-C device such as a memory stick to demonstrate normal USB functionality (with SEL=L).



Figure 1 - Board Top View and DP/DM Select Pin Map

## **Board Operation:**

- The FUSB252 datasheet should be consulted for proper voltages.
- Power should be provided via the VDD and GND test points.
- Jumpers are provided for operation of the DP/DM switch. Switch needs to be enabled (OE\=0) to pass through the switch.
- The jumpers also provide the direction of the switch (see above illustration).
  (SEL=L: HS1D+/HS1D-, SEL=H: HS2DP/HS2DM)
- Zero Ohm resistors (R1, R2) connect the SBU pins to the Type-C plug. They can be removed if desired for testing needs.

ON Semiconductor® :: 5005 E. McDowell Road :: Phoenix AZ 85008 :: 602-244-6600 :: fax 602-244-5544

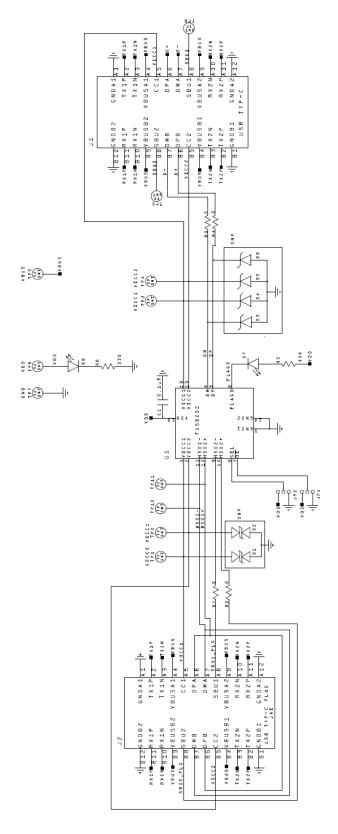


Figure 2 – Board Schematic

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi

FUSB252GEVB