



**Miniature SOP8-pin type
Low C×R High load
voltage of 250V**

**PhotoMOS®
RF SOP 2 Form A C×R
(AQW223R2S)**



mm inch



RoHS compliant

FEATURES

1. With high load voltage of 250V, low output capacitance and low on-resistance.

Output capacitance (C_{out}): Typ. 33 pF
On-resistance (R_{on}): Typ. 11Ω

2. 2-channel (Form A) in miniature SOP8-pin package

(W) 4.4 × (L) 9.37 × (H) 2.1 mm

(W) .173 × (L) .369 × (H) .083 inch

3. Low-level off-state leakage current of Typ. 0.03 nA

4. Controls low-level analog signals

TYPICAL APPLICATIONS

1. Measuring and testing equipment
IC tester, Liquid crystal driver tester, Semiconductor performance tester, Bear board tester, In-circuit tester, Function tester, etc.

2. Telecommunication and broadcasting equipment

3. Medical equipment

4. Multi-point recorder

Data logger, Warming and Thermocouple, etc.

TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side		
AC/DC dual use	250V	0.14A	SOP8-pin	AQW223R2S	AQW223R2SX	AQW223R2SZ	1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.

* Indicate the peak AC and DC values.

Note: The packing style indicator "X" or "Z" is not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	AQW223R2S	Remarks	
Input	LED forward current	I _F	50 mA	
	LED reverse voltage	V _R	5 V	
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW	
Output	Load voltage (peak AC)	V _L	250 V	
	Continuous load current	I _L	0.14 A (0.17 A)	Peak AC, DC (): in case of using only 1a (1 channel)
	Peak load current	I _{peak}	0.42 A	100 ms (1 shot), V _L = DC
Power dissipation	P _{out}	600 mW		
Total power dissipation	P _T	650 mW		
I/O isolation voltage	V _{iso}	1,500 Vrms		
Ambient temperature	Operating	T _{opr}	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)
	Storage	T _{stg}	-40 to +100°C -40 to +212°F	


RF SOP 2 Form A C×R (AQW223R2S)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW223R2S	Condition	
Input	LED operate current	Typical	0.5mA	I _L =Max.	
		Maximum	3.0mA		
	LED turn off current	Minimum	0.1mA	I _L =Max.	
		Typical	0.45mA		
LED dropout voltage	Typical	V _F	1.32V (1.14V at I _F =5mA)	I _F =50mA	
	Maximum		1.5V		
Output	On resistance	Typical	11Ω	I _F =5mA I _L =Max.	
		Maximum	15Ω		
	Output capacitance	Typical	C _{out}	33pF	I _F =0mA f=1 MHz V _B =0V
		Maximum		40pF	
Off state leakage current	Typical	I _{Leak}	0.03nA	I _F =0mA V _L =Max.	
	Maximum		*10nA		
Transfer characteristics	Turn on time**	Typical	0.15ms	I _F =5mA I _L =Max.	
		Maximum	0.5ms		
	Turn off time**	Typical	T _{off}	0.05ms	I _F =5mA I _L =Max.
		Maximum		0.2ms	
	I/O capacitance	Typical	C _{iso}	0.8pF	f=1MHz V _B =0V
		Maximum		1.5pF	
Initial I/O isolation resistance	Minimum	R _{iso}	1,000MΩ	500V DC	

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

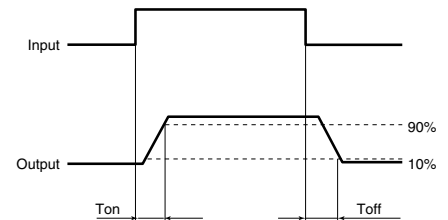

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
LED current	I _F		5	30	mA
Load voltage (Peak AC)	V _L		—	125	V
AQW223R2S	Continuous load current	1ch	—	0.17	A
		2ch	—	0.14	


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

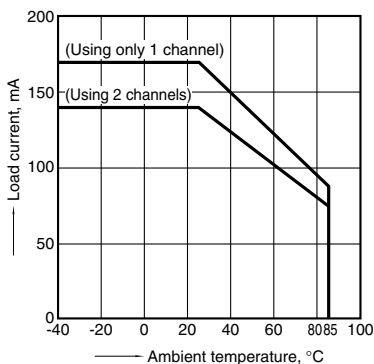


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

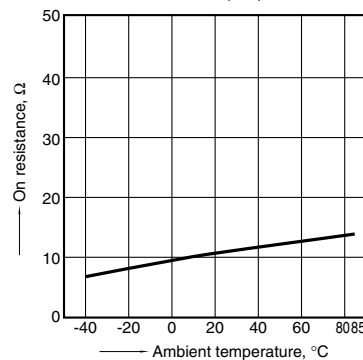


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

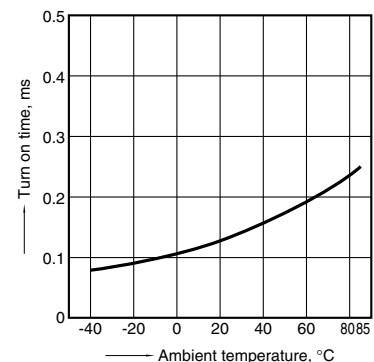


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

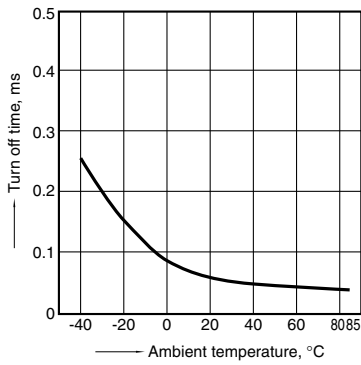


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

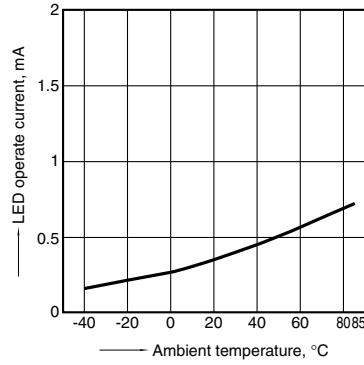


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

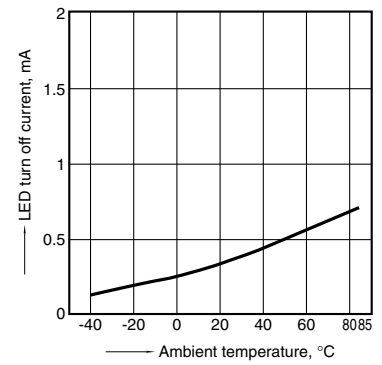


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

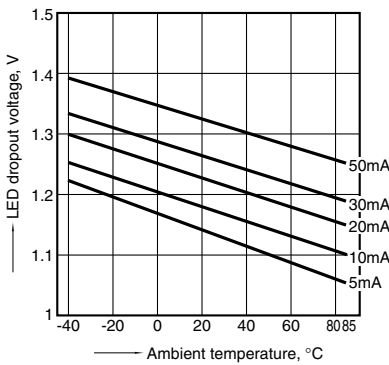


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

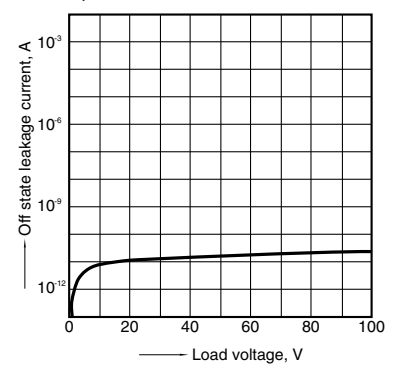


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

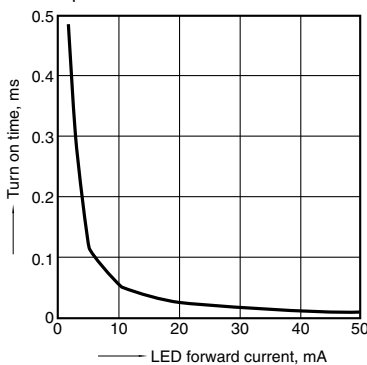


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

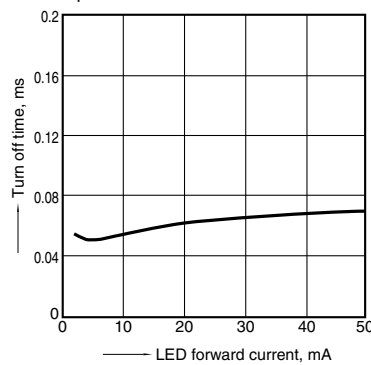

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz, 30mVrms;
Ambient temperature: 25°C 77°F

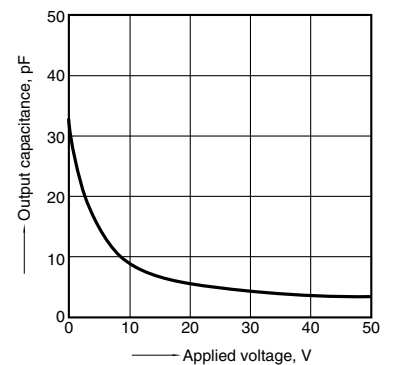

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQV212AZ](#) [AQV215A](#) [AQV217AX](#) [AQW223R2S](#) [AQV210A](#) [AQV210AX](#) [AQV210AZ](#) [AQV214AX](#) [AQV214AZ](#)
[AQV215AX](#) [AQV215AZ](#) [AQV216A](#) [AQV216AX](#) [AQV216AZ](#) [AQV217A](#) [AQV217AZ](#) [AQV214A](#)