


# SmartZone™ G5 Temperature and Humidity Sensors

## specifications

Panduit temperature and humidity sensors are designed to add comprehensive environmental monitoring to any G5 iPDU. Environmental sensors are designed with an embedded microchip that converts analog signals to digital format before data travels to the iPDU, providing greater data accuracy. This smart design also enables easy plug and play installation that takes just moments to complete. Installation of the sensors and ongoing equipment maintenance is further facilitated by the use of the quick disconnect coupler and Ethernet patch cord, which allow for the convenient extension of sensors, movement of equipment, and an easy disconnect method for removing rack enclosure doors.

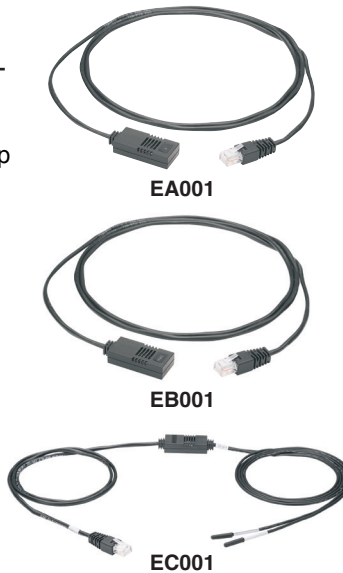

### SmartZone™ G5 Temperature and Humidity Sensors

<b>Temperature sensor:</b>	EA001
<b>Temperature and humidity sensor:</b>	EB001
<b>3 Temperature and humidity sensor:</b>	EC001

## technical information

<b>Dimensions:</b>	1.23 x 0.70 x 0.40 inches (44 x 21 x 11 mm)
<b>Mounting:</b>	Cable ties

\*Mounting hardware included

## key features and benefits

<b>RJ45 connection</b>	Utilizes an RJ45 plug socket to allow standard patch cord connection
<b>Versatile mounting</b>	Offers versatile mounting options to accommodate easy deployment inside a rack or within a room within a data center or facility building
<b>Plugs directly to the iPDU</b>	Simplifies installation as it self-identifies to the G5 iPDU firmware

## applications

The SmartZone™ G5 Temperature and Humidity Sensors are designed to add comprehensive environmental monitoring to any iPDU. Secure the sensors to the cabinet or door using cable ties; a magnet has been added to the rear of the sensor to aid in placement. The accessory connects to the iPDU, or Sensor Hub (EF001), via RJ45 quick disconnect coupler and Ethernet patch cord.

# SmartZone™ G5 Temperature and Humidity Sensors

## technical specification

Electrical	
Operational Voltage	5V DC
Accuracy	±2°C ±5% RH at 5-50°C 10~90% RH
Measuring Range	0°C~+65°C, 10 – 90% RH, non-condensing
Physical	
Length	2 m
Environmental	
Elevation Above MSL (Operating/Storage)	0 – 10000 feet (0 – 3048m)/0-50000 feet (0 – 15240 m)
Temperature (Operating/Storage)	0°C~+65°C (32~149°F)/-20~ + 70°C (-4 ~ 158°F)
Humidity (Operating/Storage)	0 – 95% RH, non-condensing (storage) 10 – 90% RH, non-condensing (operating)
Compliance	
Environmental Verification	ROHS, WEEE



**Temperature Sensor or  
Temperature + Humidity  
Sensor**




**3 Temperature &  
Humidity Sensor**

**Cable Ties**



**RJ45 Quick  
Disconnect Coupler  
Sold Separately**  
Panduit  
Part Number:  
CC5E88BL



**Standard Ethernet  
Extension Cable  
Sold Separately**  
**2.0m length**  
Panduit  
Part Number:  
UTP28CH2MBL



### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

**For more information**

**Visit us at [www.panduit.com](http://www.panduit.com)**

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT®**

©2018 Panduit Corp.  
ALL RIGHTS RESERVED.  
**PUSP71--WW-ENG**  
1/2018

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[EC001](#) [EA001](#) [EB001](#)