
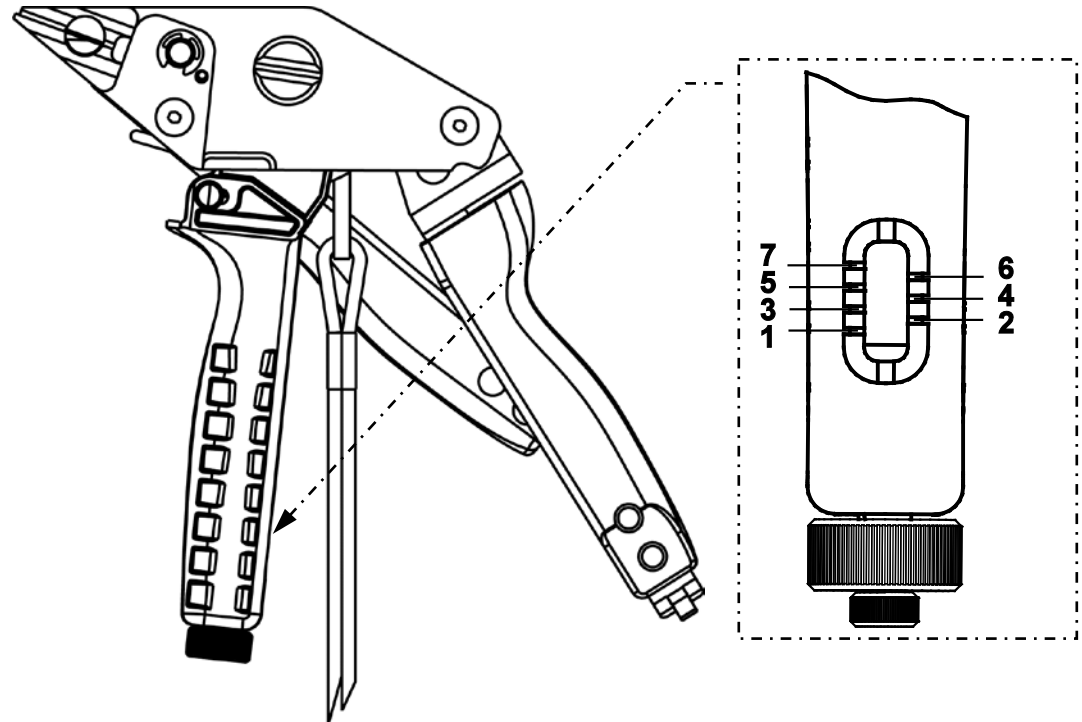


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

POSITION	LOAD @ "DETENT"		TOLERANCE	
	LBS.	NEWTONS	LBS.	NEWTONS
1	69	307	+/- 50 LBS	222
2	130	578	+/- 100 LBS	445
3	206	921	+/- 100 LBS	445
4	271	1205	+/- 100 LBS	445
5	311	1383	+/- 100 LBS	445
6	379	1686	+/- 100 LBS	445
7	450	2002	+/- 100 LBS	445

ACCURACY OF LOAD @ DETENT DEPENDS
UPON MATCHING THE INDICATOR LINE
EXACTLY WITH THE DESIRED SETTING



							BT2HT TENSION ROD FORCE @ DETENT					
							CONTROL DRAWING					
							ITEM REVISION NAME: TM25767A01_02					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± --- (.xxx) ± --- (.xx) ± --- ANGLES ± ---				MATERIAL: -----	
02	9-07-17	BLR	ABJ	JADE	ADDED NEWTON DATA	13959	 THIRD ANGLE PROJECTION				DRAWING NUMBER: TM25767A01	
01	3-12-13	BLR	BJPU	ABJ	UPD TEMPLATE & BRANDING	NONE						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY: BLR	DATE: 4-29-08	CHK BJPU	SCALE NONE	SHT 1 OF 1	SIZE A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

BT2HT