


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART #	WIRE RANGE AWG [mm <sup>2</sup> ]	TAB SIZE in. [mm]	HOUSING COLOR	MAX WIRE INSUL DIA	DIMENSIONS in. [mm]			WIRE STRIP LENGTH in. [mm] +1/32 [0,8] -0	TOOLS
					L ± .04 [1,1]	W ± .01 [0,3]	M ± .02 [0,6]		
EDNF18-187MB	#22-16 [0.5-1.5]	.187 X .032 [4.8 X 0.8]	RED	0.145 [3.7]	0.79 [20.0]	0.19 [4.8]	.43 [11.0]	9/32 [6.8]	KST2000C
EDNF14-187MB*	#16-14 [1.5-2.5]		BLUE	0.165 [4.2]	0.79 [20.0]	0.19 [4.8]	.43 [11.0]		

\*NOT UL LISTED

NOTES:

- UL LISTED FOR:
  - STRANDED COPPER WIRE ONLY - INTERNAL WIRING
  - 221°F (105°C) MAX TEMP RATING
  - 300V MAX VOLTAGE RATING
- MATERIAL:
  - STAMPING: .016" [0.4] THICK BRASS, TIN PLATED
  - HOUSING: NYLON
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

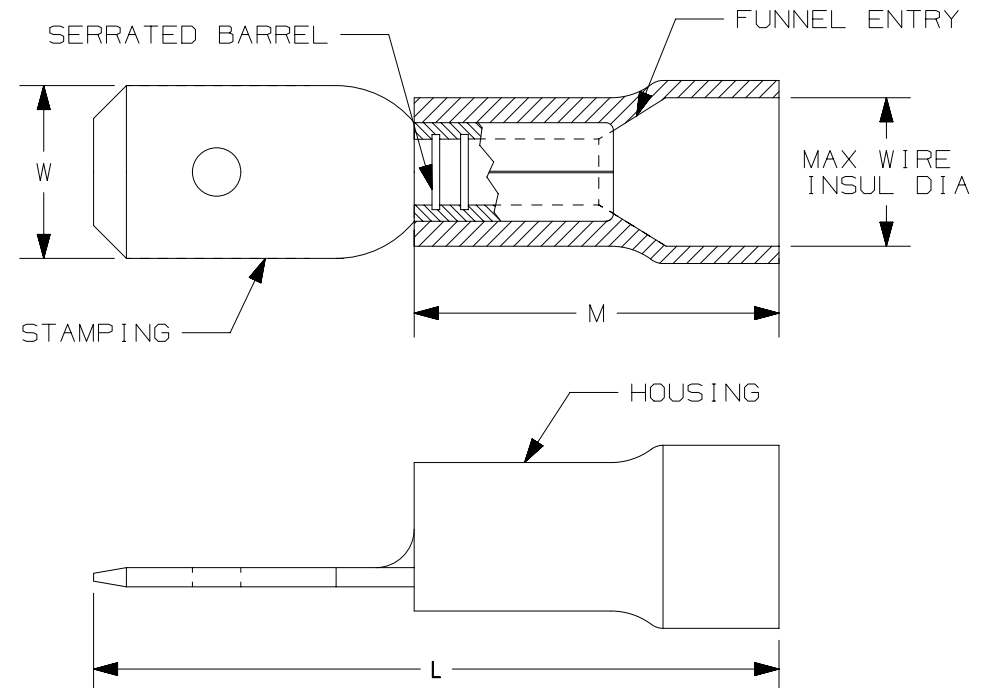

							TITLE STRONGHOLD MALE DISCONNECTS (187 SERIES) NYLON INSULATED #22-14 AWG CUSTOMER DRAWING						
							ITEM REVISION NAME 00123SSM/00						
							DATASET FILE NAME 00123SSM_DC/00						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ] .x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °		MATERIAL:  SEE NOTES				
							 THIRD ANGLE PROJECTION		DRAWING NUMBER: 00123SSM-DC				
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS	DRAWN BY JHNU		DATE -	CHK RLS	SCALE N.T.S.	SHEET 1 OF 1	SIZE A
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN							

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[EDNF14-187MB-Q](#) [EDNF18-187MB-Q](#)