
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	STUD SIZE	DIMENSIONS in [mm]					
PANDUIT PART #		A ± [0,8]	W ± .01 [0,3]	C ± .02 [0,51]	03 [0,8]	H± .01 [0,3]	
PV22-2R	#2	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.10 [2,54]	
PV22-4R	#4	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.12 [3,05]	
PV22-6R	#6	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.15 [3,81]	
PV22-8R	#8	.78 [19,81]	.26 [6,60]	.26 [6,60]	.65 [16,51]	.17 [4,32]	
PV22-10R	#10	.78 [19,81]	.32 [8,13]	.24 [6,10]	.62 [15,75]	.20 [5,08]	

INSTALLATION TOOLS CT-520 CT-1525 (A POCKET)

CT-2500 (CT-2525CH: A PKT)

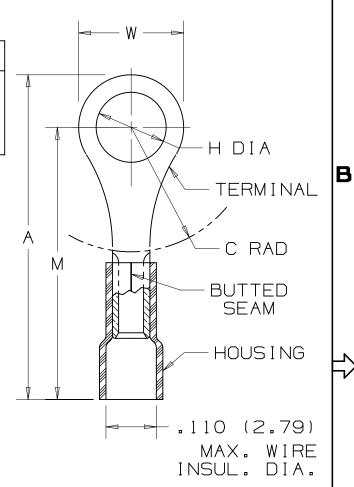

NOTES:

В

- 1. RECOMMENDED FOR:
- A. #26-22 AWG SOLID OR STRANDED COPPER WIRE
- B. 221°F [105°C] MAX TEMP. RATING
- C. 600V MAX VOLTAGE RATING
- 2. MATERIAL:
 - A. STAMPING .02" [0,5] THK COPPER, TIN PLATED
 - B. HOUSING VINYL, YELLOW
- 3. SEE www.panduit.com FOR PACKAGE QUANTITIES
- 4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- 5. WIRE STRIP LENGTH: $3/16^{\circ}$ $+1/32 \atop -0$ [4,8mm $^{+0,8}_{-0}$]

	TITLE						
	RING TERMINAL, VINYL INSULATED #26-22 AWG customer drawing						
	ITEM REVISION NAME N41230BA/11			DAMBUT			
	DATASET FILE NA		0BA/11	PANDUIT			
230	UNLESS OTHERWISE SPECIFIED.				MATERIAL:		
230	± x. .xx.		JXXX ± AMBLES ±		SEE NOTES		
230	0 THIRD ANGLE PROJECTION		DRAWING NUMBER: A41230				
		DATE	СНК	SCALE		SIZE	
	DAW		CJH	NONE	SHT 1 OF 1	ΑI	

11	8/19	MRJS SKB	JADE	REMOVED NOTE WITH ROHS DIRECTIVE NUMBER - SEE WEBSITE	051121/00	
10	4/15	TMR	JHNU	RGB	ADDED A POCKET WITH CT-1525, CT-2500 TOOLS	N41230BA-A41230
09	1/14	JHNU	JHNU	RGB	ADDED WIRE TO MAX. INSUL. DIA.	N41230BA-A41230
08	08 11/13 JHNU JHNU RGB BUTTED SEAM WAS BRAZED SEAM REV DATE BY CHK APR DESCRIPTION		RGB	BUTTED SEAM WAS BRAZED SEAM	N41230BA-A41230	
REV			ECN			

D10100DA/16

2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:
PV22-2R-MYY