THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

- I									
	PANDUIT	STUD	DIMENSIONS in [mm]						
	PART #	SIZE	A ± .03 [0,8]	W ± ^{.01} [0,3]	C ± .02 [0,51]	M ± ^{.03} [0,8]	H± .01 [0,3]		
3	PV22-2R	#2	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.10 [2,54]		
	PV22-4R	#4	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.12 [3,05]		
	PV22-6R	#6	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.15 [3,81]		
	PV22-8R	#8	.78 [19,81]	.26 [6,60]	.26 [6,60]	.65 [16,51]	.17 [4,32]		
	PV22-10R	#10	.78 [19,81]	.32 [8,13]	.24 [6,10]	.62 [15,75]	.20 [5,08]		

A. #26-22 AWG SOLID OR STRANDED COPPER WIRE

A. STAMPING - .02" [0,5] THK COPPER, TIN PLATED

3. SEE www.panduit.com FOR PACKAGE QUANTITIES


5. WIRE STRIP LENGTH: $3/16^{"} + \frac{1}{32} = [4,8mm_{-0}^{+0,8}]$

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

B. 221°F [105°C] MAX TEMP. RATING C. 600V MAX VOLTAGE RATING

B. HOUSING - VINYL, YELLOW

2

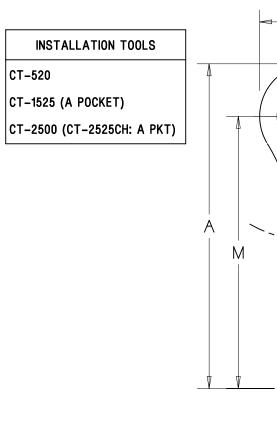

TITLE

A TERMINAL A C RAD BUTTED SEAM HOUSING

MAX. WIRE Insul. dia. В

Α

Α							RING TERMINAL, VINYL INSULATED #26-22 AWG						
							CUSTOMER DRAWING						
								item revision name N41230BA/11			PANDUIT		
	11	11 8/19 MRJS SKB JADE REMOVED NOTE WITH ROHS DIRECTIVE NUMBER – SEE WEBSITE		051121/00	DATASET FILE NAME N41230BA/11								
31/V000101C	10	4/15	TMR	JHNU	RGB	ADDED A POCKET WITH CT-1525, CT-2500 TOOLS	N41230BA-A41230	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL:		
	09	1/14	JHNU	JHNU	RGB	ADDED WIRE TO MAX. INSUL. DIA.	N41230BA-A41230	± X. ± XX.		JXXX ± Amales ±		SEE NOTES	
	08	11/13	JHNU	JHNU	RGB	BUTTED SEAM WAS BRAZED SEAM	N41230BA-A41230		$\exists - \bigcirc$	- HIRD ANGLE PROJECTION		DRAWING NUMBER: A41230	
	REV	DATE	ВҮ	снк	APR	DESCRIPTION	ECN	DRAWN BY	DATE	снк	scale NONE	SHT 1 0F 1	SIZE A
	2									1			

В

NOTES:

2. MATERIAL:

1. RECOMMENDED FOR:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit: PV22-6R-CYY PV22-6R-MYY