

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

HSTTPN 50 - 438 0 C

COLOR
C = CLEAR

QUANTITY PER CARTON (48 IN ONLY)

X = 10pcs.
O = 25pcs.
L = 50pcs.

LENGTH

INCHES


4.38
7.13
7.5
7.8
9.3
10.0
48.0

FEET:
C=100

TUBING SIZE - EXPANDED I.D.

HSTTPN = THIN WALL NON- CROSSLINKED PVC HEAT SHRINK

PANDUIT PART NUMBER	Min. Exp. I.D. In. (mm)	Max. Rec. I.D. In. (mm)	MIN RECOVERED WALL In. (mm)
HSTTPN50	0.462 (11.74)	0.250 (6.35)	0.022 (0.559)
HSTTPN62	0.562 (14.3)	0.313 (7.95)	0.027 (0.686)
HSTTPN75	0.697 (17.70)	0.375 (9.53)	0.027 (0.686)
HSTTPN100	0.900 (22.86)	0.500 (12.70)	0.030 (0.762)
HSTTPN150	1.395 (35.43)	0.750 (19.05)	0.030 (0.762)
HSTTPN200	1.800 (45.72)	1.000 (25.40)	0.039 (.991)

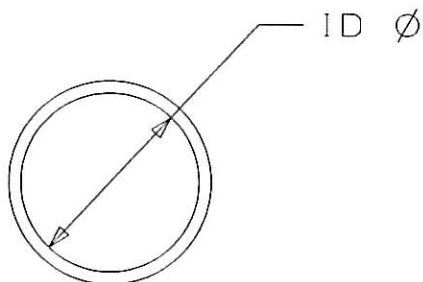

NOTES:

- SHRINK RATIO: 2:1
- MATERIAL: NON-CROSSLINKED PVC
- "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE."

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS G03597HN_DC_GB02390C/00A

PANDUIT

CORP. TINLEY PARK, ILLINOIS

PVC NON-CROSSEDLINKED
HSTTPN THIN WALL HEAT
SHRINKABLE TUBING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 (1.3) (XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
T. SAMPLES

MAT'L:

SCALE NONE

DATE
12-2-09

SEE NOTES

DRAWING NO.

GB02390C

DWG
A
SIZE

00A	12-09	TMSA	INITIAL RELEASE	GB02390C	00A		
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[HSTTPN50-438-L](#) [HSTTPN50-713-Q](#) [HSTTPN150-925-X](#) [HSTTPN75-775-Q](#) [HSTTPN100-CC](#) [HSTTPN62-CC](#)
[HSTTPN150-CC](#) [HSTTPN50-CC](#) [HSTTPN200-950-X](#) [HSTTPN75-CC](#) [HSTTPN100-775-Q](#) [HSTTPN62-750-Q](#)
[HSTTPN200-CC](#)