

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| ۸ | | | | | | \bigwedge | Â | | | | Ĥ | | | |
|----------|----------------|---|--------------------------|-----------------|--------------------------------|-------------|-------------|-------------|-------------|-----------|-------------|-------------|-------------|---------------|
| B | | WIRE RANGE R COPPER | CURRENT RATING (AMPS) | STUD SIZE IN | DIMENSIONS - IN [MM] +/02 [.5] | | | | | | | | | |
| , | PART NUMBER | | | | А | D DIA | w | G | с | т | F | н | М | HEX KEY* |
| | CB25-18-CY | #14 - #10 | 25 | 1/8 | 1.00 [25.4] | 0.14 [3.6] | .31 [7.9] | .20 [5.1] | .28 [7.1] | .07 [1.8] | .26 [6.6] | 0.36 [9.1] | 0.28 [7.1] | SLOTTED SCREW |
| | CB35-36-CY | #14 - #6 (2) #10 AWG (2) #12 AWG (2) #14 AWG (1) #10 AWG WITH (1) #12 AWG (1) #12 AWG WITH (1) #14 AWG | 50 | 3/16 | 1.24 [31.5] | 0.19 [4.8] | .38 [9.7] | .22 [5.6] | .30 [7.6] | .07 [1.8] | .43 [10.9] | 0.49 [12.4] | 0.43 [10.9] | SLOTTED SCREW |
| <u> </u> | CBA70-14SL-CY | #14 - #4 | 70 | 1/4 | 1.31 [33.3] | 0.26 [6.6] | .50 [12.7] | .25 [6.4] | .48 [12.2] | .08 [2.0] | .40 [10.1] | 0.64 [16.3] | 0.50 [12.7] | SLOTTED SCREW |
| | CB70-14-CY | #8-2 (1) #8 AWG WITH (1) #4 AWG (1) #8 AWG WITH (1) #6 AWG | 90 | 1/4 | 1.55 [39.4] | 0.26 [6.6] | .47 [11.9] | .25 [6.4] | .47 [11.9] | .08 [2.0] | .52 [13.2] | 0.64 [16.3] | 0.50 [12.7] | SLOTTED SCREW |
| | CB125-14-QY | #6 - 1/0 | 125 | 1/4 | 1.98 [50.3] | 0.26 [6.6] | .62 [15.7] | .42 [10.7] | .50 [12.7] | .11 [2.7] | .74 [18.7] | 0.88 [22.4] | 0.60 [15.2] | SLOTTED SCREW |
| | CB175-38-QY | #4 - 3/0 | 175 | 3/8 | 2.20 [55.9] | 0.39 [9.9] | .75 [19.0] | .43 [10.9] | .63 [16.0] | .16 [4.0] | .78 [19.8] | 1.01 [25.7] | 0.72 [18.3] | 3/16 |
| | CB225-56-QY | #2 - 4/0 | 225 | 5/16 | 2.55 [64.8] | 0.33 [8.4] | .99 [25.1] | .51 [13.0] | .70 [17.8] | .12 [3.1] | 1.02 [25.8] | 1.13 [28.7] | 0.94 [23.9] | 3/16 |
| | CB300-38-QY | 1/0 - 350 | 300 | 3/8 | 2.83 [71.9] | 0.39 [9.9] | .99 [25.1] | .51 [13.0] | .70 [17.8] | .12 [3.1] | 1.03 [26.2] | 1.39 [35.3] | 1.23 [31.2] | 5/16 |
| | CB400-38-3Y | 1/0 - 500 | 400 | 3/8 | 4.09 [103.9] | 0.39 [9.9] | 1.50 [38.0] | .90 [22.9] | 1.15 [29.2] | .18 [4.5] | 1.39 [35.3] | 1.61 [40.9] | 1.41 [35.8] | 5/16 |
| | CB650-12-3Y | 600 - 1000 | 650 | 1/2 | 4.84 [122.9] | 0.59 [15.0] | 2.00 [50.8] | 1.12 [28.4] | 1.07 [27.2] | .25 [6.4] | 1.97 [50.0] | 2.32 [58.9] | 1.85 [47.0] | 3/8 |

* HEX STYLE & SIZE MAY DIFFER FROM CHART. DIFFERENCE IN SIZE WILL NOT AFFECT FIT, FORM, OR FUNCTION OF PART



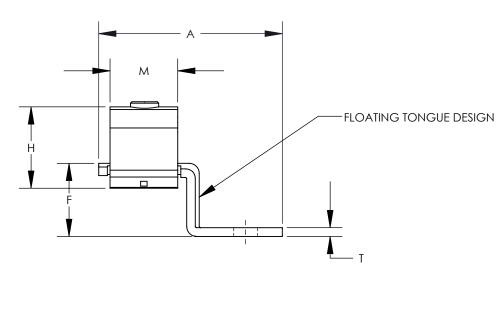


| | | | | | | | ITEM R |
|-----|-------|------|------|-----|--|-----------------|--------|
| | | | | | | | DATAS |
| | | | | | | | - |
| | | | | | | | DIM |
| 09 | 11/13 | ЈНИЦ | JHNU | RGB | REMOVED L DIMENSION REVISED W DIMENSION FOR CB70-14-CY: .47 WAS .50 | N41663BA-C41663 | |
| 08 | 2/13 | JHNU | JHNU | RGB | REVISED TITLE BLOCK | N41663BA-C41663 | - |
| REV | DATE | BY | СНК | APR | DESCRIPTION | ECN | DRAWN |



- 1. MATERIAL: BODY - COPPER SCREW - STEEL, ZINC PLATED
- 2. CULUS LISTEDFOR USE UP TO 600V & TEMPERATURE RATED 90 °C
- 3. RATED FOR USE WITH COPPER STRANDED CODE CONDUCTOR ONLY
- 4. THESE PARTS ARE ROHS COMPLIANT
- 5. SEE PACKAGING LABEL FOR TIGHTENING TORQUE INFORMATION
- 6. PKG QTY: C = 100 Q = 25 3 = 3



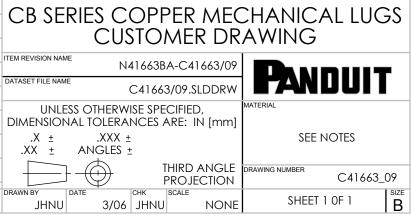

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit: CB225-56-QY