



4-Port 240W Multi-Gig Power-over-Ethernet Midspan IEEE802.3bt Compliant Power Injector



Features

- IEEE802.3bt Compliant
- Compliant with Phihong Proprietary 12.5K Detection
- Diagnostic LEDs
- 1 Year Warranty
- 2.5 Gigabit Compatible
- Shielded DC Jacks
- OCP, OVP and Short Circuit Protections
- Limited Power Source
- Broken Wire Detection
- Optional SNMP Management

Applications

- Satellite Receiver
- Wireless Network Access Points
- LCD Displays
- Security Cameras
- Kiosks
- Computer Workstations

Safety Approvals

- UL/cUL 60950-1
- UL/cUL 62368-1
- CE
- IEC60950-1
- IEC62368-1

Mechanical Characteristics (Standard Model)

- Length: 224mm (8.82in)
- Width: 200mm (7.87in)
- Height: 48.5mm (1.91in)
- Weight: 1.59Kg (3.5lbs)

Output Specifications

Model	# of Ports	Data Speed	DC Output Voltage	Load		Regulation		SNMP
				Min.	Max.	Line	Load	
POE240U-4BT-R	4	2.5G	56V	10mA	1.07A	53-57V		No
POE240U-4BT-N-R	4	2.5G	56V	10mA	1.07A	53-57V		Yes

INPUT:**AC Input Voltage Range**

90 to 264VAC

AC Input Frequency

47 to 63Hz

AC Input Current

5.0A (RMS) maximum for 90VAC

2.5A (RMS) maximum for 230VAC

Leakage Current

3.5mA maximum @ 264VAC 50Hz

AC Inrush Current

40A (RMS) maximum for 115VAC

80A (RMS) maximum for 230VAC

OUTPUT:**Total Output Power**

240W

Ripple and Regulation²

200mV max @25°C, 100-240VAC

Efficiency³

75% (typical) at Max. load, 120VAC 60Hz

Hold-up Time

10mS min. 120VAC 60Hz max load

ENVIRONMENTAL:**Temperature**

Operation 0°C to +40°C

Non-operation -20°C to +65°C

Humidity 5 to 90%

EMC

Complies with FCC Class B

Complies with EN55032 Class B

Immunity

ESD: IEC61000-4-2 Level 3

RS: IEC61000-4-3 Level 2

EFT: IEC61000-4-4 Level 2

Surge: IEC61000-4-3 Level 3

CS: IEC61000-4-3 Level 2

Voltage Dips IEC61000-4-11

Harmonic: IEC61000-3-2 Class A

Insulation Resistance

Primary to Secondary: >10M OHM, 500VDC

Primary to Earth Ground: >10M OHM, 500VDC

FEATURES:**Over Current Protection**

Output #1(OUT) <650mA

Output #2(OUT) <650mA

Output #1 and #2 combined(OUT) <1300mA

For 12.5K, Output #1 & #2(OUT) <1300mA

Over Voltage Protection

120V for <0.2 seconds

Short Circuit Protection

The output can be shorted permanently without damage

LED Indicators

Solid Green – detection/connection valid & output “ON”

Blink Red – Fault Condition (over current or shorted)

Blink Red & Green – Detection is invalid

Input Connector

IEC320 inlet 3 pin

Output Connection


Female RJ45

Data input: Bottom Row Port

Power/Data Output: Top Row Port

Notes:

1. The specifications defined are at ambient temperature of 25°C, unless otherwise specified.
2. Measured within 2 inches of RJ45 with by-pass capacitors 0.1uF/10uF at output connector terminal & oscilloscope set at 20MHz (tested by oscilloscope).
3. Efficiency is measured after 30 minutes burn-in.

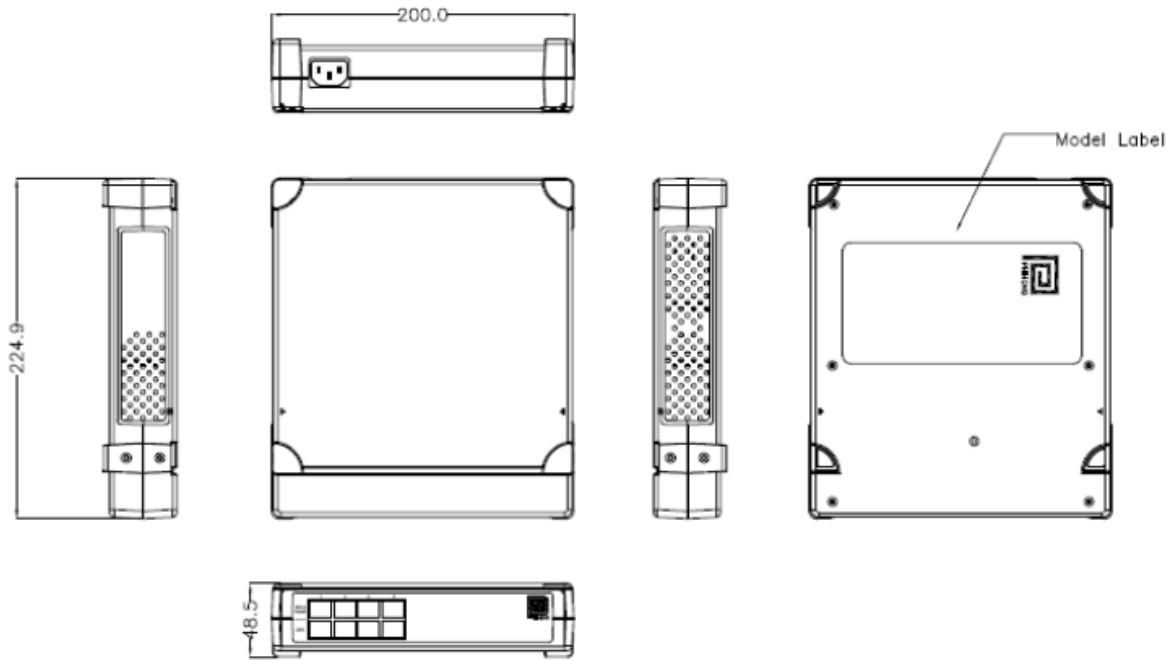



Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

This device complies with/The devices in this product series comply with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phihong:

[POE240U-4BT-N-R](#) [POE240U-4BT-R](#)