

## Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.75 mm<sup>2</sup>, number of positions: 8, pitch: 2.54 mm, connection method: Crimp connection, color: black



The figure shows a 10-position version of the product

### Your advantages

- ✓ Cost-effective connection of crimped conductors in large quantities
- ✓ Gold-plated contacts ensure transfer quality remains stable over the long term
- ✓ Small component size for applications where space is at a premium
- ✓ Tools for manual and automatic crimping available as an option



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 100 pc                                                                                                  |
| GTIN         | <br>4 055626 487984 |
| GTIN         | 4055626487984                                                                                           |

### Technical data

#### Item properties

|                           |                          |
|---------------------------|--------------------------|
| Brief article description | PCB connector            |
| Plug-in system            | MICRO COMBICON - FMC 0,5 |
| Type of contact           | Female connector         |
| Range of articles         | MCC 0,5/...-ST           |
| Pitch                     | 2.54 mm                  |
| Number of positions       | 8                        |
| Connection method         | Crimp connection         |
| Number of levels          | 1                        |
| Number of connections     | 8                        |
| Number of potentials      | 8                        |

#### Electrical parameters

# Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

## Technical data

### Electrical parameters

|                             |        |
|-----------------------------|--------|
| Nominal current             | 6 A    |
| Nom. voltage                | 160 V  |
| Rated voltage               | 160 V  |
| Rated voltage (III/2)       | 160 V  |
| Rated voltage (II/2)        | 320 V  |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2)  | 2.5 kV |

### Connection capacity

|                                     |                                                                                                    |
|-------------------------------------|----------------------------------------------------------------------------------------------------|
| Connection method                   | Crimp connection                                                                                   |
| Conductor cross section flexible    | 0.14 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> (Maximum external diameter of the insulation 1.9 mm) |
| Conductor cross section AWG / kcmil | 26 ... 18 (Maximum external diameter of the insulation 1.9 mm)                                     |
| Stripping length                    | 4.1 mm ... 4.5 mm                                                                                  |

### Material data - housing

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Housing color                                                     | black (9005) |
| Insulating material                                               | PA           |
| Insulating material group                                         | I            |
| CTI according to IEC 60112                                        | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |

### Dimensions for the product

|                             |          |
|-----------------------------|----------|
| Length [ l ]                | 16 mm    |
| Width [ w ]                 | 20.82 mm |
| Height [ h ]                | 3.95 mm  |
| Pitch                       | 2.54 mm  |
| Height (without solder pin) | 3.95 mm  |

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 100                 |
| Denomination packing units | Pcs.                |

### Ambient conditions

|                                         |                                                     |
|-----------------------------------------|-----------------------------------------------------|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |

### Termination and connection method

# Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

## Technical data

### Mechanical tests according to standard

|                                     |                        |
|-------------------------------------|------------------------|
| Test specification                  | IEC 61984              |
| Visual inspection                   | IEC 60512-1-1:2002-02  |
| Dimension check                     | IEC 60512-1-2:2002-02  |
| Resistance of inscriptions          | IEC 60068-2-70:1995-12 |
| Insertion and withdrawal force      | IEC 60512-13-2:2006-02 |
| No. of cycles                       | 100                    |
| Insertion strength per pos. approx. | 2 N                    |
| Withdraw strength per pos. approx.  | 3 N                    |
| Polarization and coding             | IEC 60512-13-5:2006-02 |
| Contact holder in insert            | IEC 60512-15-1:2008-05 |
| Test force per pos.                 | 20 N                   |

### Air clearances and creepage distances

|                                                 |                     |
|-------------------------------------------------|---------------------|
| Clearances and creepage distances               | IEC 60664-1:2007-04 |
| Specification                                   | IEC 60664-1:2007-04 |
| Minimum clearance - inhomogeneous field (III/3) | 1.5 mm              |
| Minimum clearance - inhomogeneous field (III/2) | 1.5 mm              |
| Minimum clearance - inhomogeneous field (II/2)  | 1.5 mm              |
| Minimum creepage distance value (III/3)         | 2 mm                |
| Minimum creepage distance value (III/2)         | 0.8 mm              |
| Minimum creepage distance value (II/2)          | 1.6 mm              |

### Current carrying capacity / derating curves

|                  |                                                               |
|------------------|---------------------------------------------------------------|
| Caption          | Type: MCC 0,5/...-ST-2,54 with MC 0,5/...-G-2,54 P20 THR R... |
| Specification    | IEC 61984:2008-10                                             |
| Reduction factor | 0.8                                                           |
| Note             | Representation based on IEC 60512-5-2:2002-02                 |
|                  | For number of positions, see diagram                          |

### Mechanical tests (A)

|                                              |             |
|----------------------------------------------|-------------|
| Test specification                           | IEC 61984   |
| Insertion strength per pos. approx.          | 2 N         |
| Withdraw strength per pos. approx.           | 3 N         |
| Polarization when inserted requirement >20 N | Test passed |
| Contact holder in insert requirements >20 N  | Test passed |

### Durability tests (B)

|                                        |                       |
|----------------------------------------|-----------------------|
| Specification                          | IEC 60512-9-1:2010-03 |
| Contact resistance R <sub>1</sub>      | 2.1 mΩ                |
| Insertion/withdrawal cycles            | 100                   |
| Contact resistance R <sub>2</sub>      | 2.1 mΩ                |
| Impulse withstand voltage at sea level | 2.95 kV               |
| Power-frequency withstand voltage      | 1.39 kV               |

## Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

### Technical data

#### Durability tests (B)

|                                              |         |
|----------------------------------------------|---------|
| Insulation resistance, neighboring positions | > 12 TΩ |
|----------------------------------------------|---------|

#### Thermal tests (C)

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Specification                                   | IEC 60512-5-1:2002-02 |
| Number of positions                             | 16                    |
| Conductor cross section                         | 0.75 mm <sup>2</sup>  |
| Test current                                    | 6 A                   |
| Upper limiting temperature requirements <100 °C | Test passed           |

#### Climatic tests (D)

|                                        |                                                                           |
|----------------------------------------|---------------------------------------------------------------------------|
| Specification                          | DIN 50018:2013-05                                                         |
| Cold stress                            | -55 °C/2 h                                                                |
| Thermal stress                         | 105 °C/168 h                                                              |
| Corrosive stress                       | 1.0 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Impulse withstand voltage at sea level | 2.95 kV                                                                   |
| Power-frequency withstand voltage      | 1.39 kV                                                                   |

#### Environmental and durability tests (E)

|                                       |                                            |
|---------------------------------------|--------------------------------------------|
| Specification                         | IEC 61984:2008-10                          |
| Result, degree of protection, IP code | Back of hand safety with IP10 access probe |


#### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings

## Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

Diagram

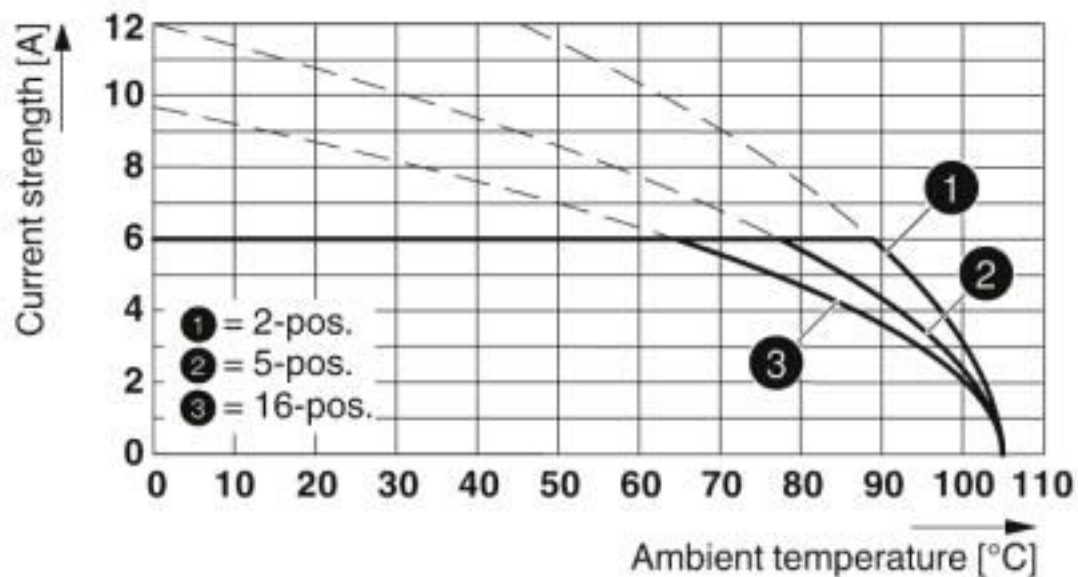

Type: MCC 0,5/...-ST-2,54 with MC 0,5/...-G-2,54 P20 THR R...

### Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440309 |
| eCl@ss 4.0    | 27260700 |
| eCl@ss 4.1    | 27260700 |
| eCl@ss 5.0    | 27260700 |
| eCl@ss 5.1    | 27260700 |
| eCl@ss 6.0    | 27260700 |
| eCl@ss 7.0    | 27440309 |
| eCl@ss 8.0    | 27440309 |
| eCl@ss 9.0    | 27440309 |

ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC002638 |
| ETIM 6.0 | EC002638 |
| ETIM 7.0 | EC002638 |

### Approvals

Approvals

Approvals

cULus Recognized / EAC / IECCEB Scheme / VDE Gutachten mit Fertigungsüberwachung

# Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

## Approvals

Ex Approvals

### Approval details

|                                                                                                                                                                                                                                                                          |       |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| cULus Recognized  <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E60425-20110128 |       |       |
|                                                                                                                                                                                                                                                                          | B     | D     |
| Nominal voltage UN                                                                                                                                                                                                                                                       | 150 V | 150 V |
| Nominal current IN                                                                                                                                                                                                                                                       | 6 A   | 6 A   |
| mm²/AWG/kcmil                                                                                                                                                                                                                                                            | 26-18 | 26-18 |

|                                                                                       |         |
|---------------------------------------------------------------------------------------|---------|
| EAC  | B.01687 |
|---------------------------------------------------------------------------------------|---------|

|                                                                                                                                                                         |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| IECEE CB Scheme  <a href="http://www.iecee.org/">http://www.iecee.org/</a> DE1-63595 |          |
|                                                                                                                                                                         |          |
| Nominal voltage UN                                                                                                                                                      | 160 V    |
| Nominal current IN                                                                                                                                                      | 6 A      |
| mm²/AWG/kcmil                                                                                                                                                           | 0.14-.75 |

|                                                                                                                                                                                                                                                                                                                                                   |          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung  <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> 40042258 |          |
|                                                                                                                                                                                                                                                                                                                                                   |          |
| Nominal voltage UN                                                                                                                                                                                                                                                                                                                                | 160 V    |
| Nominal current IN                                                                                                                                                                                                                                                                                                                                | 6 A      |
| mm²/AWG/kcmil                                                                                                                                                                                                                                                                                                                                     | 0.14-.75 |

## Accessories

Accessories

Crimp contact

## Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

### Accessories

#### Accessories - MCC 0,5-MP AU 0,14-0,5 - 1013425



Crimp contact, type of contact: Female connector, connection method: Crimp connection, contact surface: Gold, Conductor cross section flexible: 0.14 ...0.5 mm<sup>2</sup>

---

#### Accessories - MCC 0,5-MP AU 0,14-0,5 R - 1013420



Crimp contact, type of contact: Female connector, connection method: Crimp connection, contact surface: Gold, Conductor cross section flexible: 0.14 ...0.5 mm<sup>2</sup>

---

#### Accessories - MCC 0,5-MP AU 0,34-0,75 - 1013419



Crimp contact, type of contact: Female connector, connection method: Crimp connection, contact surface: Gold, Conductor cross section flexible: 0.34 ...0.75 mm<sup>2</sup>

---

#### Accessories - MCC 0,5-MP AU 0,34-0,75 R - 1013418



Crimp contact, type of contact: Female connector, connection method: Crimp connection, contact surface: Gold, Conductor cross section flexible: 0.34 ...0.75 mm<sup>2</sup>

---

### Crimping tool

#### Crimping pliers - CRIMPFOX-P CC 0.75 L - 1064998



Crimping pliers, for COMBICON crimp connectors with cross section: 0.14 ... 0.75 mm<sup>2</sup>. Unlockable pressure lock, precise parallel crimping, front entry, B crimp, incl. 2 positioning aids

---

### Additional products

## Printed-circuit board connector - MCC 0,5/ 8-ST-2,54 - 1012272

### Accessories

Printed-circuit board connector - MC 0,5/ 8-G-2,54 P20 THR R44 - 1821300

PCB headers, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 8, pitch: 2.54 mm, color: black, contact surface: Gold, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2 mm, Sample values available under SAMPLE MC...



Printed-circuit board connector - MCV 0,5/ 8-G-2,54 P20 THR R44 - 1821452

PCB headers, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 8, pitch: 2.54 mm, color: black, contact surface: Gold, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2 mm, Sample values available under SAMPLE MC...



Printed-circuit board connector - MC 0,5/ 8-G-2,54 SMD R44 - 1821753

PCB headers, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 8, pitch: 2.54 mm, color: black, contact surface: Gold, mounting: SMD soldering, pin layout: Linear pad geometry, Sample values available under SAMPLE MC...



Printed-circuit board connector - MCV 0,5/ 8-G-2,54 SMD R44 - 1821601

PCB headers, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 8, pitch: 2.54 mm, color: black, contact surface: Gold, mounting: SMD soldering, pin layout: Linear pad geometry, Sample values available under SAMPLE MC...





# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1012272](#)