


## PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB connector, nominal current: 8 A, rated voltage (III/2): 160 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 13, pitch: 3.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin



The figure shows a 10-pos. version with 20 contacts

### Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Optimized for tight installation situations: operation and conductor connection from one direction
- ✓ Automatic locking and intuitive release through Lock and Release operating lever in contrasting color



### Key Commercial Data

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| Packing unit           | 50 pc                                                                                |
| Minimum order quantity | 50 pc                                                                                |
| GTIN                   |  |
| GTIN                   | 4055626514468                                                                        |

### Technical data

#### Item properties

|                           |                           |
|---------------------------|---------------------------|
| Brief article description | PCB connector             |
| Plug-in system            | MINI COMBICON - DFMC 1,5  |
| Type of contact           | Female connector          |
| Range of articles         | DFMC 1,5/...-ST-LR        |
| Pitch                     | 3.5 mm                    |
| Number of positions       | 13                        |
| Connection method         | Push-in spring connection |
| Number of levels          | 2                         |
| Number of connections     | 26                        |

# PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

## Technical data

### Item properties

|                      |    |
|----------------------|----|
| Number of potentials | 26 |
|----------------------|----|

### Electrical parameters

|                             |        |
|-----------------------------|--------|
| Nominal current             | 8 A    |
| Nom. voltage                | 160 V  |
| Rated voltage               | 160 V  |
| Rated voltage (III/2)       | 160 V  |
| Rated voltage (II/2)        | 320 V  |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2)  | 2.5 kV |

### Connection capacity

|                                                                       |                                               |
|-----------------------------------------------------------------------|-----------------------------------------------|
| Connection method                                                     | Push-in spring connection                     |
| pluggable                                                             | Yes                                           |
| Conductor cross section solid                                         | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| Conductor cross section flexible                                      | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| Conductor cross section AWG / kcmil                                   | 24 ... 16                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.14 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> |
| Stripping length                                                      | 10 mm                                         |

### Specifications for ferrules

|                                                              |                                                              |
|--------------------------------------------------------------|--------------------------------------------------------------|
| Recommended crimping pliers                                  | 1212034 CRIMPFOX 6                                           |
| Ferrules without insulating collar, according to DIN 46228-1 | Cross section: 0.25 mm <sup>2</sup> ; Length: 7 mm           |
|                                                              | Cross section: 0.34 mm <sup>2</sup> ; Length: 7 mm           |
|                                                              | Cross section: 0.5 mm <sup>2</sup> ; Length: 8 mm ... 10 mm  |
|                                                              | Cross section: 0.75 mm <sup>2</sup> ; Length: 8 mm ... 10 mm |
|                                                              | Cross section: 1 mm <sup>2</sup> ; Length: 8 mm ... 10 mm    |
|                                                              | Cross section: 1.5 mm <sup>2</sup> ; Length: 10 mm           |
| Recommended crimping pliers                                  | 1212034 CRIMPFOX 6                                           |
| Ferrules with insulating collar, according to DIN 46228-4    | Cross section: 0.14 mm <sup>2</sup> ; Length: 8 mm           |
|                                                              | Cross section: 0.25 mm <sup>2</sup> ; Length: 8 mm ... 10 mm |
|                                                              | Cross section: 0.34 mm <sup>2</sup> ; Length: 8 mm ... 10 mm |
|                                                              | Cross section: 0.5 mm <sup>2</sup> ; Length: 8 mm ... 10 mm  |
|                                                              | Cross section: 0.75 mm <sup>2</sup> ; Length: 10 mm          |

### Flange specifications

|                 |                              |
|-----------------|------------------------------|
| Type of locking | Snap-in locking              |
| Mounting flange | Lock & Release ejector lever |

### Material data - contact

|      |                                                                                   |
|------|-----------------------------------------------------------------------------------|
| Note | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
|------|-----------------------------------------------------------------------------------|

# PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

## Technical data

### Material data - contact

|                                          |                    |
|------------------------------------------|--------------------|
| Contact material                         | Cu alloy           |
| Surface characteristics                  | hot-dip tin-plated |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn)  |
| Metal surface contact area (top layer)   | Tin (4 - 8 µm Sn)  |

### Material data - housing

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Housing color                                                     | black (9005) |
| Insulating material                                               | PA           |
| Insulating material group                                         | I            |
| CTI according to IEC 60112                                        | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |

### Material data – actuating element

|                                        |     |
|----------------------------------------|-----|
| Insulating material                    | PBT |
| CTI according to IEC 60112             | 600 |
| Flammability rating according to UL 94 | V0  |

### Dimensions for the product

|                             |          |
|-----------------------------|----------|
| Length [ l ]                | 27.79 mm |
| Width [ w ]                 | 52.4 mm  |
| Height [ h ]                | 13.25 mm |
| Pitch                       | 3.5 mm   |
| Height (without solder pin) | 13.25 mm |

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 50                  |
| Denomination packing units | Pcs.                |

### Ambient conditions

|                                         |                                                     |
|-----------------------------------------|-----------------------------------------------------|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |

### Termination and connection method

|                                          |                                                                                                                                               |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Conductor connection test                | The stripped-off ends of the largest conductor can be completely inserted in the opening of the terminal point without using excessive force. |
| Test result                              | Test passed                                                                                                                                   |
| Test – repeated connection and release   | IEC 60999-1:1999-11                                                                                                                           |
|                                          | Test passed                                                                                                                                   |
| Test for conductor damage and slackening | IEC 60999-1:1999-11                                                                                                                           |

# PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

## Technical data

### Termination and connection method

|  |             |
|--|-------------|
|  | Test passed |
|--|-------------|

### Pull-out test

|                                                          |                                         |
|----------------------------------------------------------|-----------------------------------------|
| Pull-out test                                            | IEC 60999-1:1999-11                     |
|                                                          | Test passed                             |
| Conductor cross section / conductor type / tensile force | 0.2 mm <sup>2</sup> / solid / > 10 N    |
|                                                          | 0.2 mm <sup>2</sup> / flexible / > 10 N |
|                                                          | 1.5 mm <sup>2</sup> / solid / > 40 N    |
|                                                          | 1.5 mm <sup>2</sup> / flexible / > 40 N |

### Mechanical tests according to standard

|                                     |                        |
|-------------------------------------|------------------------|
| Test specification                  | IEC 61984              |
| Visual inspection                   | IEC 60512-1-1:2002-02  |
| Dimension check                     | IEC 60512-1-2:2002-02  |
| Resistance of inscriptions          | IEC 60068-2-70:1995-12 |
| Insertion and withdrawal force      | IEC 60512-13-2:2006-02 |
| No. of cycles                       | 25                     |
| Insertion strength per pos. approx. | 3 N                    |
| Withdraw strength per pos. approx.  | 2 N                    |
| Polarization and coding             | IEC 60512-13-5:2006-02 |
| Contact holder in insert            | IEC 60512-15-1:2008-05 |
| Test force per pos.                 | 30 N                   |

### Air clearances and creepage distances

|                                                 |                     |
|-------------------------------------------------|---------------------|
| Clearances and creepage distances               | IEC 60664-1:2007-04 |
| Specification                                   | IEC 60664-1:2007-04 |
| Minimum clearance - inhomogeneous field (III/3) | 1.5 mm              |
| Minimum clearance - inhomogeneous field (III/2) | 1.5 mm              |
| Minimum clearance - inhomogeneous field (II/2)  | 1.5 mm              |
| Minimum creepage distance value (III/3)         | 2 mm                |
| Minimum creepage distance value (III/2)         | 0.8 mm              |
| Minimum creepage distance value (II/2)          | 1.6 mm              |

### Electrical tests - Function

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
|---------------|---------------------|

### Temperature cycles

|                                      |                     |
|--------------------------------------|---------------------|
| Specification                        | IEC 60999-1:1999-11 |
| Test current (minimum cross section) | 4 A DC              |
| Test current (maximum cross section) | 8 A DC              |
| Temperature cycles                   | 192                 |

### Current carrying capacity / derating curves

|         |                                                                  |
|---------|------------------------------------------------------------------|
| Caption | Type: DFMC 1,5/...-ST-3,5-LR with DMC 1,5/...-G1F-3,5-LR P20 THR |
|---------|------------------------------------------------------------------|

# PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

## Technical data

### Current carrying capacity / derating curves

|                  |                                               |
|------------------|-----------------------------------------------|
| Specification    | IEC 61984:2008-10                             |
| Reduction factor | 0.8                                           |
| Note             | Representation based on IEC 60512-5-2:2002-02 |
|                  | For number of positions, see diagram          |

### Mechanical tests (A)

|                                              |             |
|----------------------------------------------|-------------|
| Test specification                           | IEC 61984   |
| Insertion strength per pos. approx.          | 3 N         |
| Withdraw strength per pos. approx.           | 2 N         |
| Polarization when inserted requirement >20 N | Test passed |
| Contact holder in insert requirements >20 N  | Test passed |

### Durability tests (B)

|                                              |                       |
|----------------------------------------------|-----------------------|
| Specification                                | IEC 60512-9-1:2010-03 |
| Contact resistance $R_1$                     | 2.1 mΩ                |
| Insertion/withdrawal cycles                  | 25                    |
| Contact resistance $R_2$                     | 2.4 mΩ                |
| Impulse withstand voltage at sea level       | 2.95 kV               |
| Power-frequency withstand voltage            | 1.39 kV               |
| Insulation resistance, neighboring positions | 12 TΩ                 |

### Thermal tests (C)

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Specification                                   | IEC 60512-5-1:2002-02 |
| Number of positions                             | 20                    |
| Conductor cross section                         | 1.5 mm <sup>2</sup>   |
| Test current                                    | 8 A                   |
| Upper limiting temperature requirements <100 °C | Test passed           |

### Climatic tests (D)

|                                        |                                                                           |
|----------------------------------------|---------------------------------------------------------------------------|
| Specification                          | ISO 6988:1985-02                                                          |
| Cold stress                            | -40 °C/2 h                                                                |
| Thermal stress                         | 100 °C/168 h                                                              |
| Corrosive stress                       | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Impulse withstand voltage at sea level | 2.95 kV                                                                   |
| Power-frequency withstand voltage      | 1.39 kV                                                                   |

### Environmental and durability tests (E)

|                                       |                                     |
|---------------------------------------|-------------------------------------|
| Specification                         | IEC 61984:2008-10                   |
| Result, degree of protection, IP code | Finger safety with IP20 test finger |


### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811


### Drawings

Diagram

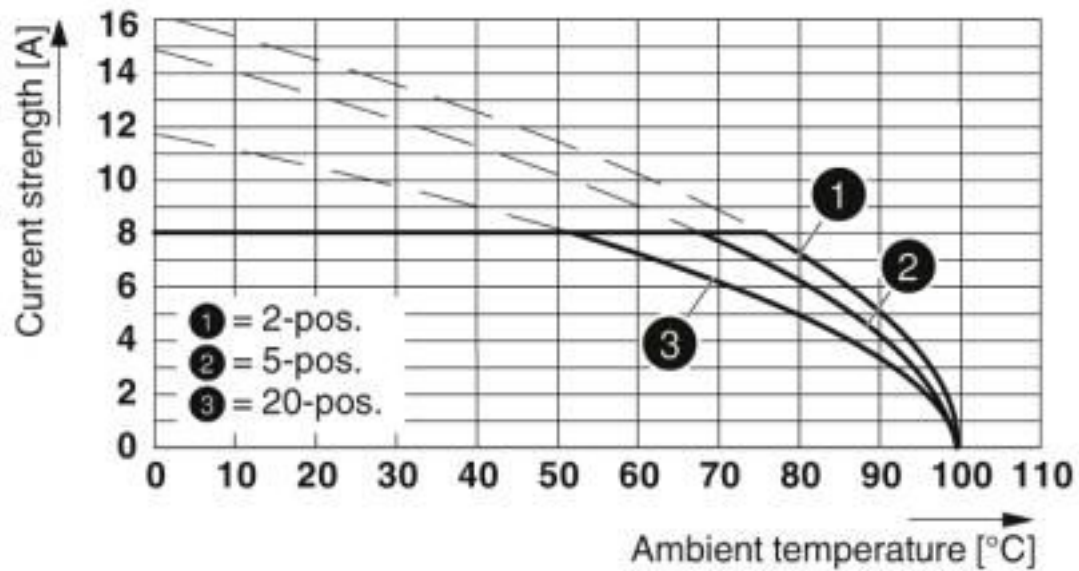

Type: DFMC 1,5/...-ST-3,5-LR with DMC 1,5/...-G1F-3,5-LR P20 THR


Diagram

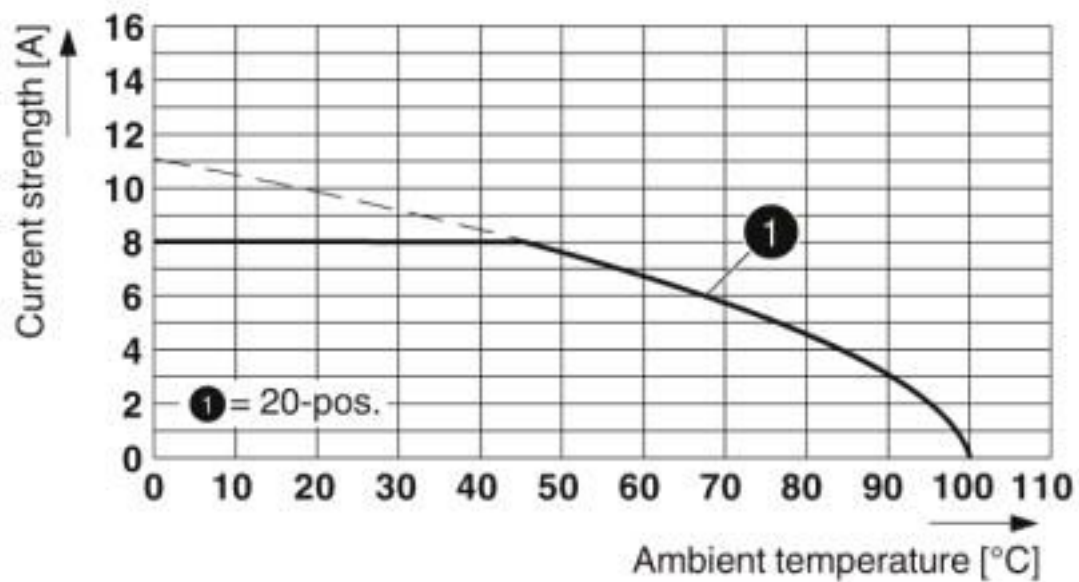

Type: DFMC 1,5/...-ST-3,5-LRBKBDMC-21 with DMC 1,5/...-G1-3,5-LR P26THR


## PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

Diagram

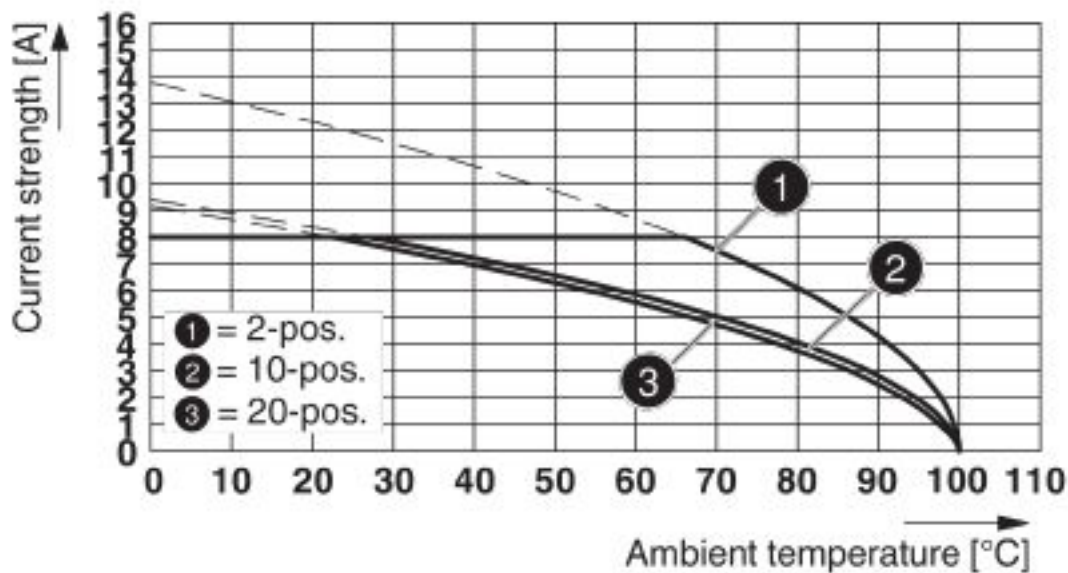

Type: DFMC 1,5/...-ST-3,5-LR with DMC 1,5/...-G1F-3,5-LR P35

Diagram

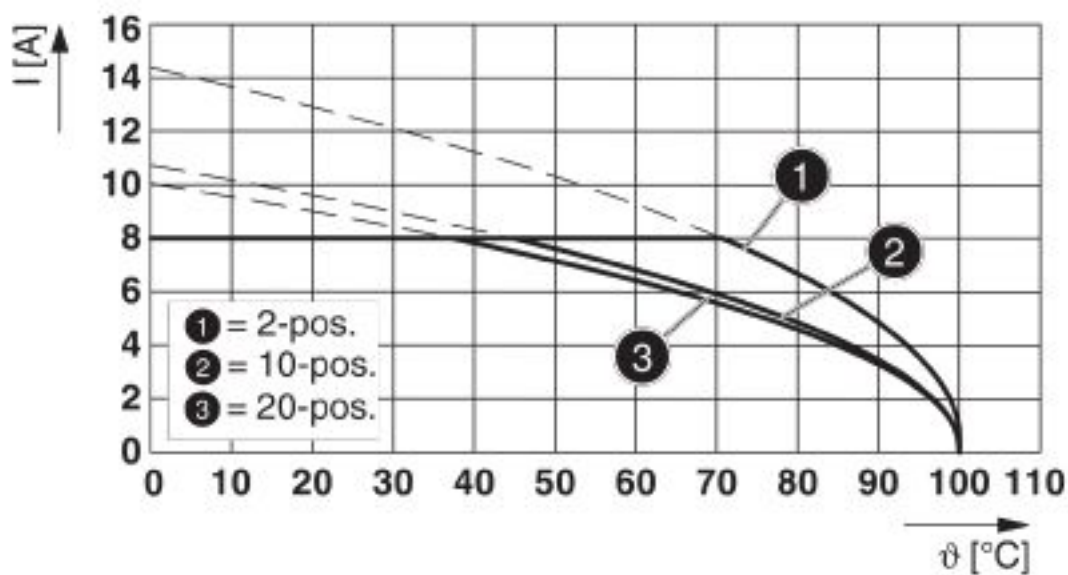

Type: DFMC 1,5/...-ST-3,5-LR with DMCV 1,5/...-G1F-3,5-LR P35

### Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440309 |
| eCl@ss 4.0    | 27260700 |

# PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.1 | 27260700 |
| eCl@ss 5.0 | 27260700 |
| eCl@ss 5.1 | 27260700 |
| eCl@ss 6.0 | 27260700 |
| eCl@ss 7.0 | 27440309 |
| eCl@ss 8.0 | 27440309 |
| eCl@ss 9.0 | 27440309 |

### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC002638 |
| ETIM 6.0 | EC002638 |
| ETIM 7.0 | EC002638 |

## Approvals

### Approvals

#### Approvals

IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                    |                                                                                     |                                                           |                 |
|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-60359_B1_B2 |
| Nominal voltage UN | 160 V                                                                               |                                                           |                 |
| Nominal current IN | 8 A                                                                                 |                                                           |                 |

|                                            |                                                                                     |                                                                                                                                                                                                                |          |
|--------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40038423 |
| Nominal voltage UN                         | 160 V                                                                               |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 8 A                                                                                 |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.2-1.5                                                                             |                                                                                                                                                                                                                |          |

## PCB connector - DFMC 1,5/13-ST-3,5-LR BK - 1021811

### Approvals

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01687 |
|-----|-----------------------------------------------------------------------------------|---------|

|                    |                                                                                   |                                                                                                                                                       |                 |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19920306 |
|                    | B                                                                                 | C                                                                                                                                                     | D               |
| Nominal voltage UN | 300 V                                                                             | 50 V                                                                                                                                                  | 300 V           |
| Nominal current IN | 8 A                                                                               | 8 A                                                                                                                                                   | 8 A             |
| mm²/AWG/kcmil      | 24-16                                                                             | 24-16                                                                                                                                                 | 24-16           |

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1021811](#)