

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(<http://phoenixcontact.com/download>)



Bus system flush-type socket, DeviceNet/CANopen, 5-pos., M12, shielded, A-coded, front/screw mounting, with M16 thread, can be positioned, with 5 m bus cable, 2 x 0.2 mm²; 2 x 0.32 mm²

Your advantages

- Pre-assembled with cables in various standard lengths for immediate use
- Customer-specific assemblies and cable lengths can be supplied
- Sealed on the cable side for optimum tightness of seal
- Cable designs for all common networks and fieldbuses
- For high transmission safety: shield connection to the housing with optional EMC nut



CANopen DeviceNet DeviceNet

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 022446 |
| GTIN | 4046356022446 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| | -40 °C ... 85 °C (without mechanical actuation) |
| Degree of protection | IP67 |

General

| | |
|------|--|
| Note | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
|------|--|

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Technical data

General

| | |
|-----------------------------|--|
| Rated current at 40°C | 4 A (Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed) |
| Rated voltage | 48 V AC |
| | 60 V DC |
| Rated surge voltage | 1.5 kV |
| Number of positions | 5 |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Standards/regulations | M12 connector IEC 61076-2-101 |
| Signal type/category | CANopen® |
| | DeviceNet™ |
| Status display | No |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Test voltage | 2500 V |
| Connection method | CAN Bus / DeviceNet |
| Insertion/withdrawal cycles | > 100 |
| Torque | 3 Nm ... 4 Nm (Installation-side) |
| Mounting type | Front mounting M16 x 1.5 With locking nut |

Material

| | |
|--|---------------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 6.6 |
| Material, knurls | Nickel-plated brass |
| Sealing material | NBR |

Standards and Regulations

| | |
|--|--|
| Standards/specifications | M12 connector IEC 61076-2-101 |
| Flammability rating according to UL 94 | V0 |
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. |
| | • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. |
| | • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Technical data

Standards and Regulations

| | |
|--|---|
| | <ul style="list-style-type: none">The products are suitable for applications in plant, controller, and electrical device engineering. |
| | <ul style="list-style-type: none">When operating the connectors in outdoor applications, they must be separately protected against environmental influences. |
| | <ul style="list-style-type: none">Assembled products may not be manipulated or improperly opened. |
| | <ul style="list-style-type: none">Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). |
| | <ul style="list-style-type: none">When using the product in direct connection with third-party manufacturers, the user is responsible. |
| | <ul style="list-style-type: none">For operating voltages > 50 V AC, conductive connector housings must be grounded |
| | <ul style="list-style-type: none">Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. |
| | <ul style="list-style-type: none">Observe the corresponding technical data. You will find information:<ul style="list-style-type: none">On the productOn the packing labelIn the supplied documentationOnline at phoenixcontact.com/products under the product |
| | <ul style="list-style-type: none">Only use tools recommended by Phoenix Contact |
| | <ul style="list-style-type: none">Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products |
| | <ul style="list-style-type: none">Ensure that the protective or functional ground has been properly connected. |
| | <ul style="list-style-type: none">VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector |
| | <ul style="list-style-type: none">The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12). |

Cable

| | |
|-------------------------------------|----------------------------------|
| Cable type | CANopen®/DeviceNet™, PUR, violet |
| Cable type (abbreviation) | 920 |
| UL AWM style | 21198 (80°C/300 V) |
| Signal type/category | CANopen® |
| | DeviceNet™ |
| Cable structure | 2xAWG24/19+2xAWG22/19 |
| Conductor cross section | 2x 0.25 mm² (Data cable) |
| | 2x 0.34 mm² (Power supply) |
| | 1x 0.34 mm² (Drain wire) |
| AWG signal line | 24 |
| AWG power supply | 22 |
| Conductor structure signal line | 19x 0.13 mm |
| Conductor structure, voltage supply | 19x 0.15 mm |

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Technical data

Cable

| | |
|---|--|
| Core diameter including insulation | 1.95 mm ± 0.05 mm (Data cable) |
| | 1.4 mm ± 0.05 mm (Power supply) |
| Wire colors | Red-black, blue-white |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Plastic-coated aluminum foil, aluminum side outside |
| Overall twist | 2 pairs around a drain wire in the center to the core |
| Shielding | Tinned copper braided shield |
| Optical shield covering | 80 % |
| External sheath, color | violet RAL 4001 |
| External cable diameter D | 6.7 mm ± 0.3 mm |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 10 x D |
| Number of bending cycles | 5000000 |
| Bending radius | 70 mm |
| Minimum bending radius, drag chain applications | 10 x D |
| Traversing path | 4.5 m |
| Traversing rate | 3 m/s |
| Acceleration | 3 m/s ² |
| Cable weight | 90 kg/km |
| Outer sheath, material | PUR |
| Material conductor insulation | Foamed PE (Data cable) |
| | PE (Power supply) |
| Conductor material | Tin-plated Cu litz wires |
| Insulation resistance | $\geq 5 \text{ G}\Omega \cdot \text{km}$ (Data cable) |
| | $\geq 5 \text{ G}\Omega \cdot \text{km}$ (Power supply) |
| Loop resistance | $\leq 181.80 \text{ }\Omega/\text{km}$ (Data cable) |
| | $\leq 114.80 \text{ }\Omega/\text{km}$ (Power supply) |
| Cable capacity | nom. 40 nF/km (Data cable) |
| Wave impedance | 120 $\Omega \pm 10\%$ (with 1 MHz) |
| Attenuation | $\leq 22.9 \text{ dB/km}$ (with 1 MHz) |
| | $\leq 16.4 \text{ dB/km}$ (At 500 kHz) |
| | $\leq 9.5 \text{ dB/km}$ (At 125 kHz) |
| Nominal voltage, cable | $\leq 300 \text{ V}$ (Peak value, not for high-power applications) |
| Test voltage Core/Core | 2000 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 2000 V (50 Hz, 1 min.) |
| Flame resistance | UL 1581, Sec. 1060 (FT-1) |
| | IEC 60332-1 |
| | in accordance with ISO 6722-1 5.22 (UN ECE-R 118.01) |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Technical data

Cable


| | |
|---|---|
| | according to IEC 60754-1 |
| Other resistance | Low adhesion |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -20 °C ... 80 °C (cable, flexible installation) |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |

Environmental Product Compliance

| | |
|---|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" | |

Drawings


Dimensional drawing

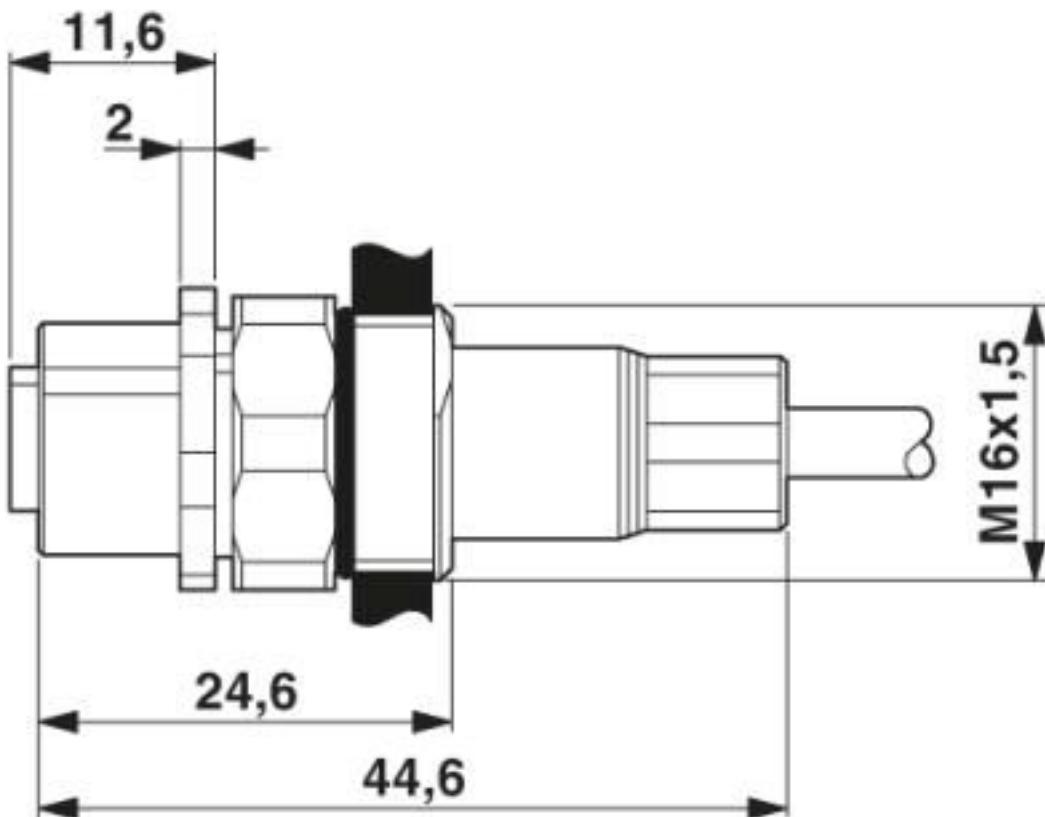

M12 flush-type socket, can be positioned


Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Dimensional drawing

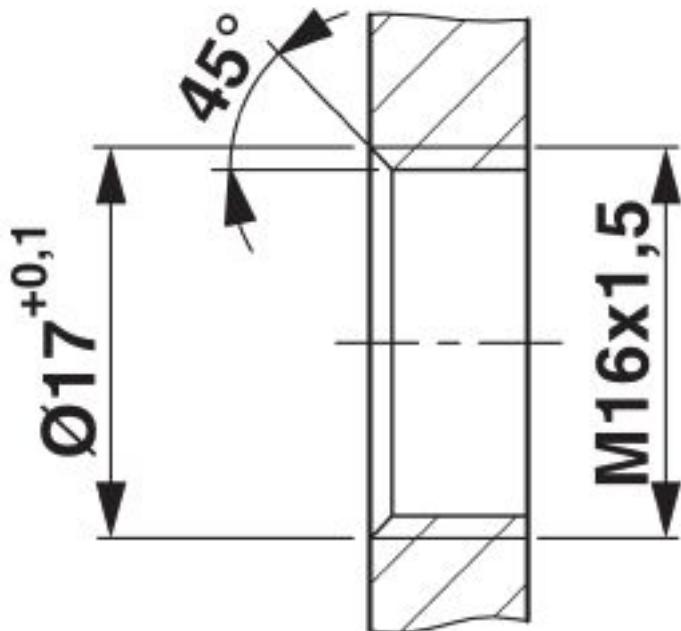

Housing cutout for M16 fastening thread, mounting panel with thread


Circuit diagram

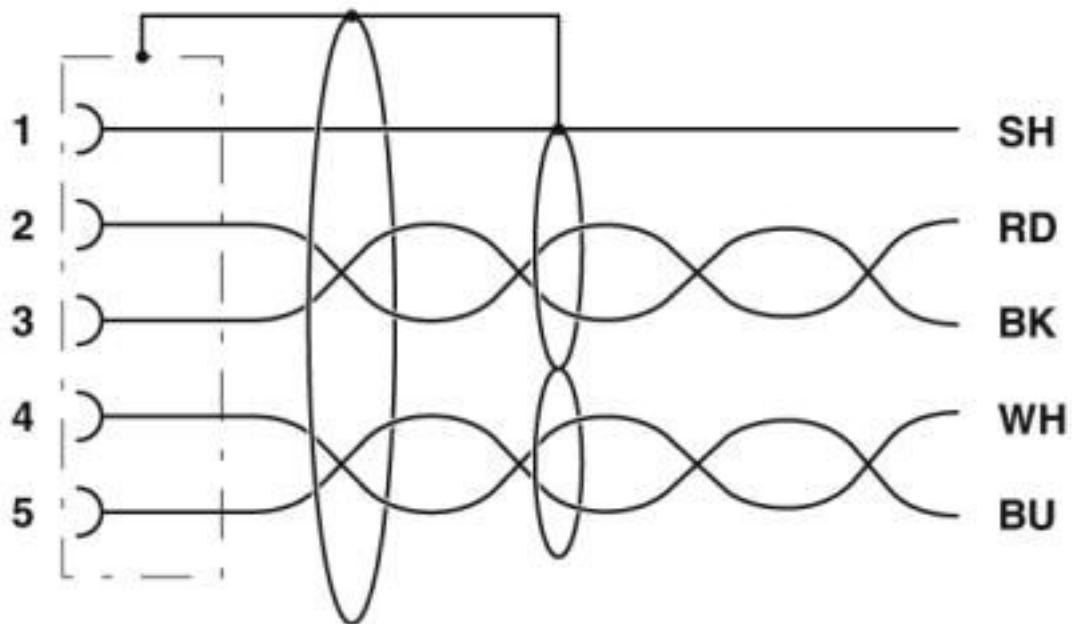

Contact assignment of the M12 socket

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Schematic diagram

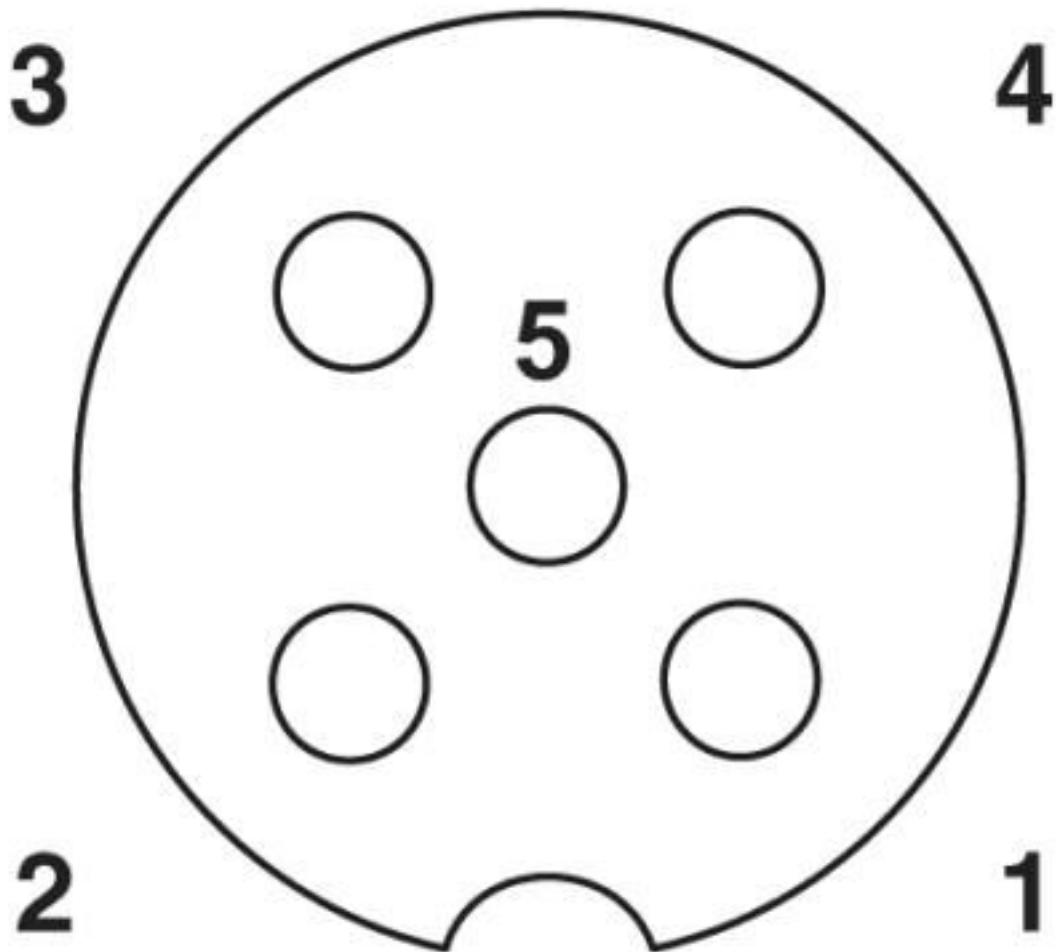

Pin assignment M12 socket, 5-pos., A-coded, socket side view

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Cable cross section



CANopen®/DeviceNet™, PUR, violet [920]

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27440102 |
| eCl@ss 4.0 | 27140800 |
| eCl@ss 4.1 | 27140800 |
| eCl@ss 5.0 | 27143400 |
| eCl@ss 5.1 | 27143400 |
| eCl@ss 6.0 | 27279200 |
| eCl@ss 7.0 | 27440103 |
| eCl@ss 8.0 | 27440103 |
| eCl@ss 9.0 | 27440102 |

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001297 |
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC000830 |
| ETIM 5.0 | EC002061 |
| ETIM 6.0 | EC002061 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 39121413 |
| UNSPSC 18.0 | 39121413 |
| UNSPSC 19.0 | 39121413 |
| UNSPSC 20.0 | 39121413 |
| UNSPSC 21.0 | 39121413 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC



B.01687

Accessories

Accessories

EMC nut

Bus system flush-type socket - SACCEC-M12FS-5CON-M16/ 5,0-920 - 1525704

Accessories

EMV nut - SACC-PG9-KD-NUT-SH - 1440177



Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1525704](#)