

Cable set - PTF 0,3/ 2-WB-8-HPC0140PL250 - 1713267

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled PCB connectors

Your advantages

- ✓ Tool-free fast connection for flexible PCBs
- ✓ Small component size for applications where space is at a premium
- ✓ Reliable contacting of flexible PCBs, thanks to fixing pin
- ✓ Designed and tested according to IEC 60838-2-2



Key Commercial Data

Packing unit	10 pc
Minimum order quantity	500 pc
GTIN	 4 055626 312385
GTIN	4055626312385

Technical data

Item properties

Brief article description	Cable set
Plug-in system	COMBICON COMPACT PTF
Type of contact	Female connector
Range of articles	PTF 0,3/...-WB-H
Pitch	1.8 mm
Number of positions	2
Connection method	Crimp connection
Mounting type	Direct plug-in method
Number of levels	1
Number of connections	2
Number of potentials	2

Cable set - PTF 0,3/ 2-WB-8-HPC0140PL250 - 1713267

Technical data

Electrical parameters

Nom. voltage	< 25 V
Rated voltage	25 V

Dimensions for the product

Pitch	1.90 mm
-------	---------

Header 1

Insulating material	PBT
CTI according to IEC 60112	275

Packaging information

Pieces per package	10
Denomination packing units	Pcs.

Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (operation)	-30 °C ... 100 °C (dependent on the derating curve)

Air clearances and creepage distances

Clearances and creepage distances	IEC 60838-1:2004-10 + AMD 1:2008-07 + AMD 2:2011-03
Specification	IEC 60838-1:2004-10 + AMD 1:2008-07 + AMD 2:2011-03

Temperature-rise test

Specification	IEC 60838-1:2004-10 + AMD 1:2008-07 + AMD 2:2011-03
Result	Test passed
Requirement temperature-rise test	Increase in temperature ≤ 45 K

Vibration test

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 500 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2 h

Glow-wire test

Specification	IEC 60695-2-11:2000-10
Result	Test passed
Temperature	650 °C
Time of exposure	30 s

Needle flame test

Specification	IEC 60695-11-5:2004-12
Result	Test passed
Time of exposure	10 s

Cable set - PTF 0,3/ 2-WB-8-HPC0140PL250 - 1713267


Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Diagram

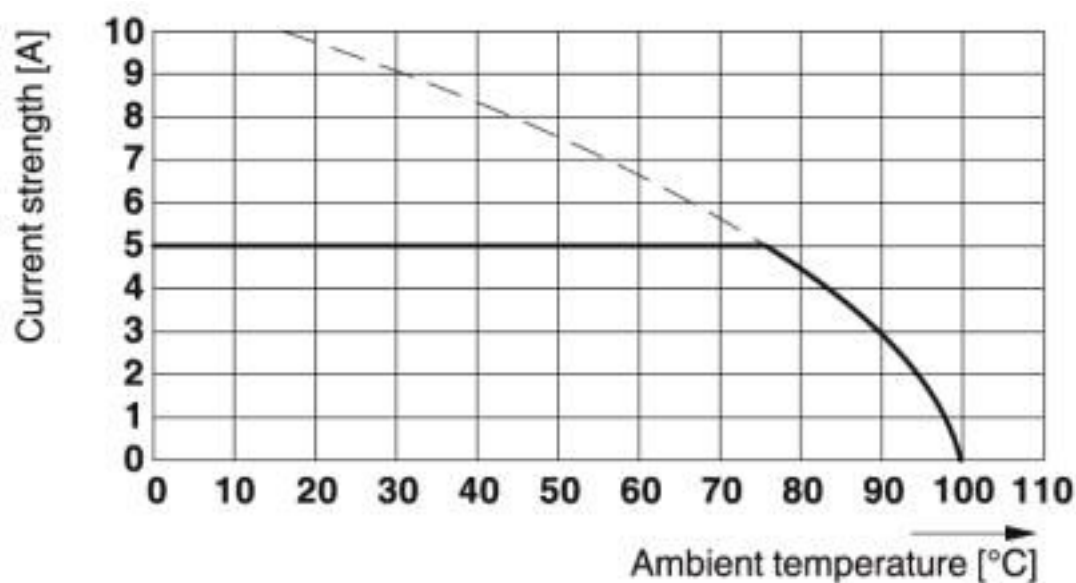

Type: PTF 0,3/ 2-WB-8-H

Classifications

eCl@ss

eCl@ss 10.0.1	27440309
eCl@ss 8.0	27440309
eCl@ss 9.0	27440309

ETIM

ETIM 5.0	EC002638
ETIM 6.0	EC002638
ETIM 7.0	EC002638

Approvals

Approvals

Approvals

UL Recognized / EAC

Cable set - PTF 0,3/ 2-WB-8-HPC0140PL250 - 1713267

Approvals

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E118976-20130430
Nominal voltage UN	60 V	
Nominal current IN	5 A	
mm²/AWG/kcmil	22	

EAC		B.01687
-----	--	---------

Accessories

Additional products

Printed-circuit board connector - PTF 0,3/ 4-BB-8-H - 1707559



PCB connector, rated voltage (III/2): 25 V, nominal cross section: 0.34 mm², pitch: 1.9 mm, number of positions: 4, mounting: Direct plug-in method, color: white. For flexible PCBs with a width of 8 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561



Assembled PCB connectors

PCB - PTF 0,3/ 4-FLEX-I-8 - 1848477



PCB direct plug, number of positions: 4, pitch: 1.8 mm, color: white

Cable set - PTF 0,3/ 2-WB-8-HPC0140PL250 - 1713267

Accessories

PCB - PTF 0,3/ 4-FLEX-L-8 - 1848480



PCB direct plug, nominal cross section: 0.34 mm², number of positions: 4, pitch: 1.8 mm, color: white, mounting: Direct plug-in method

PCB - PTF 0,3/ 4-FLEX-T-8 - 1848493



PCB direct plug, number of positions: 4, pitch: 1.8 mm, color: white

Printed-circuit board connector - PTSM 0,5/ 2-P-2,5 - 1778832



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm², number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin

Printed-circuit board connector - PTSM 0,5/ 2-P-2,5 WH - 1704853



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm², number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

Printed-circuit board connector - PTSM 0,5/ 2-PI-2,5 BK - 1709435



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm², number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin

Cable set - PTF 0,3/ 2-WB-8-HPC0140PL250 - 1713267

Accessories

Printed-circuit board connector - PTSM 0,5/ 2-PI-2,5 WH - 1709450



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm², number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

Printed-circuit board connector - PTSM 0,5/ 2-PL-2,5 WH - 1709457



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm², number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1713267