

## Surge protection device - LIT 4X1-24 - 2804649

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection in one-piece 6.2 mm wide DIN rail module for four conductors with common reference potential.

### Your advantages

- ✓ Can be used in binary, analog, and intrinsically safe circuits
- ✓ Protection of up to four signal wires over a design width of 6.2 mm



### Key Commercial Data

|              |                                                                                      |
|--------------|--------------------------------------------------------------------------------------|
| Packing unit | 10 pc                                                                                |
| GTIN         |  |
| GTIN         | 4046356428286                                                                        |

### Technical data

#### Dimensions

|        |                                  |
|--------|----------------------------------|
| Height | 93.1 mm                          |
| Width  | 6.2 mm                           |
| Depth  | 102.5 mm (incl. DIN rail 7.5 mm) |

#### Ambient conditions

|                                         |                                        |
|-----------------------------------------|----------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 80 °C                       |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C                       |
| Altitude                                | ≤ 2000 m (amsl (above mean sea level)) |
| Degree of protection                    | IP20                                   |

#### General

|                                        |                          |
|----------------------------------------|--------------------------|
| Housing material                       | PBT                      |
| Flammability rating according to UL 94 | V-0                      |
| Color                                  | anthracite grey RAL 7016 |
| Mounting type                          | DIN rail: 35 mm          |

# Surge protection device - LIT 4X1-24 - 2804649

## Technical data

### General

|                     |                            |
|---------------------|----------------------------|
| Type                | DIN rail module, one-piece |
| Direction of action | Line-Earth Ground          |

### Protective circuit

|                                                                      |                                       |
|----------------------------------------------------------------------|---------------------------------------|
| IEC test classification                                              | C1                                    |
|                                                                      | C2                                    |
|                                                                      | C3                                    |
|                                                                      | D1                                    |
| Nominal voltage $U_N$                                                | 24 V DC                               |
| Maximum continuous voltage $U_C$                                     | 36 V DC                               |
|                                                                      | 25 V AC                               |
| Rated current                                                        | 350 mA (40 °C)                        |
| Operating effective current $I_C$ at $U_C$                           | $\leq 2 \mu A$                        |
| Residual current $I_{PE}$                                            | $\leq 8 \mu A$                        |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-earth)          | 5 kA                                  |
| Pulse discharge current $I_{imp}$ (10/350) $\mu s$ (line-earth)      | 500 A                                 |
|                                                                      | 2 kA (in total)                       |
| Total discharge current $I_{total}$ (8/20) $\mu s$                   | 20 kA                                 |
| Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (line-earth) | 10 kA                                 |
|                                                                      | 20 kA (in total)                      |
| Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (line-earth)        | 50 A                                  |
|                                                                      | 200 A (in total)                      |
| Output voltage limitation at 1 kV/ $\mu s$ (line-earth) spike        | $\leq 60 V$                           |
| Residual voltage at $I_n$ (line-earth)                               | $\leq 50 V$                           |
| Residual voltage with $I_{an}$ (10/1000) $\mu s$ (line-earth)        | $\leq 60 V$                           |
| Voltage protection level $U_p$ (line-earth)                          | $\leq 60 V$ (C1 - 500 V / 250 A)      |
|                                                                      | $\leq 95 V$ (C2 - 10 kV / 5 kA)       |
|                                                                      | $\leq 55 V$ (C3 - 10 A)               |
|                                                                      | $\leq 55 V$ (C3 - 50 A)               |
|                                                                      | $\leq 250 V$ (D1 - 500 A)             |
| Response time $t_A$ (line-earth)                                     | $\leq 1 ns$                           |
| Input attenuation aE, asym.                                          | typ. 0.3 dB (1 MHz / 50 $\Omega$ )    |
|                                                                      | typ. 0.2 dB (350 kHz / 150 $\Omega$ ) |
| Cut-off frequency $f_g$ (3 dB), asym. (PE) in 50 Ohm system          | typ. 6 MHz                            |
| Cut-off frequency $f_g$ (3 dB), asym. (PE) in 150 Ohm system         | typ. 2 MHz                            |
| Capacity                                                             | $\leq 1.3 nF$ (per channel)           |
| Resistance per path                                                  | 3.3 $\Omega \pm 20 \%$                |
| Surge protection fault message                                       | none                                  |
| Max. required back-up fuse                                           | 315 mA (T)                            |
| Impulse durability (line-earth)                                      | C1 - 500 V / 250 A                    |
|                                                                      | C2 - 10 kV / 5 kA                     |

## Surge protection device - LIT 4X1-24 - 2804649

### Technical data

#### Protective circuit

|                                                    |            |
|----------------------------------------------------|------------|
|                                                    | C3 - 50 A  |
|                                                    | D1 - 500 A |
| Alternating current carrying capacity (line-earth) | 5 A - 1 s  |

#### Connection data

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Screw connection                            |
| Screw thread                     | M3                                          |
| Tightening torque                | 0.8 Nm                                      |
| Stripping length                 | 8 mm                                        |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 14                                   |

#### Connection, equipotential bonding

|                   |               |
|-------------------|---------------|
| Connection method | DIN rail NS35 |
|-------------------|---------------|

#### Standards and Regulations

|                          |                                      |
|--------------------------|--------------------------------------|
| Standards/specifications | IEC 61643-21 A2:2012                 |
|                          | EN 61643-21 2001 + A1:2009 + A2:2013 |


#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


### Drawings

## Surge protection device - LIT 4X1-24 - 2804649

Application drawing

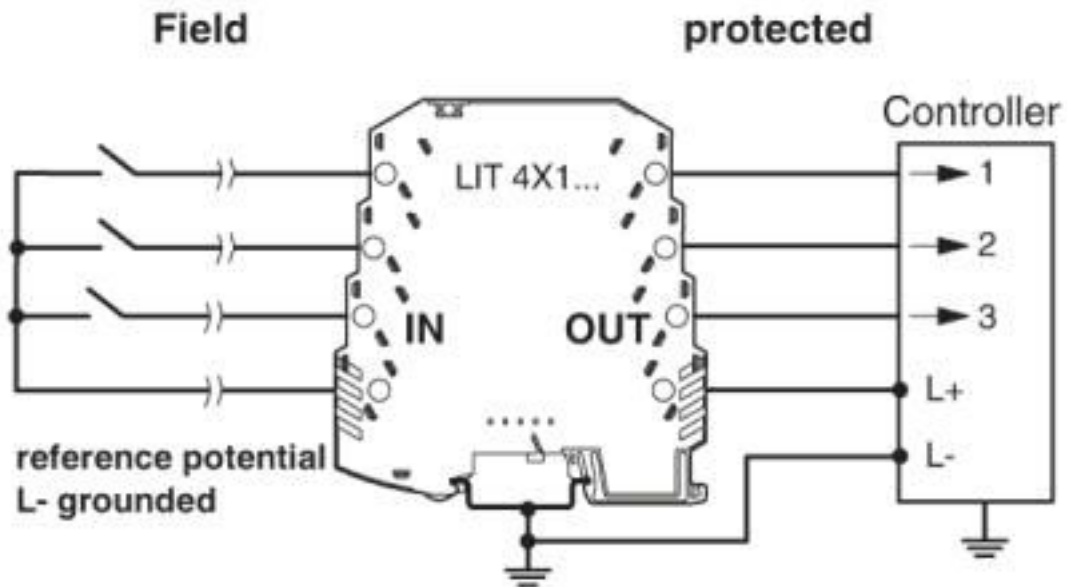


Diagram

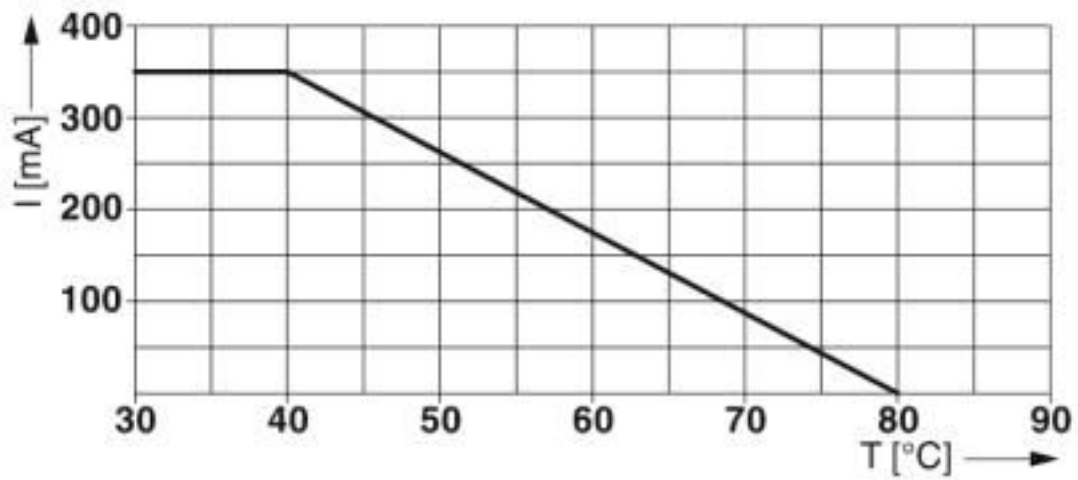


## Surge protection device - LIT 4X1-24 - 2804649

Dimensional drawing

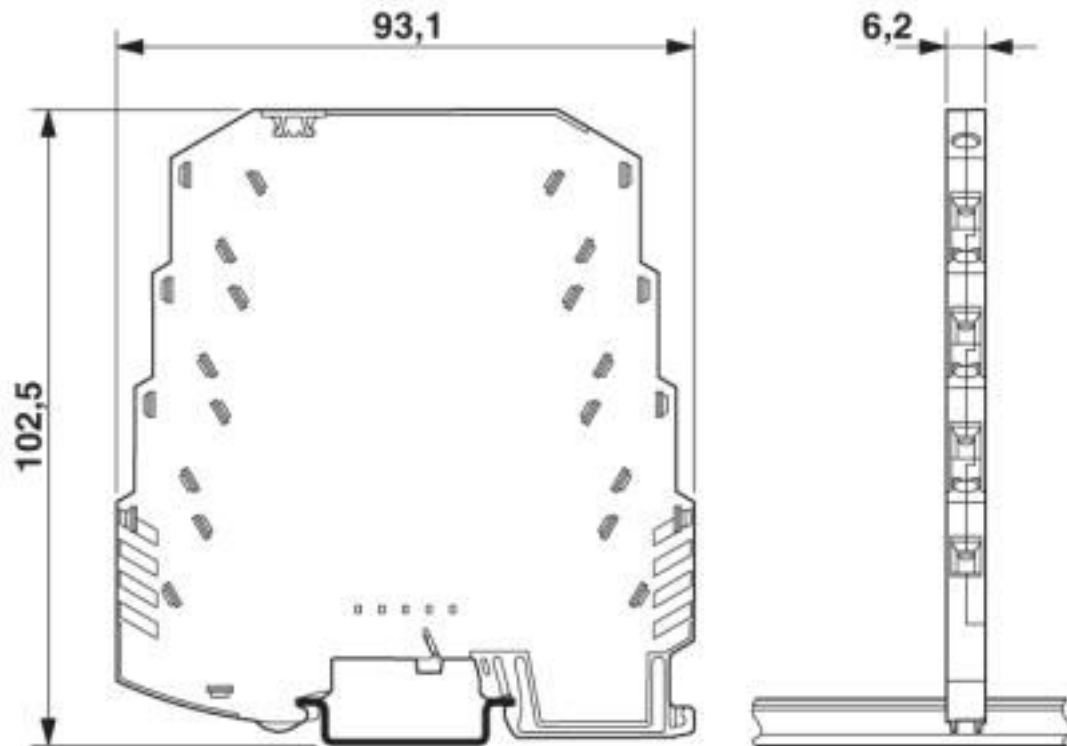


Pictogram

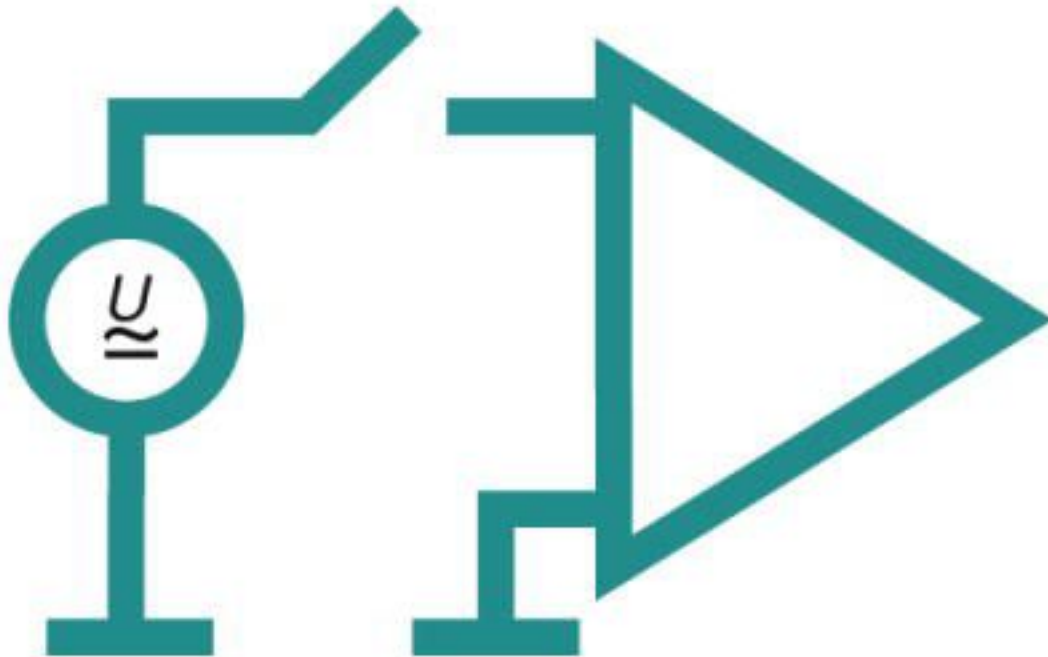

## Surge protection device - LIT 4X1-24 - 2804649

Circuit diagram

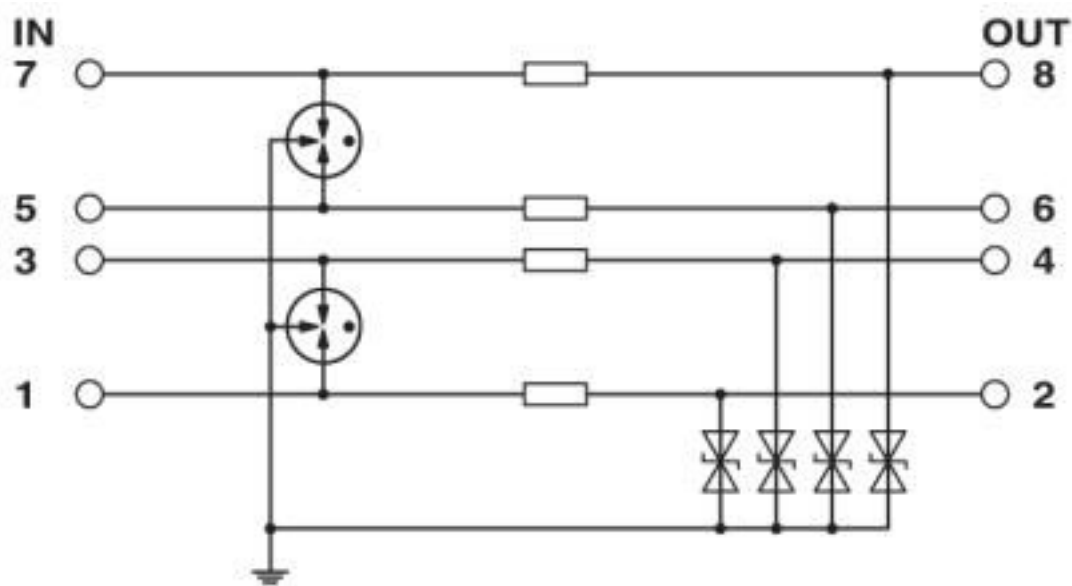

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27130807 |
| eCl@ss 4.0    | 27130800 |
| eCl@ss 4.1    | 27130800 |
| eCl@ss 5.0    | 27130800 |
| eCl@ss 5.1    | 27130800 |
| eCl@ss 6.0    | 27130800 |
| eCl@ss 7.0    | 27130807 |
| eCl@ss 8.0    | 27130807 |
| eCl@ss 9.0    | 27130807 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000943 |
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |
| ETIM 6.0 | EC000943 |
| ETIM 7.0 | EC000943 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11     | 39121610 |
| UNSPSC 12.01  | 39121610 |

## Surge protection device - LIT 4X1-24 - 2804649

### Classifications

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 39121620 |
| UNSPSC 18.0 | 39121620 |
| UNSPSC 19.0 | 39121620 |
| UNSPSC 20.0 | 39121620 |
| UNSPSC 21.0 | 39121620 |

### Approvals

#### Approvals

#### Approvals

DNV GL / UL Listed / EAC / EAC

#### Ex Approvals

#### Approval details

|        |                                                                                     |                                                                                   |            |
|--------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|
| DNV GL |  | <a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a> | TAE00001N8 |
|--------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|

|           |                                                                                     |                                                                                                                                                       |               |
|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 138168 |
|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|

|     |                                                                                     |               |
|-----|-------------------------------------------------------------------------------------|---------------|
| EAC |  | EAC-Zulassung |
|-----|-------------------------------------------------------------------------------------|---------------|

|     |                                                                                     |                         |
|-----|-------------------------------------------------------------------------------------|-------------------------|
| EAC |  | RU C-<br>DE.*09.B.00169 |
|-----|-------------------------------------------------------------------------------------|-------------------------|

### Accessories

#### Accessories

#### Terminal marking

## Surge protection device - LIT 4X1-24 - 2804649

### Accessories

#### Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

#### Marker for terminal blocks - UC-TM 6 OG - 0818328



Marker for terminal blocks, Sheet, orange, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

#### Marker for terminal blocks - UC-TM 6 YE - 0818331



Marker for terminal blocks, Sheet, yellow, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

#### Marker for terminal blocks - UC-TM 6 BU - 0818344



Marker for terminal blocks, Sheet, blue, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

#### Marker for terminal blocks - UC-TM 6 RD - 0818357



Marker for terminal blocks, Sheet, red, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80



## Surge protection device - LIT 4X1-24 - 2804649

### Accessories

Marker for terminal blocks - UC-TM 6 GN - 0818360



Marker for terminal blocks, Sheet, green, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2804649](#)