

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Installation ground terminal block, Push-in connection, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

### Your advantages

- ✓ Double function shafts on all levels
- ✓ The terminal blocks with knife disconnect zone in the upper level meet the safety requirement regarding individual circuit isolation of DIN VDE 0100-718

**RoHS**

COMPLETE RoHS

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 50 pc                                                                                                   |
| GTIN         | <br>4 046356 609562 |
| GTIN         | 4046356609562                                                                                           |

### Technical data

#### General

|                                                 |                                                                  |
|-------------------------------------------------|------------------------------------------------------------------|
| Number of levels                                | 3                                                                |
| Number of connections                           | 5                                                                |
| Potentials                                      | 2                                                                |
| Nominal cross section                           | 4 mm <sup>2</sup>                                                |
| Color                                           | gray                                                             |
| Insulating material                             | PA                                                               |
| Flammability rating according to UL 94          | V0                                                               |
| Rated surge voltage                             | 4 kV                                                             |
|                                                 | 6 kV                                                             |
| Degree of pollution                             | 3                                                                |
| Overvoltage category                            | III                                                              |
| Insulating material group                       | I                                                                |
| Maximum power dissipation for nominal condition | 0.77 W (the value is multiplied when connecting multiple levels) |

# Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

## Technical data

### General

|                                                                                           |                                                                                 |
|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Maximum load current                                                                      | 30 A (with 4 mm <sup>2</sup> conductor cross section and 3-pos. terminal block) |
| Nominal current I <sub>N</sub>                                                            | 24 A (with 4 mm <sup>2</sup> conductor cross section)                           |
| Nominal voltage U <sub>N</sub>                                                            | 400 V (phase conductor/phase conductor)                                         |
|                                                                                           | 250 V (phase conductor/PE)                                                      |
|                                                                                           | 250 V (phase conductor/N)                                                       |
| Maximum load current                                                                      | 16 A (with a 2.5 mm <sup>2</sup> conductor cross section)                       |
| Nominal current I <sub>N</sub>                                                            | 16 A                                                                            |
| Nominal voltage U <sub>N</sub>                                                            | 250 V                                                                           |
| Open side panel                                                                           | Yes                                                                             |
| Ambient temperature (operation)                                                           | -60 °C ... 85 °C                                                                |
| Ambient temperature (storage/transport)                                                   | -25 °C ... 55 °C (For a short time, not exceeding 24 h, -60 to +70 °C)          |
| Permissible humidity (storage/transport)                                                  | 30 % ... 70 %                                                                   |
| Ambient temperature (assembly)                                                            | -5 °C ... 70 °C                                                                 |
| Shock protection test specification                                                       | DIN EN 50274 (VDE 0660-514):2002-11                                             |
| Back of the hand protection                                                               | guaranteed                                                                      |
| Finger protection                                                                         | guaranteed                                                                      |
| Result of surge voltage test                                                              | Test passed                                                                     |
| Result of power-frequency withstand voltage test                                          | Test passed                                                                     |
| Power frequency withstand voltage setpoint                                                | 1.89 kV                                                                         |
| Result of the test for mechanical stability of terminal points (5 x conductor connection) | Test passed                                                                     |
| Result of bending test                                                                    | Test passed                                                                     |
| Bending test rotation speed                                                               | 10 rpm                                                                          |
| Bending test turns                                                                        | 135                                                                             |
| Bending test conductor cross section/weight                                               | 0.14 mm <sup>2</sup> / 0.2 kg                                                   |
|                                                                                           | 4 mm <sup>2</sup> / 0.9 kg                                                      |
| Tensile test result                                                                       | Test passed                                                                     |
| Result of tight fit on support                                                            | Test passed                                                                     |
| Tight fit on carrier                                                                      | NS 35                                                                           |
| Setpoint                                                                                  | 1 N                                                                             |
| Result of voltage-drop test                                                               | Test passed                                                                     |
| Result of temperature-rise test                                                           | Test passed                                                                     |
| Requirement temperature-rise test                                                         | Increase in temperature ≤ 45 K                                                  |
| Short circuit stability result                                                            | Test passed                                                                     |
| Conductor cross section short circuit testing                                             | 4 mm <sup>2</sup>                                                               |
| Short-time current                                                                        | 0.48 kA                                                                         |
| Conductor cross section short circuit testing                                             | 1.5 mm <sup>2</sup>                                                             |
| Short-time current                                                                        | 0.18 kA                                                                         |
| Result of thermal test                                                                    | Test passed                                                                     |
| Ageing test for screwless modular terminal block temperature cycles                       | 192                                                                             |
| Proof of thermal characteristics (needle flame) effective duration                        | 30 s                                                                            |

# Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

## Technical data

### General

|                                                                         |                                                     |
|-------------------------------------------------------------------------|-----------------------------------------------------|
| Result of aging test                                                    | Test passed                                         |
| Oscillation, broadband noise test result                                | Test passed                                         |
| Test specification, oscillation, broadband noise                        | DIN EN 50155 (VDE 0115-200):2008-03                 |
| Test spectrum                                                           | Service life test category 1, class B, body mounted |
| Test frequency                                                          | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$      |
| ASD level                                                               | 0.02 g <sup>2</sup> /Hz                             |
| Acceleration                                                            | 0,8 g                                               |
| Test duration per axis                                                  | 5 h                                                 |
| Test directions                                                         | X-, Y- and Z-axis                                   |
| Shock test result                                                       | Test passed                                         |
| Test specification, shock test                                          | DIN EN 50155 (VDE 0115-200):2008-03                 |
| Shock form                                                              | Half-sine                                           |
| Acceleration                                                            | 5g                                                  |
| Shock duration                                                          | 30 ms                                               |
| Number of shocks per direction                                          | 3                                                   |
| Test directions                                                         | X-, Y- and Z-axis (pos. and neg.)                   |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C                                              |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C                                              |
| Static insulating material application in cold                          | -60 °C                                              |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed                                              |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed                                              |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 27,5 MJ/kg                                          |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed                                              |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3                                         |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3                                         |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3                                         |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3                                         |

### Dimensions

|                  |         |
|------------------|---------|
| Width            | 5.2 mm  |
| End cover width  | 2.2 mm  |
| Length           | 101 mm  |
| Height NS 35/7,5 | 50.5 mm |
| Height NS 35/15  | 58 mm   |

### Connection data

|                                    |                                                                |
|------------------------------------|----------------------------------------------------------------|
| Note                               | Please observe the current carrying capacity of the DIN rails. |
| Connection method                  | Push-in connection                                             |
| Stripping length                   | 8 mm ... 10 mm                                                 |
| Conductor cross section solid min. | 0.14 mm <sup>2</sup>                                           |
| Conductor cross section solid max. | 4 mm <sup>2</sup>                                              |

# Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

## Technical data

### Connection data

|                                                                                                        |                                        |
|--------------------------------------------------------------------------------------------------------|----------------------------------------|
| Conductor cross section AWG min.                                                                       | 26                                     |
| Conductor cross section AWG max.                                                                       | 12                                     |
| Conductor cross section flexible min.                                                                  | 0.14 mm <sup>2</sup>                   |
| Conductor cross section flexible max.                                                                  | 4 mm <sup>2</sup>                      |
| Min. AWG conductor cross section, flexible                                                             | 26                                     |
| Max. AWG conductor cross section, flexible                                                             | 12                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve min.                             | 0.14 mm <sup>2</sup>                   |
| Conductor cross section flexible, with ferrule without plastic sleeve max.                             | 2.5 mm <sup>2</sup>                    |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                                | 0.14 mm <sup>2</sup>                   |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                                | 2.5 mm <sup>2</sup>                    |
| Two conductors with the same cross section, flexible, with TWIN ferrules, with plastic sleeve, maximum | 0.5 mm <sup>2</sup>                    |
| Connection cross sections directly pluggable                                                           | 0.34 mm <sup>2</sup> 4 mm <sup>2</sup> |
| Conductor cross section solid min.                                                                     | 0.34 mm <sup>2</sup>                   |
| Conductor cross section solid max.                                                                     | 4 mm <sup>2</sup>                      |
| Conductor cross section flexible, with ferrule without plastic sleeve min.                             | 0.34 mm <sup>2</sup>                   |
| Conductor cross section flexible, with ferrule without plastic sleeve max.                             | 2.5 mm <sup>2</sup>                    |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                                | 0.34 mm <sup>2</sup>                   |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                                | 2.5 mm <sup>2</sup>                    |
| Internal cylindrical gage                                                                              | A3                                     |
| Connection method                                                                                      | Push-in connection                     |
| Stripping length                                                                                       | 8 mm ... 10 mm                         |
| Conductor cross section solid min.                                                                     | 0.14 mm <sup>2</sup>                   |
| Conductor cross section solid max.                                                                     | 4 mm <sup>2</sup>                      |
| Conductor cross section AWG min.                                                                       | 26                                     |
| Conductor cross section AWG max.                                                                       | 12                                     |
| Conductor cross section flexible min.                                                                  | 0.14 mm <sup>2</sup>                   |
| Conductor cross section flexible max.                                                                  | 4 mm <sup>2</sup>                      |
| Min. AWG conductor cross section, flexible                                                             | 26                                     |
| Max. AWG conductor cross section, flexible                                                             | 12                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve min.                             | 0.14 mm <sup>2</sup>                   |
| Conductor cross section flexible, with ferrule without plastic sleeve max.                             | 2.5 mm <sup>2</sup>                    |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                                | 0.14 mm <sup>2</sup>                   |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                                | 2.5 mm <sup>2</sup>                    |
| Two conductors with the same cross section, flexible, with TWIN ferrules, with plastic sleeve, maximum | 0.5 mm <sup>2</sup>                    |

### Standards and Regulations

|                                        |     |
|----------------------------------------|-----|
| Connection in acc. with standard       | CUL |
| Flammability rating according to UL 94 | V0  |

### Environmental Product Compliance


# Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

## Technical data

### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

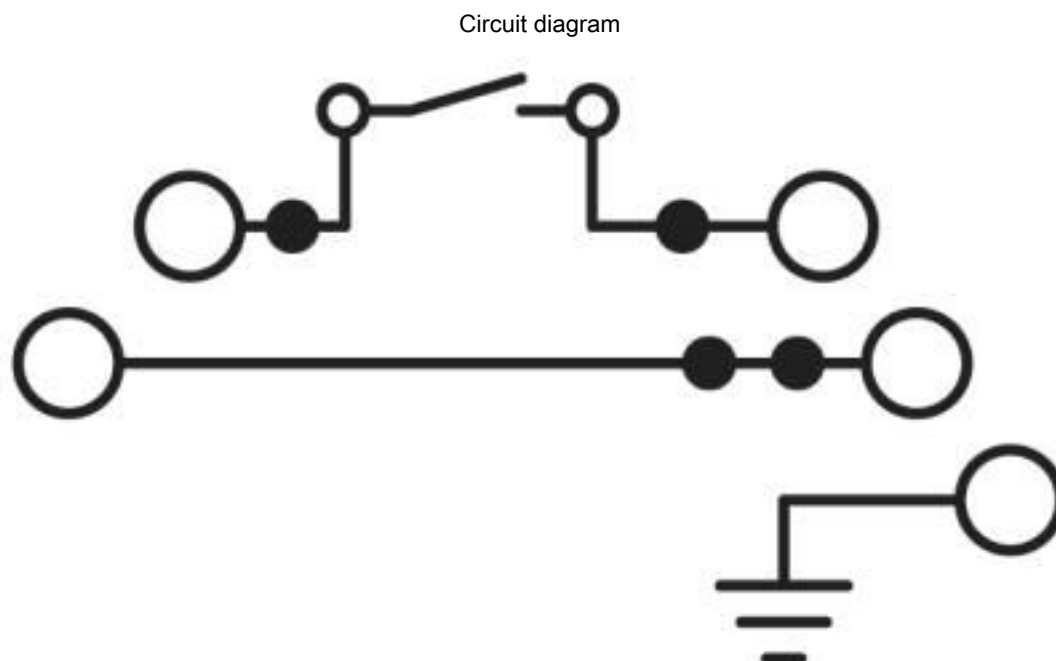

## Classifications

### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27141125 |
| eCl@ss 4.0    | 27141100 |
| eCl@ss 4.1    | 27141100 |
| eCl@ss 5.0    | 27141100 |
| eCl@ss 5.1    | 27141100 |
| eCl@ss 6.0    | 27141100 |
| eCl@ss 7.0    | 27141125 |
| eCl@ss 8.0    | 27141125 |
| eCl@ss 9.0    | 27141125 |

### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC000897 |
| ETIM 5.0 | EC001329 |
| ETIM 6.0 | EC001329 |
| ETIM 7.0 | EC001329 |

# Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

## Classifications

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39121410 |
| UNSPSC 18.0   | 39121410 |
| UNSPSC 19.0   | 39121410 |
| UNSPSC 20.0   | 39121410 |
| UNSPSC 21.0   | 39121410 |

## Approvals

### Approvals

#### Approvals

CSA / LR / EAC / EAC / UL Recognized / cUL Recognized / DNV GL / IEC CB Scheme / VDE Zeichengenehmigung / cULus Recognized

#### Ex Approvals

### Approval details

|                    |                                                                                     |                                                                                                                                         |       |
|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|
| CSA                |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
|                    | B                                                                                   | C                                                                                                                                       | D     |
| Nominal voltage UN | 300 V                                                                               | 150 V                                                                                                                                   | 300 V |
| Nominal current IN | 20 A                                                                                | 20 A                                                                                                                                    | 10 A  |
| mm²/AWG/kcmil      | 26-12                                                                               | 26-12                                                                                                                                   | 26-12 |

|    |                                                                                     |                                                         |             |
|----|-------------------------------------------------------------------------------------|---------------------------------------------------------|-------------|
| LR |  | <a href="http://www.lr.org/en">http://www.lr.org/en</a> | LR2002908TA |
|----|-------------------------------------------------------------------------------------|---------------------------------------------------------|-------------|

|     |                                                                                     |                          |
|-----|-------------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|-------------------------------------------------------------------------------------|--------------------------|

|     |                                                                                     |                          |
|-----|-------------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.BL08.B.00644 |
|-----|-------------------------------------------------------------------------------------|--------------------------|

# Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

## Approvals

|                    |                                                                                   |                                                                                                                                                       |              |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| UL Recognized      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
|                    | B                                                                                 | D                                                                                                                                                     |              |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                                 |              |
| Nominal current IN | 20 A                                                                              | 10 A                                                                                                                                                  |              |
| mm²/AWG/kcmil      | 26-12                                                                             | 26-12                                                                                                                                                 |              |

|                    |                                                                                   |                                                                                                                                                       |              |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| cUL Recognized     |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
|                    | B                                                                                 | D                                                                                                                                                     |              |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                                 |              |
| Nominal current IN | 20 A                                                                              | 10 A                                                                                                                                                  |              |
| mm²/AWG/kcmil      | 26-12                                                                             | 26-12                                                                                                                                                 |              |

|        |                                                                                     |                                                                                   |            |
|--------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|
| DNV GL |  | <a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a> | TAE00001BU |
|--------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|

|                 |                                                                                     |                                                           |           |
|-----------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------|
| IECEE CB Scheme |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-57041 |
|                 |                                                                                     |                                                           |           |
| mm²/AWG/kcmil   | 0.2-4                                                                               |                                                           |           |

|                        |                                                                                     |                                                                                                                                                                                                           |          |
|------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Zeichengenehmigung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40037480 |
|                        |                                                                                     |                                                                                                                                                                                                           |          |
| mm²/AWG/kcmil          | 0.2-4                                                                               |                                                                                                                                                                                                           |          |

|                  |                                                                                     |  |  |
|------------------|-------------------------------------------------------------------------------------|--|--|
| cULus Recognized |  |  |  |
|------------------|-------------------------------------------------------------------------------------|--|--|

## Accessories

Accessories

Bridge

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Wire bridge - FBSW 2-5/250MM - 3030172



Wire bridge, length: 250 mm, width: 5.1 mm, number of positions: 1, color: red/black

---

Wire bridge - FBSW 2-5/60MM - 3030170



Wire bridge, length: 60 mm, width: 5.1 mm, number of positions: 1, color: red/black

---

Wire bridge - FBSW 2-5/110MM - 3030171



Wire bridge, length: 110 mm, width: 5.1 mm, number of positions: 1, color: red/black

---

### Cover profile

Cover profile - AP-NLS N - 1013634



Cover profile, length: 300 mm, color: transparent

---

### DIN rail

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

---



## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM - 1204122



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Aluminum, uncoated, length: 2000 mm, color: silver

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM - 0801762



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored

End cap - NS 35/ 7,5 CAP - 1206560



DIN rail end piece, for DIN rail NS 35/7.5

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

---

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM - 1204135



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

---

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Aluminum, uncoated, length: 2000 mm, color: silver

---

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

---

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored

---

End cap - NS 35/15 CAP - 1206573



DIN rail end piece, for DIN rail NS 35/15

---

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM - 1201798



DIN rail, unperforated, Standard profile 2.3 mm, width: 35 mm, height: 15 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

---

### Documentation

Mounting material - PT-IL - 3208090



Operating decal for the push-in Technology

---

### End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

End clamp - E/NS 35 N - 0800886



End clamp, width: 9.5 mm, color: gray

---

End cover

End cover - D-PTI/3B - 3213976



End cover, length: 101 mm, width: 2.2 mm, height: 48.2 mm, color: gray

---

Filler plug

Filler plugs - CEC 2,5 - 3062757



Cover for conductor shaft, 10-pos., for spring cage terminal blocks (ST) and terminal blocks with push-in technology (PT) with a width of 5.2 mm

---

Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663



Insulating sleeve, color: white

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, color: red



---

Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, color: blue



---

Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, color: yellow



---

Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, color: green



---

Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, color: gray



## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, color: black



---

Insulating sleeve - ISH 2,5/0,2 - 3002843



Insulating sleeve, color: white

---

Insulating sleeve - ISH 2,5/0,5 - 3002856



Insulating sleeve, color: gray

---

Insulating sleeve - ISH 2,5/1,0 - 3002869



Insulating sleeve, color: black

---

### Jumper

Plug-in bridge - FBS 2-5 - 3030161



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 9 mm, number of positions: 2, color: red

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Plug-in bridge - FBS 3-5 - 3030174



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 14.2 mm, number of positions: 3, color: red

---

Plug-in bridge - FBS 4-5 - 3030187



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 19.4 mm, number of positions: 4, color: red

---

Plug-in bridge - FBS 5-5 - 3030190



Plug-in bridge, pitch: 5.2 mm, length: 23 mm, width: 24.6 mm, number of positions: 5, color: red

---

Plug-in bridge - FBS 10-5 - 3030213



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 50.6 mm, number of positions: 10, color: red

---

Plug-in bridge - FBS 20-5 - 3030226



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red

---



## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Plug-in bridge - FBS 50-5 - 3038930



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

---

Plug-in bridge - FBSR 2-5 - 3033702



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

---

Plug-in bridge - FBSR 3-5 - 3001591



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

---

Plug-in bridge - FBSR 4-5 - 3001592



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

---

Plug-in bridge - FBSR 5-5 - 3001593



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red

---

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Plug-in bridge - FBSR 10-5 - 3033710



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red

---

Plug-in bridge - FBS 2-5 BU - 3036877



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

---

Plug-in bridge - FBS 3-5 BU - 3036880



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

---

Plug-in bridge - FBS 4-5 BU - 3036893



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

---

Plug-in bridge - FBS 5-5 BU - 3036903



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

---

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Plug-in bridge - FBS 10-5 BU - 3036916



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

---

Plug-in bridge - FBS 20-5 BU - 3036929



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

---

Plug-in bridge - FBS 50-5 BU - 3032114



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue

---

### Labeled terminal marker

Zack Marker strip, flat - ZBF 5 CUS - 0825025



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Marker for terminal blocks - UC-TMF 5 CUS - 0824638



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

Marker for terminal blocks - UCT-TMF 5 CUS - 0829658



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

### Marker carriers

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Marker carriers - CARRIER-TM 300 - 0828282



Marker carriers, gray, unlabeled, mounting type: snap into flat marker groove, lettering field size: 10.5 x 300 mm

---

### Neutral conductor rail

Neutral busbar - NLS-CU 3/10 SN 1000MM - 0402174



Neutral busbar, width: 10 mm, height: 3 mm, DIN VDE 0611-4: 1991-02, material: Copper, tin-plated, length: 1000 mm, color: silver

---

### Partition plate

Partition plate - ATP-PTI/3 - 3213990



Partition plate, length: 103 mm, width: 2.2 mm, height: 49.3 mm, color: gray

---

Spacer plate - DP PS-5 - 3036725



Spacer plate, length: 22.4 mm, width: 5.2 mm, height: 29 mm, number of positions: 1, color: red

---

### Planning and marking software

Software - CLIP-PROJECT ADVANCED - 5146040



Multilingual software for convenient configuration of Phoenix Contact products on standard DIN rails.

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Software - CLIP-PROJECT PROFESSIONAL - 5146053



Multilingual software for terminal strip configuration. A marking module enables the professional marking of markers and labels for identifying terminal blocks, conductors and cables, and devices.

---

### Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Actuation tool - ST-BW - 1207608



Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages

---

### Switching lock

Switching lock - S-MT - 3247954



Switching lock, length: 10.5 mm, width: 3.5 mm, height: 23.1 mm, color: white

---

### Terminal marking

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

#### Marker for terminal blocks - UC-TMF 5 - 0818153



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

#### Marker for terminal blocks - UCT-TMF 5 - 0828744



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

### Test plug terminal block

#### Test plugs - MPS-MT - 0201744



Test plugs, with solder connection up to 1 mm<sup>2</sup> conductor cross section, color: gray

#### Test plugs - PS-5 - 3030983



Test plugs, Modular test plug, color: red

#### Test plugs - PS-5/2,3MM RD - 3038723



Test plugs, color: red

### Test socket

## Installation ground terminal block - PTI 2,5-PE/L/NTB - 3213955

### Accessories

Test adapter - PAI-4-N GY - 3032871



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

---

### Warning label printed

Warning label - WS PT 2,5 - 1029026



Warning label, yellow/black, labeled: Lightning flash, mounting type: plug in, for terminal block width: 5.2 mm

---

Warning label - WS-DIO PT 2,5 - 1029037



Warning label, yellow/black, labeled: Diode, mounting type: plug in, for terminal block width: 5.2 mm

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[3213955](#)