

Feed-through header - FRONT-FMC 1,5/D28-MF-6,35 - 1714762

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal cross section: 1.5 mm², color: light gray, nominal current: 6 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Male connector, number of connections: 56, product range: FRONT-FMC 1,5/..-MF, pitch: 6.35 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3 mm, Locking: Screw locking, type of packaging: packed in cardboard



Your advantages

- ✓ Well-known mounting principle allows worldwide use
- ✓ Screwable flange for superior mechanical stability



Key Commercial Data

Packing unit	20 pc
Minimum order quantity	500 pc
GTIN	 4 055626 387765
GTIN	4055626387765

Technical data

Dimensions

Length [l]	13.2 mm
Width [w]	103.5 mm
Height [h]	16.2 mm
Pitch	6.35 mm


General

Range of articles	FRONT-FMC 1,5/..-MF
Number of positions	28
Nominal cross section	1.5 mm ²

Drawings

Feed-through header - FRONT-FMC 1,5/D28-MF-6,35 - 1714762

Diagram

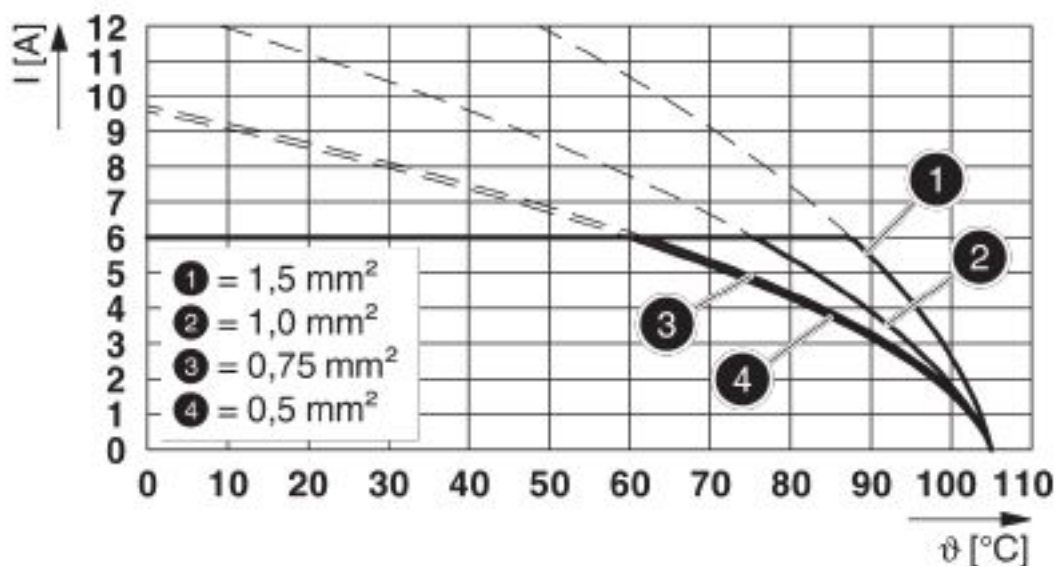

Type: FRONT-FMC 1,5/D...-FF-6,35-R with FRONT-FMC 1,5/D...-MF-6,35

Classifications

eCl@ss

eCl@ss 10.0.1	27440402
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 5.0	EC002637
ETIM 6.0	EC002637
ETIM 7.0	EC002637

Accessories

Additional products

Feed-through header - FRONT-FMC 1,5/D28-MF-6,35 - 1714762

Accessories

PCB connector - FRONT-FMC 1,5/D28-FF-6,35-R - 1714761



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 6 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, number of connections: 56, product range: FRONT-FMC 1,5/...-FF, pitch: 6.35 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, pin layout: Linear pinning, Locking: Screw locking, type of packaging: packed in cardboard

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1714762