SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED VOLTAGE	12	Vdc	
OPERATING VOLTAGE RANGE	9 ~ 28	Vdc	
RATED CURRENT (MAX)	15	mA	
INGRESS PROTECTION	IP65	-	
TYPICAL SPL @ 10 cm	106	dBA	
FREQUENCY RANGE	2,700 ~ 3,100	Hz	
SWEEP RATE	4	Hz	
CONTINUOUS TONE/ PULSING TONE	RED (+) & BLUE (-)/ RED (+) & BLACK (-)	-	
OPERATING TEMPERATURE	-40 ~ +80	°C	
CASE MATERIAL/COLOR	ABS/WHITE	-	
TERMINAL	LEAD WIRE	-	
WEIGHT	80	grams	

NOTES:

WITHOUT NOTICE.


1. ALL DIMENSIONS ARE IN MILLIMETERS.

3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY				
LTR	DESCRIPTION	DATE	APPROVED	
_	RELEASED FROM ENGINEERING	12/15/2005		
Α	ADDED RoHS NOTE	5/21/2007	R.W.	
В	REVISED PANEL MOUNT & HEIGHT DIMENSIONS	6/11/2010	B.R.	
С	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	6/11/2010	B.R.	

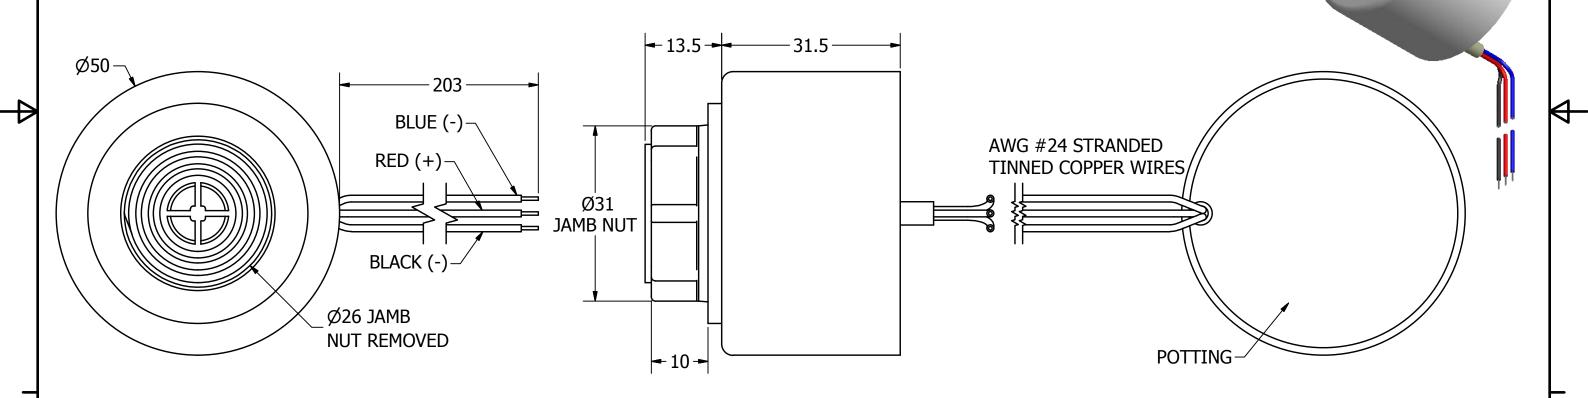

UNLESS OTHERWISE

SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS,

TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

AW-10PW-NSVC.idw

Designed by

J.A.F.

SIZE

Date

12/15/2005

Checked by

Date

12/15/2005

Approved by

B.R.

Siren

AW-10PW-NSVC

Date

12/15/2005 6/11/2010

Drawn Date

Sheet

1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: