

Description: 1608 2.4G&5GHz Diplexer

PART NUMBER: DPX1608LL66R2455A

Features:

Compact size: 1.6x0.8x0.6mm

· RoHS compliant

Applications:

• WLAN, 802.11a/b/g/n

ISM Band

ELECTRICAL SPECIFICATIONS

DESCRIPTION	VAI	VALUE	
Pass Band	Low Band	High Band	
Pass Ballu	2400~2500MHz	4900~6000MHz	
Insertion Loss	0.95dB (Max) at 25°C	0.90dB (Max) at 25°C	
Return Loss	10.0 dB (Min)	10.0 dB (Min)	
	25dB(Min).@700~960MHz	30dB(Min).@1200~1500MHz	
	10dB(Min).@960~1300MHz	25dB(Min).@1600~2000MHz	
Attenuation	28dB(Min).@4800~5000MHz	25dB(Min).@2300~2700MHz	
Attenuation	25dB(Min).@7200~7500MHz	15dB(Min).@2700~3000MHz	
		25dB(Min).@10000~11800MHz	
		15dB(Min).@15000~17700MHz	
Isolation	28dB(Min).@2400~2500MHz		
isolation	28dB(Min).@4	-800~5000MHz	
Operating Temperature	-40 ~	85°C	

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Description: 1608 2.4G&5GHz Diplexer


PART NUMBER: DPX1608LL66R2455A

MECHANICAL DIMENSION

Outline Mechanical Termination Top View Side View Dimension **Function Terminal name** L (mm) 1.60±0.15 High band P1 W (mm) 0.80±0.15 **GND** P2 T (mm) 0.60 ± 0.15 Low band **P3** P1 (mm) 0.20±0.15 P4 **GND** P2 (mm) P5 Common 0.20±0.15 ස් **GND** P3 (mm) P6 0.20±0.15 P2 P3 P4 (mm) 0.20 ± 0.15 P5 (mm) 0.20 ± 0.15 P6 (mm) 0.20±0.15 D1 (mm) 0.20±0.15 _ D2 Dl D2 (mm) 0.30 ± 0.10 D3 (mm) 0.15 ± 0.10

Reference design of EVB

Recommended PCB Pattern-

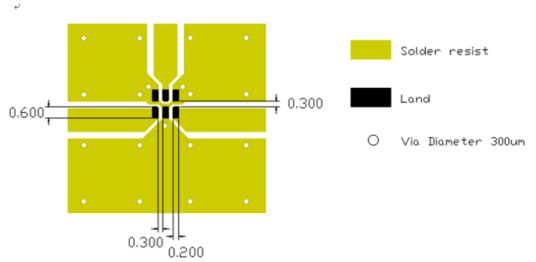

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.


RoHS



Description: 1608 2.4G&5GHz Diplexer

PART NUMBER: DPX1608LL66R2455A

ELECTRICAL PERFORMANCES

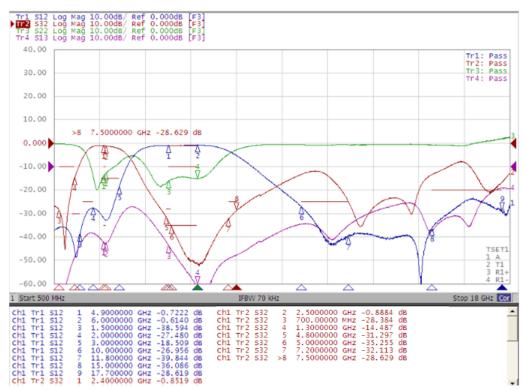

- Measured on Agilent E5071C Network Analyzer
- Common port : Port 2 (Return loss : S22)
 - High band port : Port 1 (High band Insertion loss S12, and attenuation at high band)
- Low band port : Port 3 (Low band Insertion loss S32, and attenuation at low band)

Frequency Characteristics





Description: 1608 2.4G&5GHz Diplexer

PART NUMBER: DPX1608LL66R2455A

		REVISION HISTORY	
Revision	Date	Description	
Version 1	Oct. 06, 2020	- New issue	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

DPX1608LL66R2455A