

Description: 1003 GPS &2.4GHz Chip Antenna

PART NUMBER: ANT1003LL15R1524A

Features:

- Size: 9.90x3.20x1.47 mm
- Cover dual frequency bands in 2.4 & 1.575 GHz
- Omni-directional Radiation
- Tape & reel automatic mounting
- · Reflow process compatible
- RoHS compliant

Applications:

- Tablet
- Navigation device
- Telematics box
- Fleet management
- 2.4 GHz WiFi device
- Bluetooth gadget
- Zigbee device
- ISM band equipment

ELECTRICAL SPECIFICATIONS

Working Frequency
Bandwidth
Gain
Polarization
Azimuth Beamwidth

Impedance
Operating Temperature
Maximum Power
Termination
Resistance to Soldering Heats

1.575 GHz / 2.45 GHz 15 MHz(Typ.) / 84 MHz (Typ.) 6.49 dBi Min. Linear Omni-directional 1.15 dBi / 2.90 dBi 50 Ω

- 40~105 °C

Ni / Sn (Environmentally-Friendly Leadless)

260°C , 10sec.

NOTE

1. The specification is defined on Pulse evaluation board

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and rederal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Description: 1003 GPS &2.4GHz Chip Antenna

PART NUMBER: ANT1003LL15R1524A

MECHANICAL DRAWING

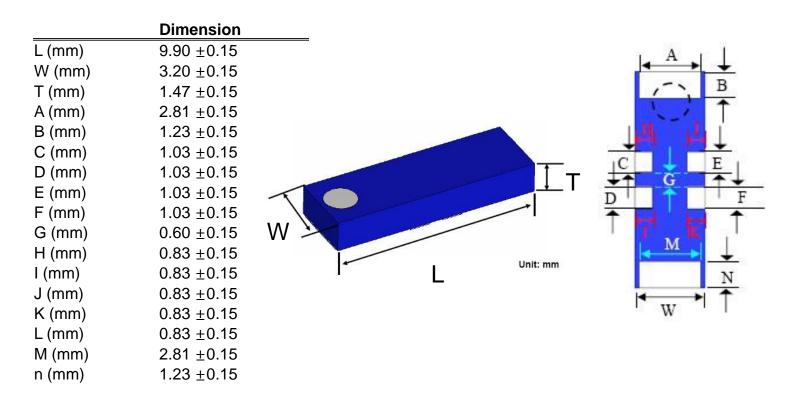


Terminal name	Function	Terminal name	Function
A	Feed BT / GND	H	GND
В	Feed BT / GND	I	GND
С	GND	J	GND
D	GND	K	GND
Е	GND	M	Feed GPS / GND
F	GND	Ν	Feed GPS / GND



Description: 1003 GPS &2.4GHz Chip Antenna

PART NUMBER: ANT1003LL15R1524A

REFERENCE DESIGN OF EVALUATION BOARD

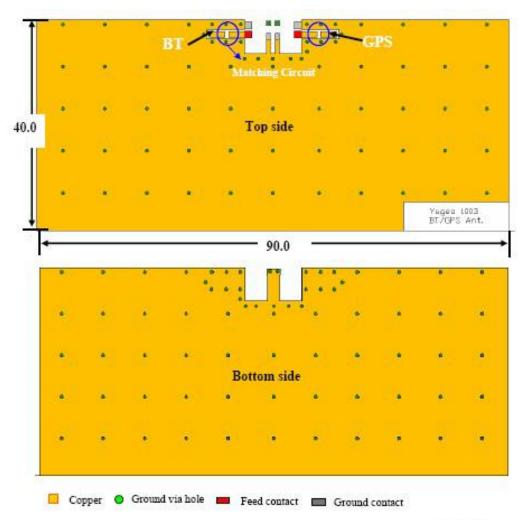

Unit: mm


Outlook and dimension of evaluation board




Description: 1003 GPS &2.4GHz Chip Antenna

PART NUMBER: ANT1003LL15R1524A

REFERENCE DESIGN OF EVALUATION BOARD

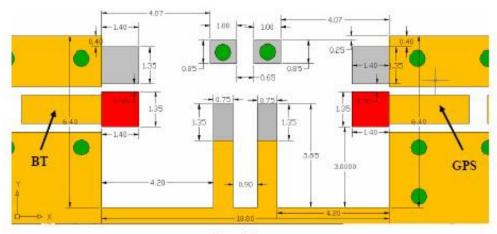

Top side

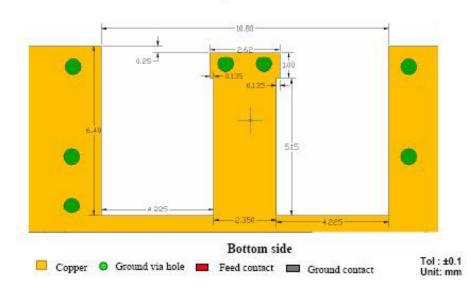


Details of soldering Pad



Description: 1003 GPS &2.4GHz Chip Antenna

PART NUMBER: ANT1003LL15R1524A

ELECTRICAL PERFORMANCES

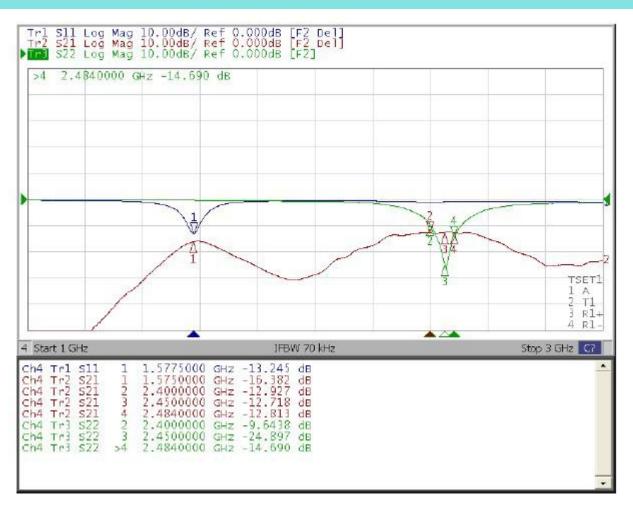

Return loss



Description: 1003 GPS &2.4GHz Chip Antenna

PART NUMBER: ANT1003LL15R1524A

ELECTRICAL PERFORMANCES

Radiation Pattern_1.575z GHz Radiation Pzzattern_2.45 GHz Model name Test mode Model name Test mode 1003 BT 3D 1003 GPS 3D Test frequency / Polarization Test frequency / Polarization Test date 1575.00 MHz / Vector sum 2011/12/15 2450.00 MHz / Vector sum 2011/12/15 Gsin(dBl) Gain(dBi) 5.00-F 5.00-F X4,1,5 0.00-0.00 -5.00 -5.00--10.00 -10.00--15.00 -15.00--20.00--20.00 -25.00 -25.00--30.00 -30.00 -35.00--35.00-Max gain= 2.90dBi, at (120, 0) Max gain = 1.15dBi, at (0, 0) MEG(mean effective gain) = -0.79dBi MEG(mean effective gain)= -1.41dBi Directivity(dB) - 3.79 Directivity(dB) = 2.90 Efficiency= -1.75dB, 66.83% Efficiency= -0.89dB, 81.55%

Radiation pattern



Description: 1003 GPS &2.4GHz Chip Antenna

PART NUMBER: ANT1003LL15R1524A

REVISION HISTORY				
Revision	Date	Description		
Version 1	Nov. 19, 2020	- New issue		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

ANT1003LL15R1524A